IR LED Illuminator



FEATURES

- Compact chassis
- Invisible with 950nm wavelength
- MTBF > 100,000 hours

SP	EC	IIFI	CA	\TI	OI	12	
							_

Optical Wavelength	940 nm
Max. IR Distance	17 m
Beam Angle	60x40°
IP Class	66
MTBF at 25° C	> 100,000 hours
Supply Voltage	12 VDC +6%, -6%
Power Consumption	14 W
Weight	0.8 kg
Dimensions w*h*d	110 x 100 x 51 mm



Design and specifications are subject to change without notice


Status 12/2007

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com

IR LED Illuminator

DIMENSIONS

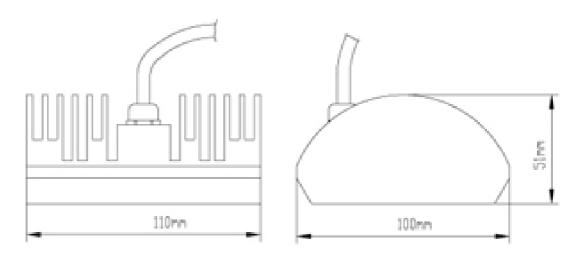

ACCESSORIES



ASTST1 IR LED Illuminator wall bracket



ASTST2
IR LED Illuminator wall bracket



ASTST3
IR LED Illuminator wall bracket



Design and specifications are subject to change without notice

Status 12/2007

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com