AST IR294XXL30

IR LED Illuminator





FEATURES

Compact chassis
 MTBF > 100,000 hours

SPECIFICATIONS

| Optical Wavelength | 880 nm |
|--------------------|------------------------|
| Max. IR Distance | 270 m |
| Beam Angle | 30° |
| Protection Rating | IP66 |
| MTBF at 25° C | > 100,000 hours |
| Supply Voltage | 12 VDC / 220 VAC |
| Including | Bracket & PSU included |
| Power Consumption | 84 W |
| Weight | 4.5 kg |
| Dimensions w*h*d | 236 x 270 x 272 mm |



Design and specifications are subject to change without notice

Status 02/2009

 AASSET SECURITY SA

 153, rue Michel Carré

 F-95100 Argenteuil

 Tel:

 +33(0)1

 50, rue Michel Carré

 F-95100 Argenteuil

 Tel:

 Fax:

 +33(0)1


 Fax:

 Fax:

info@aasset-security.com www.aasset-security.com


AST IR294XXL30

IR LED Illuminator





Angles of view

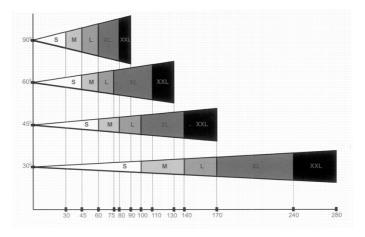



Design and specifications are subject to change without notice

Status 02/2009

AASSET SECURITY SA 153, rue Michel Carré Tel: +33(0)1 30 76

F-95100 Argenteuil

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com

IR-Illuminator

IR LED Illuminator

ACCESSORIES



AST ST3 IR LED Illuminator wall bracket





Design and specifications are subject to change without notice

AASSET SECURITY SA 153, rue Michel Carré Tel: +33(0)1 30 76

F-95100 Argenteuil

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com

Status 02/2009