


BOSCH

Invented for life

ISC-PDL1-WA18x Professional Series TriTech+ Detectors with Anti-mask



- ▶ **18 m x 25 m (60 ft x 80 ft) standard coverage, 8 m x 10 m (25 ft x 33 ft) selectable short range coverage**
- ▶ **EN50131-2-4 Grade 3 compliant**
- ▶ **Sensor data fusion technology**
- ▶ **Tri-focus optics technology**
- ▶ **Range adaptive radar**
- ▶ **MANTIS anti-mask**
- ▶ **Active white light suppression**
- ▶ **Dynamic temperature compensation**
- ▶ **Remote walk test**
- ▶ **Alarm memory**

The ISC-PDL1-WA18x Professional Series TriTech+ Detectors with Anti-mask are exceptionally suited for commercial indoor applications. MANTIS anti-mask technology makes obscuring the detector view nearly impossible for intruders. Sensor data fusion technology ensures that the detector sends alarm conditions based on precise information. Tri-focus optics eliminate coverage gaps and respond efficiently to intruders. The powerful combination of unique features in the Professional Series delivers superior catch performance and virtually eliminates false alarms.

The self-locking two-piece enclosure, built-in bubble level, flexible mounting height, and three optional mounting brackets simplify installation and reduce service time.

Functions

Sensor Data Fusion Technology

Sensor data fusion technology is a unique feature that uses a sophisticated software algorithm to gather signals from five sensors: two pyroelectric sensors, a range adaptive radar sensor, a room temperature sensor, and a white light level sensor. The microcontroller analyzes and compares the sensor data to make the most intelligent alarm decisions in the security industry.

Tri-focus Optics Technology

Tri-focus optics technology uses optics with three specific focal lengths: long-range coverage, middle-range coverage, and short-range coverage. The detector applies the three focal lengths to 86 detection zones, which combine to make 11 solid curtains of detection. Tri-focus optics technology also includes two pyroelectric sensors, which deliver twice the standard optical gain. The sensors process multiple signals to deliver precise performance virtually free of false alarms.

Range Adaptive Radar

The microwave transceiver automatically adjusts its detection thresholds based on input from the PIR sensors. Integrating the target distance information from the PIR significantly reduces false alarms from the microwave Doppler radar.

MANTIS Anti-mask Technology

MANTIS (**M**ulti-point **A**nti-mask with **I**ntegrated **S**pray detection) uses patented prism lenses and active infrared detection to provide industry-leading protection against all known forms of attack. MANTIS complies with the latest worldwide regulatory standards for detecting objects covering or placed in front of the detector. MANTIS is sensitive to materials regardless of texture or color, including fabric, paper, metal, plastic, tape, and spray. When MANTIS identifies a masking material, the detector sends a supervision anti-mask signal to the control panel.

Active White Light Suppression

An internal light sensor measures the level of light intensity directed at the face of the detector. Sensor data fusion technology uses this information to eliminate false alarms from bright light sources.

Available Coverage

The standard coverage is 18 m x 25 m (60 ft x 80 ft). Installers can set a DIP switch at the detector to select short range coverage of 8 m x 10 m (25 ft x 33 ft).

Dynamic Temperature Compensation

The detector automatically adjusts PIR sensitivity to identify human intruders at critical temperatures. Dynamic temperature compensation detects human body heat accurately, avoids false alarms, and delivers consistent catch performance at all operating temperatures.

Cover and Wall Tamper Switch

When an intruder removes the cover or attempts to separate the detector from the wall, a normally-closed contact opens to alert the control panel.

Self-adjusting LEDs

The LED brightness adjusts automatically to the surrounding light level. A blue light-emitting diode (LED) indicates TriTech+ alarms and activates during a walk test. A yellow LED indicates microwave alarms, and a red LED indicates PIR alarms.

Remote Walk Test LED

Users can enter a command through a keypad, a control center, or programming software to remotely enable or disable the walk test LED.

Alarm Memory

Alarm memory flashes the alarm LED to indicate stored alarms for use in multiple unit applications. A switched voltage from the control panel controls the alarm memory.

Solid State Relays

Solid state relays send silent alarm output signals to provide a higher level of security and reliability. An external magnet does not activate the relay. The solid state relay uses less current than a mechanical relay, providing longer standby capacity during a power loss.

Draft, Insect, and Small Animal Immunity

The sealed optic chamber provides immunity to drafts and insects, reducing false alarms. Small animal immunity reduces false alarms caused by animals less than 4.5 kg (10 lb), such as rodents.

Remote Self Test

A remote self test initiates when the walk test input switches to its true state. The alarm relay and alarm LED activate for four seconds following a successful test. The trouble relay activates, and the alarm LED flashes following a failed test.

Input Power Supervision

When the power is lower than 8 V, a low input power trouble condition activates the trouble relay and causes the LED to flash. The trouble condition clears automatically when power reaches or exceeds 8 V.

Trouble Memory

When the walk test input switches to its true state for less than two seconds, the LED flashes to indicate the most recent trouble condition. If there is no trouble in memory, the LED does not flash. After twelve hours, or after the detector receives a second walk test pulse for two seconds or less, the LED stops flashing and the trouble memory clears.

DIP Switch Programming


The following functions are all programmed using DIP switch settings:

- Local Walk Test LED
- Remote Walk Test Input Polarity
- Alarm Memory Polarity
- Long and Short Range Select
- MANTIS Anti-mask On and Off


Certifications and Approvals

Region	Certification	
Europe	CE	2004/108/EC EMC Directive; 1999/5/EC Radio Equipment and Telecommunications Terminal Equipment, Annex V, EN 55022: 1998, +A2: 2003, ClassB; EN 50130-4:1995, +A1: 1998, +A2: 2003; IEC 60950-1: 2001, EN 60950-1: 2001; EN 300 440-2, V1.1.2 (2004-07)
	EN50131	G or H only: EN 50131-1, TS 50131-2-2 August 2004, RT 50132-2-2 July 2007, TS 50131-2-4 July 2007, RT 50131-2-4 July 2007, EN 50130-4, EN50130-5
Belgium	INCERT	WA18x models: B-509-0052/a
Poland	TECHOM	WA18G model: 25/08 Klasy "S"
France	AFNOR	WA18H model: NF et A2P (NF 324 - H 58) Type 3
Sweden	INTYG	WA18G model: 08-235
the Netherlands	NCP	WA18G model: ITD08502-PI Klasse 3 ITD08503-PI Klasse 3
The detectors are designed to also comply with requirements of:		
USA	UL	cULus -UL639, Intrusion Detection Units
	FCC	Complies with Part 15

Installation/Configuration Notes

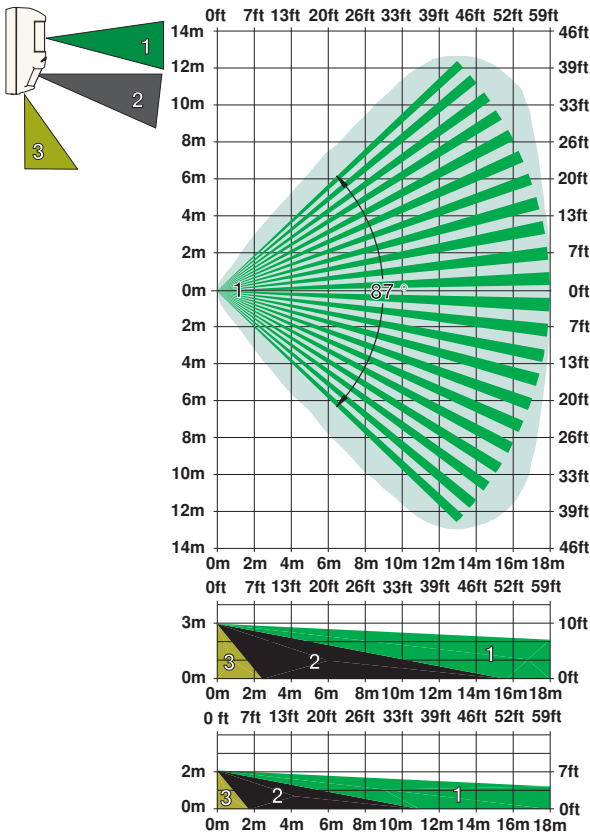

Long-range Coverage 18 m x 25 m (60 ft x 80 ft)

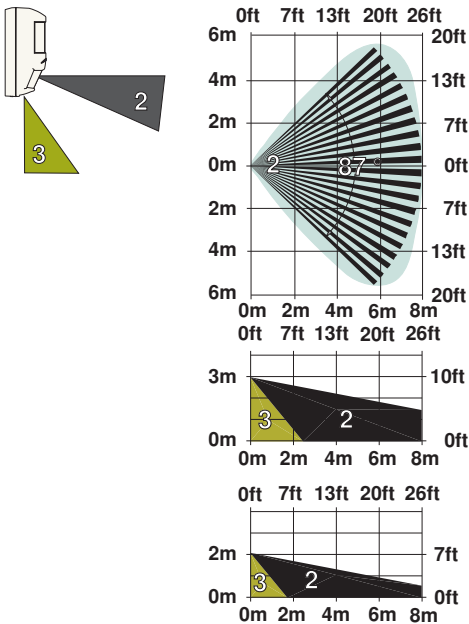

Selectable Short-range Coverage 8 m x 10 m (25 ft x 33 ft)

Mounting Considerations

The recommended mounting height is 2 m to 3 m (7 ft to 10 ft).

Use an optional B328 Gimbal-mount Bracket or B335-3 Low-profile Swivel-mount Bracket to surface-mount the detector on a flat wall or in a corner.

Use an optional B338 Universal Ceiling Bracket to mount the detector on the ceiling.

Wiring Considerations

Recommended wire size is 0.2 mm² to 1 mm² (26 AWG to 16 AWG).

Parts Included

Quantity	Component
1	Detector
2	Flat-head screws
2	Screw anchors
1	Nylon cable tie
1	Pattern Mask
1	Installation Guide

Technical Specifications

Electrical

Power Requirements

Voltage (Operating):	9 VDC to 15 VDC
Current (Maximum):	< 26 mA with alarm, trouble, and LEDs active.
Current (Standby):	18 mA at 12 VDC

Outputs for All Models

Tamper:	Normally-closed (NC) contacts (with cover on) rated at 25 VDC, 125 mA maximum. Connect tamper circuit to 24-hour protection circuit.
Trouble:	Solid state relay normally-closed (NC) contacts.

Outputs for ISC-PDL1-WA18G and ISC-PDL1-WA18H

Relay:	Solid state relay, normally-closed (NC) contacts, power supervised. 3 W, 125 mA, 25 VDC, resistance < 10 Ω.
--------	---

Outputs for ISC-PDL1-WA18GB

Relay:	Solid state relay, normally-open (NO) contacts, power supervised. 3 W, 125 mA, 25 VDC, resistance < 10 Ω.
--------	---

Mechanical**Enclosure Design**

Color:	White
Dimensions:	127 mm x 69 mm x 58 mm (5 in. x 2.75 in. x 2.25 in.)
Material:	High-impact ABS plastic

Indicators

Alarm Indicator:	<ul style="list-style-type: none"> • Blue LED for TriTech+ alarms • Yellow LED for microwave alarms • Red LED for PIR alarms
------------------	---

Zones

Zones:	86
--------	----

Environmental

Relative Humidity:	0 to 95%, non-condensing
Temperature (Operating and Storage):	-30°C to +55°C (-22°F to +130°F) <i>For AFNOR certificated installations,</i> -10°C to +55°C (+14°F to +130°F) <i>For UL Certificated installations, 0°C to +49°C</i> (+32°F to +120°F)
Environmental Class II	EN 50130-5
Protection Rating:	IP 41, IK04 (EN 60529, EN 50102)

Ordering Information

ISC-PDL1-WA18G TriTech Detector with Anti-mask 10.525 GHz frequency.	ISC-PDL1-WA18G
--	-----------------------

ISC-PDL1-WA18GB TriTech Detector with Anti-mask 10.525 GHz frequency. Includes solid state relay, normally-open (NO) alarm contacts.	ISC-PDL1-WA18GB
--	------------------------

ISC-PDL1-WA18H TriTech Detector with Anti-mask 10.588 GHz frequency. For use in France and the United Kingdom.	ISC-PDL1-WA18H
--	-----------------------

Accessories

B328 Gimbal-mount Bracket Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.	B328
---	-------------

Swiveling B335-3 low-profile mount Swiveling, low-profile, plastic mount for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Available in triple packs.	B335-3
--	---------------

B338 universal ceiling mount Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.	B338
---	-------------

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3453
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com