waterproof keypad

AS626/826

The Alpro Waterproof Keypads are simple to install and user friendly. These aesthetically designed and vandal resistant keypads are suitable for up to 200 users.
Available as either a Self Contained or Two Part Access Control System. Slim and secure with no moving parts they are manufactured to highest standards for external or internal use.

No Moving Parts
Solid state Piezo technology

Waterproof – IP68 Certificated
Highest certification available

Slimline Design
44.5mm wide x 181mm long

Tamper Resistant
Security plugs provided

Vandal Resistant
One piece solid housing

Variable Length Codes
From 4 to 8 digit codes can be used simultaneously

Electrical Features
2 amp changeover relay
12v AC or 12-24v DC (±10%) power 120mA max

Visual & Audible Feedback
Timeout functions for code entry and programming

Up to 200 User Codes
100 million combinations 4 to 8 digit codes

Non Volatile Memory

Anodized Graphics
Long life - wear resistant

Approvals
CE and UL
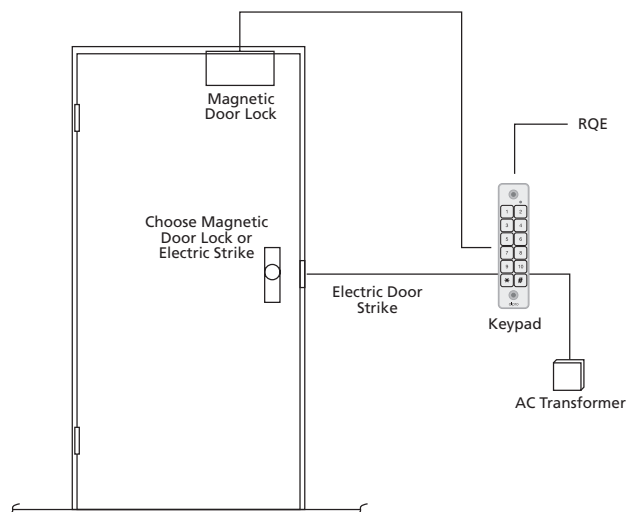
Also available...
The Alpro HID Prox Keypad.

A combination of a virtually indestructable keypad with a HID Reader offers the security industry the best of both worlds for the first time.

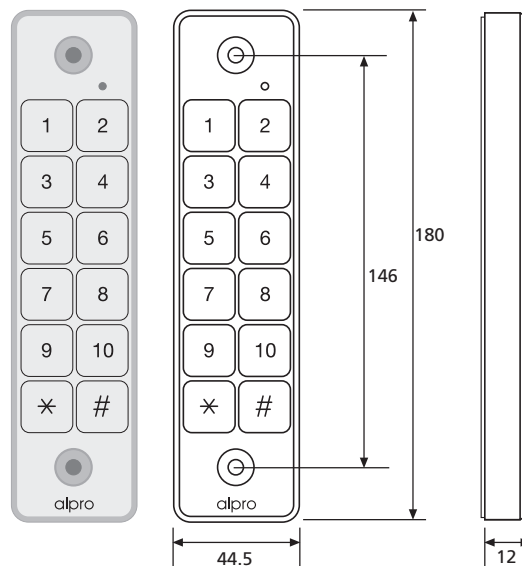Ordering and technical information available on request.

NEW Slimmer Body

5 YEAR GUARANTEE

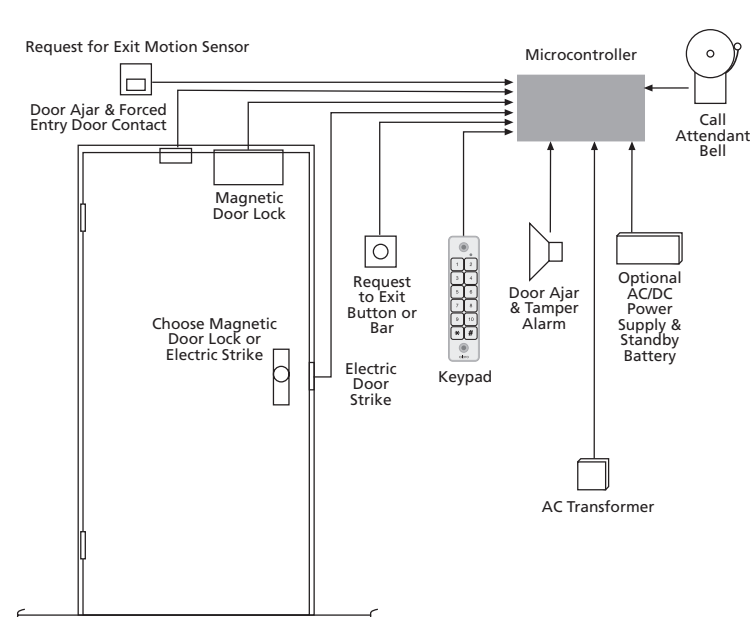| DESCRIPTION	CODE
Self Contained Single Door Access Control - 200 Users	
Slim Surface Mount, 2x6, 2 LED, Outdoor/Indoor, Bright Aluminium	**AS-626S-200/3M**
Slim (Flush) Mortice Mount, 2x6, 2 LED, Outdoor/Indoor, Bright Aluminium	**AS-626M-200**
Single Door Two Part Access Controller System - 200 Users	
Slim Surface Mount, 2x6, 2 LED, Outdoor/Indoor, Bright Aluminium	**AS-826S-200**
Slim (Flush) Mortice Mount, 2x6, 2 LED, Outdoor/Indoor, Bright Aluminium	**AS-826M-200**
Accessories	
Cable, replacement, between Keypad and Controller. 3 metres of cable with connectors	**AST10CABLE**

Self Contained Single Door Access Control - 200 Users

Magnetic Door Lock

RQE

Choose Magnetic Door Lock or Electric Strike

Electric Door Strike

Keypad

AC Transformer

Slim Surface

180
146
44.5
12

Single Door Two Part Access Controller System - 200 Users

Request for Exit Motion Sensor

Door Ajar & Forced Entry Door Contact

Microcontroller

Call Attendant Bell

Magnetic Door Lock

Request to Exit Button or Bar

Door Ajar & Tamper Alarm

Optional AC/DC Power Supply & Standby Battery

Choose Magnetic Door Lock or Electric Strike

Electric Door Strike

Keypad

AC Transformer

Slim Mortice

21
180
146
44.5
15