

# JustView

## Hidden HD Micro IR Dome Network Camera

JustView series is a flat profile micro dome cameras that support audio and video synchronous recording. The optional PoE or WIFI eliminates the need for separate power cables which makes the installation easier. JustView series is hardly noticeable for locations that require a small camera appearance with discrete monitoring and true Day/Night functionality.




### Key Features

- ▶ High Definition up to 4M
- ▶ True Day/Night Functionality with Removeable IR Cut Filter
- ▶ Built-in Hi-sensitivity Mic
- ▶ Anviz Smart Stream
- ▶ Smart Edge Storage
- ▶ Compact Mini Design
- ▶ Motion Detection
- ▶ IR Anti-reflection Shield


#### ▶ IR Anti-reflection Shield

High Polymer IR anti-reflection shield can effectively increase the transmittance of infrared light

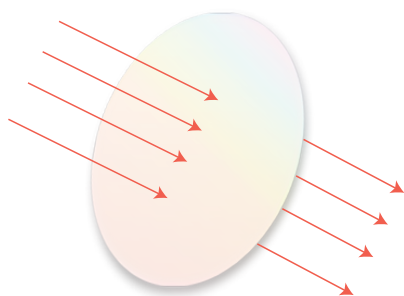

#### ▶ Built-in Hi-sensitivity Mic

The JustView has a built-in microphone, eliminating the need to install separate audio connectors on site.



### Technical Specifications

Type	JU4502-IWRE	JU4502-IRE	JU2702-IRE
Resolution	2 Megapixel	2 Megapixel	4 Megapixel
Image Sensor	1/2.8" CMOS	1/2.8" CMOS	1/3" CMOS
Shutter Time	1/3s-1/100000s	1/3s-1/100000s	1/3s-1/100000s
Frame rate	50HZ: 25fps(1280×720) 60HZ: 30fps(1280×720)	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)	50HZ: 20fps(2560×1440) 60HZ: 20fps(2560×1440)
Lens	0.1 Lux (Color) / 0.01 Lux(B/W) > 52dB	0.01 Lux (Color) / 0.001 Lux(B/W) > 52dB	0.05 Lux (Color) / 0.005 Lux(B/W) > 52dB
Horizontal Angle of View	4mm/F1.6	4mm/F1.6	4mm/F1.6
Minimum Illumination	m12	m12	m12
SN Ratio	77°	77°	77°

Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS	WIFI	Wireless Standard	E802.11b, 802.11g, 802.11n
	Interface Protocol	ONVIF		Transmission Distance	Outdoor: 100m Indoor: 40m (vary with the environment)
	Multistream	Support main stream and sub stream		IR	IR Range
Compression	Video Compression	H.264/MJPEG, , Smart H.264	IR Control		Intelligently adjust the IR brightness and angle according to scene
	H.264 Code Type	BaseLine Profile / Main Profile / High Profile	Interface	Ethernet	RJ-45 (10/100/1000Base-T)
	Compression Output Bitrate	32 Kbps~8Mbps		Audio	1 Mic in
	Audio Compression	G.711(64Kbps)		SD Card	Built-in SD card slot, supports Micro SD / SDHC / SDXC card (up to 64G)
Image	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser	General	Operating Conditions	-10°C to 50°C (14°F to 122°F)
	Day/Night	IR-CUT		Power Supply	DC12V/PoE(802.3af)(-E model)
	BLC	Support		Power Consumption	MAX 12W
	WDR	Support		Weight	155g (0.34pounds)
	DNR	3D DNR		Dimensions	Φ100*48mm (Φ3.94"*1.89")
	Privacy Mask	Support maximum 4 areas in one picture, various colors available		Safety Certifications	CE, FCC, RoHS
Smart Function	Smart Detection	Motion detection			