

MegaBall® 2 IP Megapixel Cameras

1.2–5MP H.264 All-in-One Motorized P-Iris or Panomorph Lens True Day/Night Indoor IP Cameras with WDR (Wide Dynamic Range) and STELLAR™ (Spatio Temporal Low Light Architecture) Models

Remote Focus/Zoom Models

1.2 Megapixel	1080p	1080p WDR	3 Megapixel	3 Megapixel WDR	5 Megapixel
AV1245PMIR-SB-LG	AV2245PM-D-LG	AV2246PMIR-SB-LG	AV3245PM-D-LG	AV3246PMIR-SB-LG	AV5245PM-D-LG
	AV2245PM-B-LG	AV2246PM-B-LG	AV3245PM-B-LG	AV3246PMIR-SBA-LG	AV5245PM-B-LG
	AV2245PMIR-SB-LG		AV3245PMIR-SB	AV3246PM-B-LG	AV5245PMIR-SB-LG
	AV2245PMIR-SBA-LG				AV5245PMIR-SBA-LG

Panomorph Models

5 Megapixel
AV5245PM-01-D-LG
AV5245PMIR-01-SB-LG
AV5245PMIR-01-SBA-LG



Bell Mount (-B-LG)*

Bell Mount with IR Illuminator (IR-B-LG)

Flush/Surface Mount Panomorph Lens Shown (01-D-LG)**



Optional Manual ImmerVision Enables® Panomorph Lens Available on 5MP Models

* Junction Box Sold Separately
 ** Dome Models can be configured with or without a dome bubble.

Stylish MegaBall® 2 multi-megapixel cameras provide ample resolution to zoom-in for details in live or recorded video. These indoor all-in-one solutions integrate a 1.2, 3 or 5-megapixel (MP) camera with fast frame rates and a remote focus/zoom P-iris lens with flush and surface mount dome housing. On 5MP models, an optional manual lens with an ImmerVision Enables® panomorph system offers 180° and 360° views. H.264 compression

reduces network bandwidth and storage requirements while delivering full frame rates and full resolution without sacrificing image quality. Day/Night functionality allows for 24-hour surveillance. Wide Dynamic Range (WDR) up to 100dB at full resolution balances light and dark areas in the same scene (1080p and 3MP). Binning mode for increased low light sensitivity is available for 3MP and 5MP cameras.

Integrated Motorized Lens with Remote Focus and Zoom	P-Iris Control for Best Depth of Field and Image Clarity	Panomorph Lens (-01 Models)	STELLAR™ Low Light Technology on 1.2MP Models	All-in-One Ball Solution	Smart IR LEDs (IR Models)	Integrated Microphone (-A Models)	True Day/Night with IR Cut Filter	Pixel Binning Mode on 3 and 5MP Models	Wide Dynamic Range Available on Some 1080p and 3MP Models	Casino Mode™ Maintains at Least 30fps on AV2245 Models

Features:

- Remote Focus/Zoom P-Iris Lens
- P-Iris Control to Get Best Depth of Field and Image Clarity
- STELLAR™ (Spatio Temporal Low Light Architecture) Reduces Motion Blur, Noise and Storage Requirements, While Enhancing Contrast and Allowing Color Imaging in Near Complete Darkness on 1.2MP Models
- Optional True WDR up to 100dB at Full Resolution Available on Some 1080p and 3MP Models: See Clearly in Shaded and Bright Light Conditions Simultaneously
- Integrated Panomorph Solution for 180° and 360° Fields of View (-01 Models)
- Light Gray Dome and Bell Mount Options
- Casino Mode™ Guarantees Continuous 30fps Frame Rate Required by Gaming Industry Regulations (AV2245 Models)
- Binning Mode for Strong Low Light Performance on 3MP and 5MP Resolutions
- True Day/Night Functionality with Mechanical IR Cut Filter and Smart IR LEDs
- Tamper-Resistant Housing
- Integrated Microphone and Audio Out (-A Models Only)
- Installer Friendly Cable Management, 3-Axis Adjustment, In-Ceiling and Surface Mount Dome
- PoE and Auxiliary Power: 12–48V DC/24V AC
- Dual Encoder H.264/MJPEG
- Privacy Mask, Motion Detection, Flexible Cropping, Bit Rate Control, Multi-Streaming and Forensic Zooming
- Fast Frame Rates
- SDHC Card Slot for Onboard Storage (-S Models)
- New User-Friendly Web Interface
- Reduced Overall System Cost




Model Specific Features

Model	Resolution	Frame Rate	Features		
AV1245	1.2MP	00fps	-	-	STELLAR™
AV2245	1080p	31fps	-	Casino Mode™	-
AV2246	1080p	30fps	WDR	-	-
AV3245	3MP	21fps	-	-	Binning
AV3246	3MP	21fps	WDR	-	Binning
AV5245	5MP	14fps	-	-	Binning

Build-to-Order Options

-A	Audio
-B	Bell Mount
-D	Dome or Recessed Dome Model
-LG	Light Gray Dome
PM	Remote Zoom, Remote Focus, P-Iris, True Day/Night
PMIR	Wide Angle Lens w/ Remote Focus/Zoom, P-Iris, True Day/Night, IR LEDs
-S	SDHC Card Slot, CorridorView™ w/ 90° Image Flip, Non-Integer Scaling
-01	Manual Panomorph Lens, True Day/Night

Create Your Model (Example: AV3245PM-D-LG)

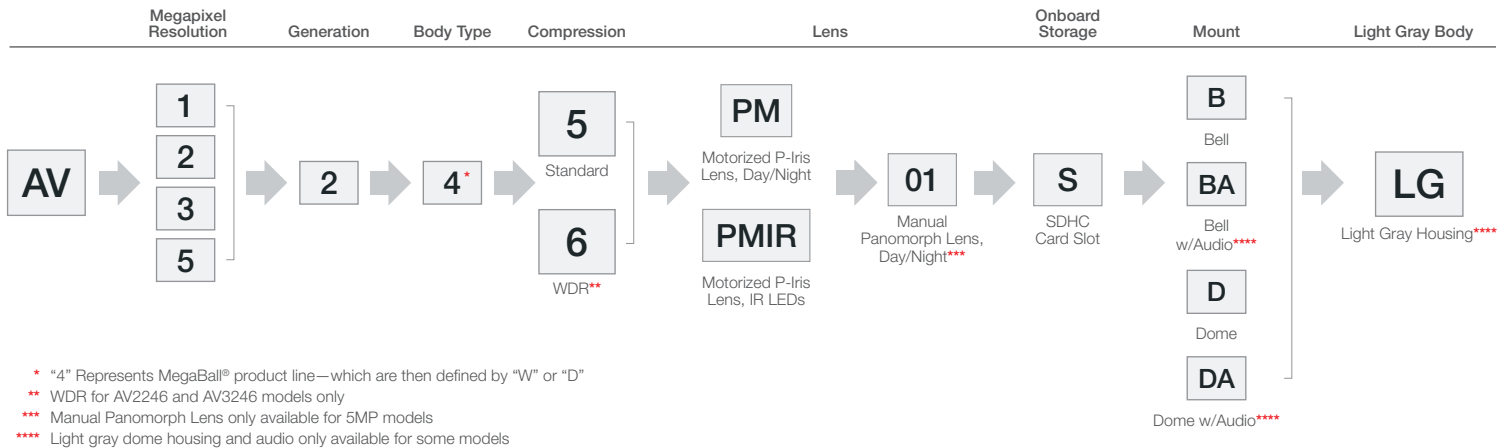

Camera Imaging Specifications

Model	AV1245	AV2245	AV2246	AV3245	AV3246	AV5245	
Image Sensor (CMOS)	1.2MP*	1080p	1080p**	3MP**	3MP	5MP	
Day/Night	True Day/Night with Automatic Removable IR Cut Filter						
Optical Format	1/0.0"	1/2.7"	1/3.2"	1/2.5"	1/3.2"	1/2.5"	
Pixel Pitch	0µm	3µm	2.2µm	2.2µm	2.2µm	2.2µm	
Minimum Illumination	Color (Day Mode)	0.0 Lux	0.1 Lux	0.3 Lux	0.3 Lux	0.3 Lux	
	Color Binning (Day Mode)	-	-	-	0.15 Lux	0.15 Lux	
	B/W (Night Mode)	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive
Full FOV Resolution	0000 H x 0000 V	1920 H x 1080 V	1920 H x 1080 V	2048 H x 1536 V	2048 H x 1536 V	2592 H x 1944 V	
1/4 Resolution	000 H x 000 V	960 H x 540 V	960 H x 540 V	1024 H x 768 V	1024 H x 768 V	1296 H x 972 V	
Dynamic Range	00dB	69dB	WDR up to 100dB	70.1dB	WDR up to 100dB	70.1dB	
Maximum SNR	00dB	45dB	49dB	45dB	49dB	45dB	
Frame Rates	At Max Resolution	00fps (0000 x 0000)	31fps (1920 x 1080)	30fps (1920 x 1080)	21fps (2048 x 1536)	21fps (2048 x 1536)	14fps (2592 x 1944)
	Cropped	00fps (0000 x 0000)	42fps (1280 x 1024)	41fps (1280 x 1024)	29fps (1920 x 1080) 41fps (1280 x 1024)	30fps (1920 x 1080) 41fps (1280 x 1024)	21fps (2048 x 1536) 29fps (1920 x 1080) 41fps (1280 x 1024)
	Binning Mode	-	-	-	46fps (1024 x 768) 64fps (960 x 540)	21fps (1024 x 768) 27fps (800 x 600) 31fps (960 x 540) 32fps (640 x 512)	34fps (1296 x 972) 46fps (1024 x 768) 64fps (960 x 540)
Lens	Motorized Lens	0-0mm, 1/0.0", F0.0 H-FOV = 000°-00°	3-10mm, 1/2.7", F1.3 H-FOV = 117°-36°	3-10mm, 1/2.7", F1.3 H-FOV = 81°-26°	3-10mm, 1/2.7", F1.3 H-FOV = 86°-28°	3-10mm, 1/2.7", F1.3 H-FOV = 86°-28°	3.4-10mm, 1/2.5", F1.4 H-FOV = 102°-35°
	Manual Panomorph ImmerVision Enables® A8TRT Lens	-	-	-	-	-	0.98mm (Short Axis) 1.12mm (Long Axis) F2.0, H-FOV = 182°
Remote Focus / Remote Zoom / P-iris	Yes	Yes	Yes	Yes	Yes	Yes	
IR Corrected	Yes	Yes	Yes	Yes	Yes	Yes	

* STELLAR™ Model ** Effective

Data Transmission	Compression Type	H.264 (MPEG-4, Part 10)/Motion JPEG 21 levels of quality
	Transmission Protocols	RTSP, RTP/TCP, RTP/UDP, HTTP, DHCP, TFTP 100Base-T Ethernet Network Interface
	Multi-Streaming	8 non-identical streams

Programmability	Remote focus, remote zoom and P-iris control (PM models)
	Motion Detection and privacy mask with 1024 detection zones
	Auto adjustment between WDR and LDR modes (WDR models only)
	Programmable shutter speed to help control motion blur
	Pixel Binning Mode (3MP and 5MP)
	Casino Mode™ maintains 30fps (AV2245 model)
	Flexible Cropping (resolution windowing down to 1x1 pixel for JPEG and 2x2 pixels for H.264)
	Low light noise filter control
	Bit rate and bandwidth limitation control
	Backlight compensation and multi-matrix white balance
	50/60Hz selectable flicker control
	Electronic pan, tilt, zoom (PTZ)
	180° image flip or CorridorView™ (90°, 180° and 270° image rotation) on -S models
	Programmable resolution, brightness, saturation, gamma, sharpness, tint


Compliance	Industry Standard	ONVIF Profile S and PSIA Conformant
	Listings	UL (CB)
	FCC Compliance	47 CFR 15 Class A
	Environmental	RoHS, REACH, WEEE
	Markings	(CE) EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN60950

Environmental	Operating temperature	-5°C (-23°F) to +50°C (122°F)
	Humidity	0% to 90% (non-condensing)
	Stable image temperature	0°C (32°F) to +50°C (122°F)
	Storage temperature	-20°C (-4°F) to +60°C (140°F)

General Electrical	Alarm Input	General purpose opto-coupled	
	Alarm Output	General purpose opto-coupled (except -A models)	
	Power Over Ethernet	PoE 802.3af, Class 2	
	Auxiliary Power	12-48V DC, 24V AC	
	Max Power Consumption	AV1245PM	0.0 Watts DC Power
		AV2245PM	5.9 Watts DC Power
		AV3245PM / AV5245PM	6.3 Watts DC Power
AV2246PM / AV3246PM		6.8 Watts DC Power	
AV5245PM-01	5.7 Watts DC Power		

Audio Electrical (-A models only)	Streaming	Two-way
	Compression	G.711 PCM 8 kHz
	Input/Output	Integrated microphone / line output

Mechanical	Casing	-B	Plastic surface/in-ceiling dome with Acrylic bubble
	-D	Plastic surface/in-ceiling dome with Acrylic bubble	
Gimbal	Easy 3-axis camera adjustment with 360° pan, 90° tilt and 360° z-axis		
Dimensions	-B	Ø 0" (0.0mm) x 0.0" H (0.0mm)	
	-D (in-ceiling)	Ø 5.1" (130mm) x 1.74" H (44mm)	
	-D (surface mount w/ bubble)	Ø 5.1" (130mm) x 3.85" H (98mm)	
		Camera Unit	Packaged
Weight	-B	0.0lbs (0.0kg)	0.0lbs (0.0kg)
	-D	1.2lbs (0.54kg)	1.9lbs (0.86kg)
Dome Color	-LG	Light Gray Dome	

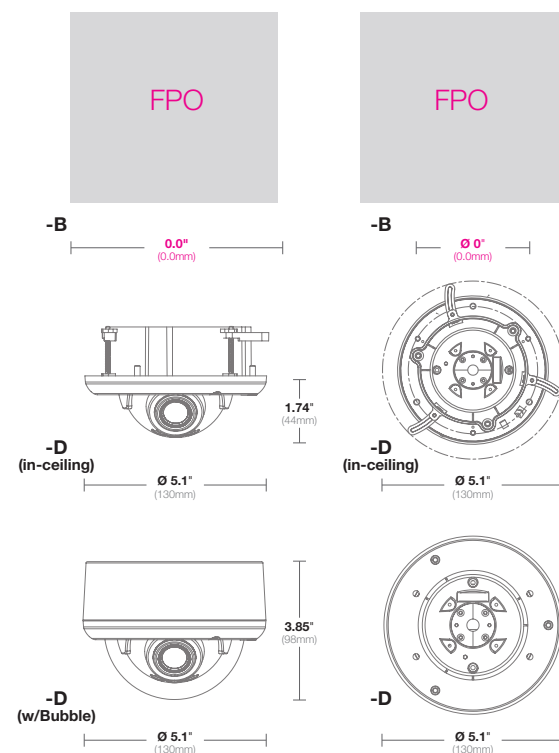

Accessories	D4S-CMT-B	Black ceiling mount with 3/4" NPT standard
	D4S-CMT	Light Gray Ceiling mount with 3/4" NPT standard
	SV-EBA	Light Gray Electrical box adapter
	SV-JBA	Light Gray Junction box adapter