

**CC-300VR/A
CC-600VR/A**

**Indoor vandal-resistant
cornice-mount camera**

- Unique, miniature housing designed for installation where the ceiling meets the wall
- Superb picture quality
- White, powder-coated, 1.2 mm, steel housing
- Easily replaceable, toughened 4 mm thick polycarbonate viewing window
- Camera module mounted on manually adjustable miniature 'swivel and tilt' cradle, for exact camera positioning
- Cables feed directly into wall or ceiling so cannot be tampered with
- Comes with free power supply unit




→ **Technical data**

	CC-300VR/A	CC-600VR/A
Video		
Image sensor	1/3" CCD sensor, 512 (H) x 582 (V) pixels	1/4" CCD sensor, 500 (H) x 582 (V) pixels
Horizontal resolution	380 TV lines or greater	330 TV lines or greater
Lens options	4 mm; 2.5 mm; 6.0 mm; 8.0 mm; 12 mm	4 mm; 2.3 mm; 5.6 mm; 8.0 mm; 16 mm
Electronic shutter	Automatic linear shutter	Automatic linear shutter
Sensitivity	0.3 lux	2.5 lux
Video output	CCIR, 1 Vp-p, 75 Ohms	PAL, 1 Vp-p, 75 Ohms
Supply voltage	12 V dc ± 10%	12 V dc ± 10%
Working temperature	-18°C to +60°C	-5° C to +40° C
Dimensions	69 x 143 x 96 mm	69 x 143 x 96 mm
Weight	600 g	600 g
Audio		
Microphone	Onmi-directional electret	Onmi-directional electret
Audio output	1 Vp-p, 600 Ohms	1 Vp-p, 600 Ohms
Audio bandwidth	100 Hz - 10 KHz, +/- 3 dB	100 Hz - 10 KHz, +/- 3 dB

CC-300VRA & CC-600VRA

→ Dimensions

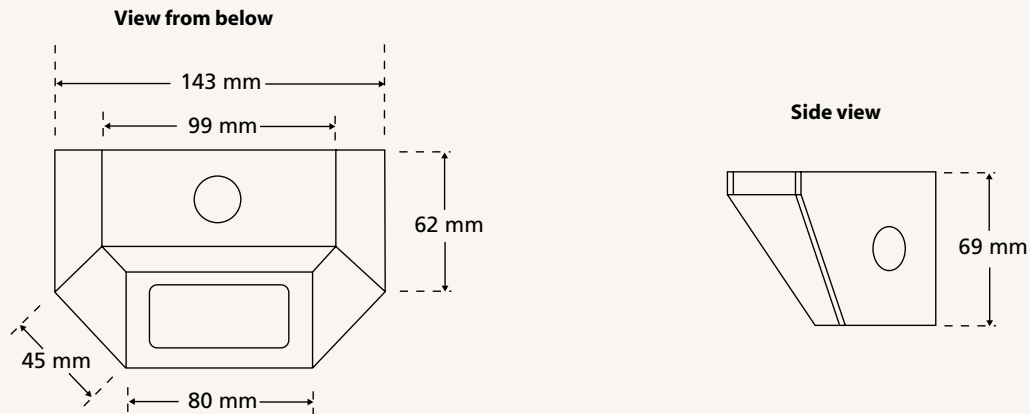

→ How to order

CC-300VR/A	Indoor vandal-resistant monochrome cornice-mount camera, 4 mm lens
CC-300VR/A/2.5	As CC-300VR/A, but with 2.5 mm lens
CC-300VR/A/6.0	As CC-300VR/A, but with 6.0 mm lens
CC-300VR/A/8.0	As CC-300VR/A, but with 8.0 mm lens
CC-300VR/A/12.0	As CC-300VR/A, but with 12.0 mm lens
CC-600VR/A	Indoor vandal-resistant colour cornice-mount camera, 4 mm lens
CC-600VR/A/2.3	As CC-600VR/A, but with 2.3 mm lens
CC-600VR/A/5.6	As CC-600VR/A, but with 5.6 mm lens
CC-600VR/A/8.0	As CC-600VR/A, but with 8.0 mm lens
CC-600VR/A/16.0	As CC-600VR/A, but with 16.0 mm lens
VR-WGR	Smoked viewing window
VR-TRK	Tamper-proof upgrade kit

Interlogix UK Limited

Unit 5, Ashton Gate,
Ashton Road, Harold Hill,
Romford, Essex RM3 8UF
Tel. 01708-381496
Fax 01708-381371

www.aritech.com

Interlogix Ireland Limited

Taurus Business Centre
Greenhills Road
Tallaght, Dublin 24
Tel. 01-459.97.60
Fax 01-452.74.48

Interlogix Europe & Africa

Headquarters
Excelsiorlaan 28
B-1930 Zaventem
Tel. 02-725 11 20
Fax 02-721 40 47

Sales Offices: Austria, Baltic States, Belgium, Czech Republic, Denmark, Eastern Europe, France, Germany, Greece, Hungary, Ireland, Italy, Netherlands, Norway, Poland, Portugal, Slovak Republic, South Africa, Spain, Sweden, U.K.

LFCC-300/600VRA 03 Rev.1 0701/UK

Aritech reserves the right to change specifications without notice.
Aritech is a trademark of Interlogix B.V.