

Application:

Sash lock for Smartair. Hardened steel hookbolt thrown 23.5mm by 90° turn of key or thumbturn. Latchbolt locks automatically when door is closed.

Specification:

Sash lock for Smartair



Hardened steel hookbolt thrown 23.5mm by 90° turn of key or thumbturn. Latchbolt deadlocks automatically when door is closed.

Suitable for variations L5S, L8V, L3, V.

Latchbolt is reversible without opening lockcase. Available with 35mm, 50mm or 70mm backset.

Finish:

The 340 has been tested to EN 12209 as shown.

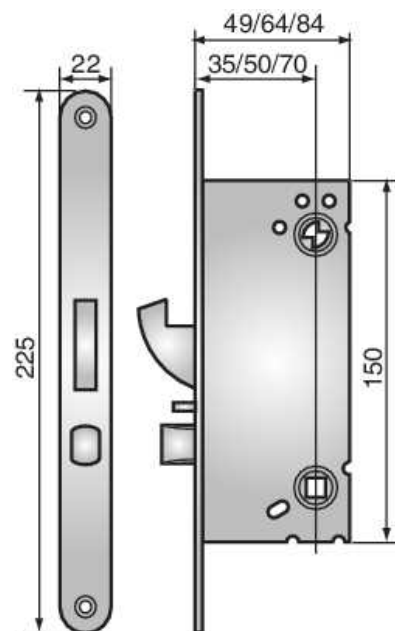

Variants:

Code	Description
LS36048816357	CONNECT 340/50 *SMARTAIR ONLY* WITH STK
LS36175316357	CONNECT 340/70 *SMARTAIR ONLY* WITH STK
36048816357	CONNECT 340/50 *SMARTAIR ONLY* (NO STK)
36175216357	CONNECT 340/35 *SMARTAIR ONLY* (NO STK)
36175316357	CONNECT 340/70 *SMARTAIR ONLY* (NO STK)
DC340A+DA SS	DRCLSR R&P ADJ 2-6 BC WITH DELAYED ACTION SS
DC340TE	DC340TE R&P CLOSER SIZE 2-6 G460 EL/MECH H/O RAIL