

Offline Classic IP Rated Scan Door Escutcheon (Spindle kits not Inc)

Application:

Ideal for Transit, Office or meeting room doors (Specific model for panic exit doors & special kits for glass doors available)

Specification:

Door profiles - Scandinavian, suitable for wooden, narrow or glass doors

Verticals - All industries, Special antibacterial surface for healthcare applications

Traffic Volume - Medium to high

Exterior usage - Yes (IP55), Up to 85% humidity without condensation, Temperature outside (-20°C and +70°C), inside (0°C and 50°C)

Hardware compatibility and installation - High retrofit (compatible with most mortise locks), Drilling, no cabling

Power Supply - Battery (up to 70.000 Cyclesmax. 3 years standby)

System Management - Offline




Standards:

CE, EN1634 (Fire), DIN 18273

Finish:

Stainless Steel

Technical Design:

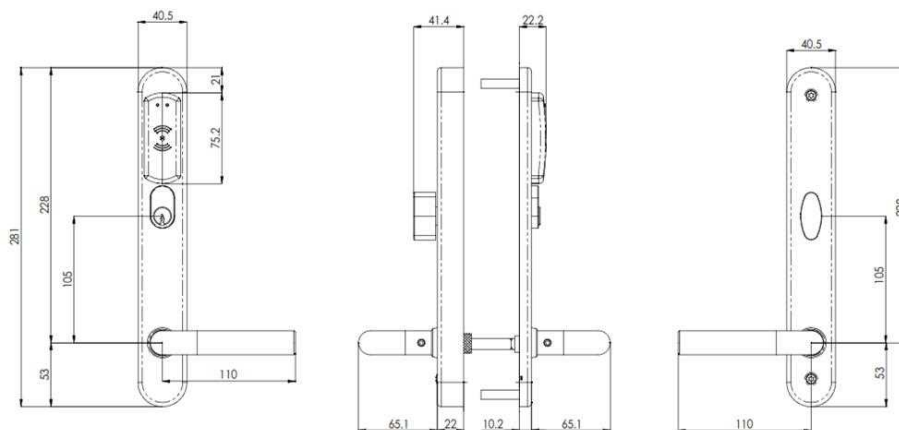

Offline Classic IP Rated Scan Door Escutcheon (Spindle kits not Inc)

Variants:

Code	Description
10428800131	SA L1S SCAN O/L - UOC MF D/E (IP55) :SNCC52XL1S058SI
10428900131	SA L2V SCAN O/L - UOC MF D/E (IP55) :SNCC52XL2V058SI
10429100131	SA L5S SCAN O/L - UOC MF DE (IP55) :SNCC52XL5S058SI
10429200131	SA L8V SCAN O/L - UOC MF D/E (IP55) :SNCC52XL8V058SI