

Application:

Ideal for Transit, Office or meeting room doors (Specific model for panic exit doors & special kits for glass doors available)

Specification:

Door profiles - Scandinavian, suitable for wooden, narrow or glass doors

Verticals - All industries, Special antibacterial surface for healthcare applications

Traffic Volume - Medium to high

Exterior usage - Yes (IP55), Up to 85% humidity without condensation, Temperature outside (-20°C and +70°C), inside (0°C and 50°C)

Hardware compatibility and installation - High retrofit (compatible with most mortise locks), Drilling, no cabling

Power Supply - Battery (up to 70.000 Cyclesmax. 3 years standby)

System Management - Wireless




Standards:

Finish:

CE, EN1634 (Fire), DIN 18273

Stainless Steel

Technical Design:

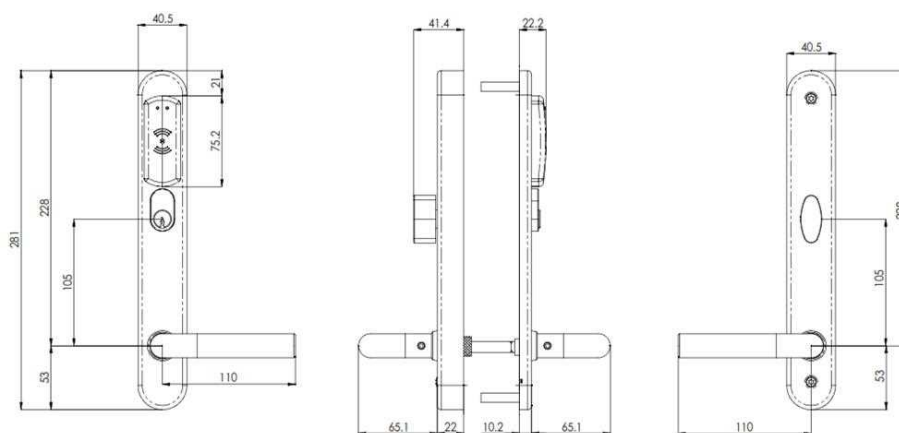

Variants:

Code	Description
10461900031	SA L1S SCAN W/L MF D/E :SNWC52SL1S058SI
10462000031	SA L2V SCAN W/L MF D/E :SNWC52SL2V058SI
10462200031	SA L5S SCAN W/L MF D/E :SNWC52SL5S058SI
10462300031	SA L8V SCAN W/L MF D/E :SNWC52SL8V058SI