


[Datasheet](#)[SYS-4ENT-DVE1](#)[Alta Access](#)

Avigilon 4-Door Smart Hub

Expandable access control for the modern workplace

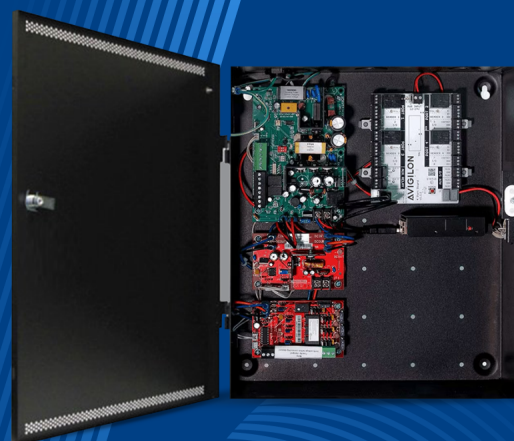

Smart Hubs are shipped unassembled.

Seamlessly expand your access control with our modular Core Series Smart Hub that features configurable inputs, encryption at every level and powerful, cloud-based management to enable secure, dynamic access control for any facility. The Smart Hub connects to expansion boards that include ports for Avigilon Smart Readers, Request to Exit (REX) inputs, and Contact Sensors. It uses RS-485 wiring to connect to the Smart Readers and is powered by a built-in 12/24VDC power supply.



CloudSync offline functionality

CloudSync is our offline-first technology, which allows the system to operate even if your internet connection goes down.



Easy management with smart monitoring

Network and device monitoring systems built in to ensure a smooth experience for our users, with remote diagnostic and troubleshooting capabilities to resolve any issues with ease.



Hassle-free installation

Plug-and-play design allows for easy expansion, customization and mounting, with interoperability to integrate with physical on-premise systems and logical software-based systems.



Premium hardware for best performance

The Smart Hub features a future-proof Access Control Core that securely makes all entry decisions. It features a 12/24VDC power supply and expansion boards.



100% remote cloud management


Do more with less by securely and easily connecting to the cloud for remote system management, diagnostics, and communication.



Lifetime limited warranty

Avigilon's access control hardware is backed by a limited lifetime warranty, helping ensure lasting quality.

Specifications

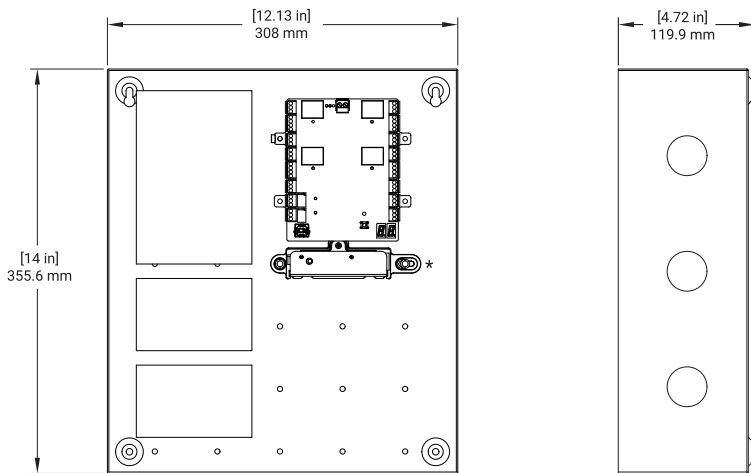SYSTEM	
Access Control	Up to 4 Avigilon Smart Readers
Door Relays	4 relays, 5A @ 24VDC (resistive)
Auxiliary Relays	2 relays, 1A @ 24VDC 2 auxiliary relays and 4 configurable auxiliary I/O pins provide extra inputs and outputs, and allow additional sensors or Wiegand devices
Avigilon Readers	Up to 4 Avigilon Smart Readers Uses industry standard RS-485 signaling to communicate with Avigilon readers over standard wiring
Communication Ports	10/100/1000 baseT Ethernet; USB port TLS 1.2+ encryption between Access Control Core and access control cloud service
REX and Contact Sensors	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary I/O	4 input/output lines with EOL monitoring
Power Supply	FPV4: 24V @ 3A @ or 12V @ 4A
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series (not included)
MECHANICAL	
Dimensions	 Technical drawing of the LifeSafety Power E1 enclosure. The front view shows a rectangular unit with a width of 12.13 in (308 mm) and a height of 14 in (355.6 mm). It features a central panel with various ports and a bottom section with three circular indicators. The side view shows a depth of 4.72 in (119.9 mm) and three circular cutouts. A note indicates that the use of a mounting bracket is recommended. *Use of mounting bracket is recommended.
Weight	Approx. 10 lbs (4.5 kg)
Power Supply	LifeSafety Power® E1 enclosure pre-installed with 24V FPV4 Power Supply, C4 Relay Based Lock Control Module, and B100 Secondary Voltage Module
Wiring	Uses RS-485 wiring to connect to the Avigilon Smart Readers EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors



ELECTRICAL	
Input Voltage	120VAC, 208/230VAC with cuttable jumper
Input Current	1.8Amp max.
Operating Voltage	12VDC and 24VDC
Operating Current	2.2A @ 12V with 4 Avigilon Smart Readers 1.2A @ 24V with 4 Avigilon Smart Readers
Current for Locking Hardware	12V-only system: 1.8A 24V-only system: 1.8A 12V and 24V system: Varies based on configuration; recommend to run off 24V as primary voltage
ENVIRONMENTAL	
Operating Temperature	0°C to 50°C (32°F to 122°F)
Operating Humidity	5% to 85% relative, non-condensing
REGULATORY	
Certifications	CE (Europe), IC (Canada), FCC (United States), NOM (Mexico), RoHS, UKCA (United Kingdom), UL 294*, CAN/ULC 60839-11-1 *Performance Levels: Attack Level I, Endurance Level I, Line Security Level I, Standby Power Level I
WARRANTY	
Avigilon Alta Access Warranty	Lifetime limited; for more information, visit avigilon.com/support/warranty



Ordering information

PART NUMBER	DESCRIPTION
SYS-4ENT-DVE1	Avigilon 12-24V 4-Door Smart Hub - E1 Enclosure Shipped separately: Avigilon Access Control Core (OP-CR-ACC), Avigilon 4-Port Expansion Board (OP-EX-4E)

Support

For product support, visit: [avigilon.com](https://www.avigilon.com) or sales@avigilon.com

To learn more, visit:
[avigilon.com/access-control/12-24v-4-door-core-series-smart-hub](https://www.avigilon.com/access-control/12-24v-4-door-core-series-smart-hub)



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. [motorolasolutions.com](https://www.motorolasolutions.com)

© 2025, Avigilon Corporation. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

20251211-en