


AXIS Fixed Wireless Housing

Part Number 29892

The AXIS Fixed Wireless Housing is an outdoor, environmental enclosure designed to provide protection for the AXIS 211W Network Camera in both hot and cold climates. The housing is designed to meet the IP65 standard of protection.

The body is constructed of an attractive white finished aluminum with black end caps, an integrated sunshield and a 7 dbi gain WiFi antenna with a low loss cable attachment to maximize the wireless capabilities of the AXIS 211W Network Camera.

The housing ships with a 24 VAC heater and blower that enables the Axis network camera to operate in temperatures from -20° F to $+120^{\circ}$ F.

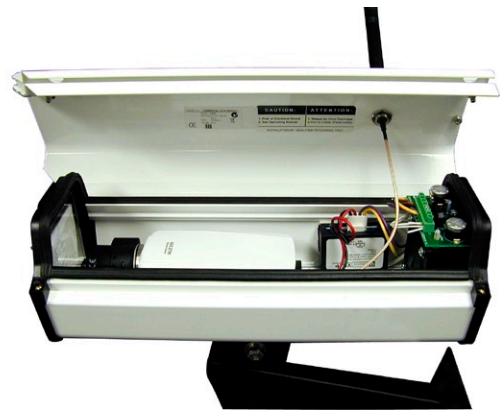

- Designed to offer IP65 protection
- 24 VAC heater/blower, sunshield
- 7 dbi omni-directional antenna
- Side hinge for easy access when servicing

AXIS Fixed Wireless Housing

Technical Data – Housing

General

- Made of aluminum
- White finish with black end caps
- Two watertight strain relief valves for network and power cables
- For use with AXIS 211W Network Camera

Electrical

- 24 VAC, 50/60 Hz
- Heater: 24 VAC, 25 vA, 1.04 Amps
- Blower: 24 VAC, input (RECTIFIED), 1.4 vA
- 24 VAC to 12 VDC transformer, 1.0 Amp

Dimensions and Weight

Product measurements

- Weight: 9 lbs
- Dimensions (H x W x D): 18.3" x 5.7" x 4.5"

Shipping measurements

- Weight: 10 lbs
- Dimensions (H x W x D): 17 x11 x 7

Operating Conditions

- Indoor/outdoor
- Designed to offer IP65 protection (with cable glands)
- Operating temperature -20 F to +120 F

Approvals

- CE
- UL Listed

Ships With

- Integrated sunshield
- Heater and blower
- 7 dbi, omni-directional antenna
- Wall mount
- 120 VAC – 24 VAC wall transformer

www.axis.com