

VT Vandal-Resistant Housing AVTPSC

Vandal-resistant indoor housing for Axis Network Cameras

VT Vandal-Resistant Housing AVTPSC has been designed for surveillance applications in premises highly exposed to vandalism (underground parking lots, subway stations, prisons, police stations, corridors, supermarkets etc).

The housing is made of sheet steel (1.5 mm thick), painted with epoxypolyester powder and the front window is made of PMMA glass (4 mm thick). The housing is equipped with an internal bracket for camera attachment and adjustment and the compass opening allows for easy installation and maintenance. The cable outlet is made possible from the fixing base, from both sides (left or right) and from the 2 M20 cable glands on the rear.

Optionally, VT Vandal-Resistant Housing AVTPSC can be equipped with a heater. Supported cameras are AXIS 210, AXIS 210A, AXIS 211A, AXIS 211A, and AXIS 221 Day & Night.




- Indoor installation
- Sheet steel construction
- Epoxypolyester painted
- Key lock



VT Vandal-Resistant Housing AVTPSC

| Specifications Specification Specificatio | | | | |
|--|---|--|-------------------------------|---|
| Supported products | *AXIS 210, AXIS 210A, AXIS 211, AXIS 211A, AXIS 221 | | Operating conditions | Temperature: up to + 50 °C (-4 °F to 122 °F) Temperature with heater: -20 °C |
| Casing | Made of sheet steel, 1.5 mm thick (0.06") Epoxypolyester powder painted RAL9002 PMMA glass 4 mm (0.15") thick Compass opening | | Accessories (not included) | Heater OAVTPSCH1 - Power: in 12 V DC/24 V AC, 20 W, - Operating conditions: on 15 °C +/- 3 °C (59 °F), off 22 °C +/-3 °C (71°F) |
| Power | Camera power supply: OAVTPSCPS1: In 100 – 240 V AC, 50/60 Hz Out 12 V DC, 1 A max | | Approvals | CE according to EN61000-6-3, EN60065, EN50130-4 IK8 |
| | | | Dimensions (HxWxD) and weight | 178 x 354.5 x 155 mm (window dimensions: 117 x 96 mm) Weight: 3.5 kg |

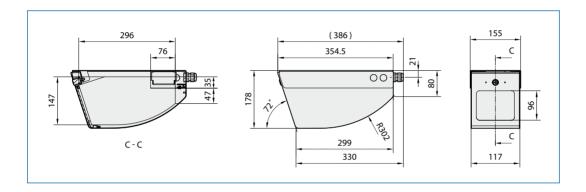

VERSO housing - accessories and order guide

To receive a fully working unit for outdoor use, please use the following guide and select one item from each column. Items in grey boxes are optional.



