



BE-KB08

3 Axis Computerized Controller



Features:

- Control Pan/Tilt, Focus, Zoom, Iris
- RS485 Control Bus, control up to 255 cameras
- LCD Menu for easy operation
- Camera function setup: set camera address, pre-sets, auto tour, auto scan, etc.
- Alarm activation and alarm export
- Connect up to 4 keyboards when work with RS485
- Control up to 1024 domes with ethernet matrix

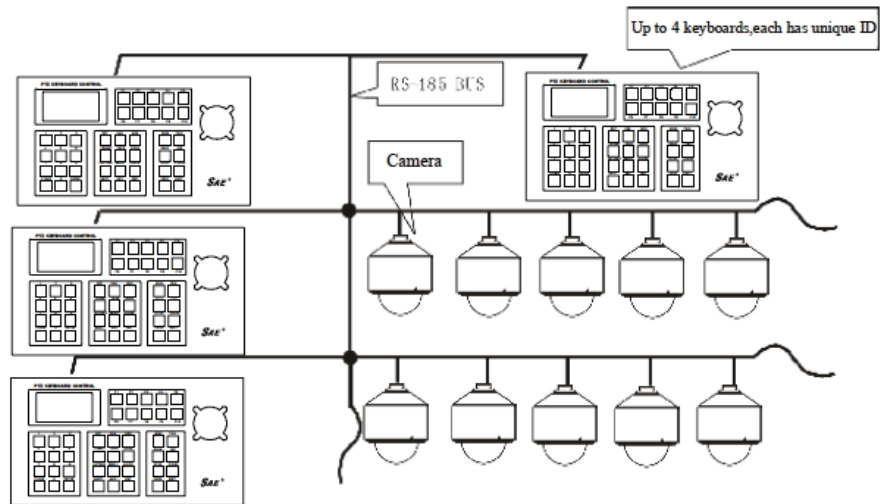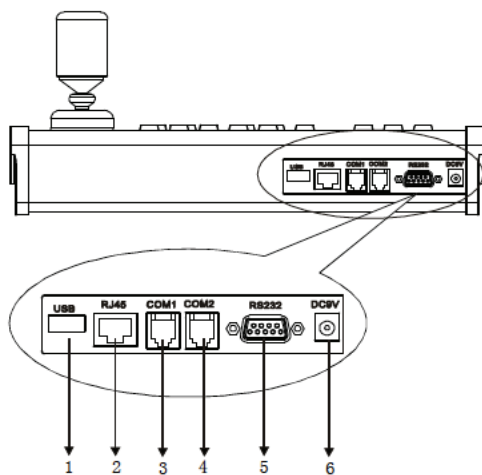

Specification:

Communication Port	Interface: RS-485, USB Ethernet Connector: RJ11, RS232, DB9 Baud Rate: 2400/4800/9600/19200bps
System Settings	One 8-bit DIP Switch
Display	128x64 Dot Matrix, 21x8 Characters
P/T/Z Control	left/right: up/down, Iris: up/down
Switch/Control	Focus: far/near, Zoom: in/out Save/Call Preset, Auto-Scan, Pattern, Tour
Joystick	Three Axis (Left, Right, Zoom)
Power Supply	DC 9V
Power Consumption	4.5W
Dimension	12" x 7.6" x 2.2"

For more information or technical support, please call (909) 305-8889 or log on to www.bolideco.com

468 South San Dimas Avenue, San Dimas CA 91773 | Tel: (909) 305-8889 Fax: (909) 305-0999

Bolide Technology Group makes no representation concerning the legality of certain product application. We encourage you to check and comply with all applicable local state, and federal laws. Specification and availability are subject to change without notice. All trademarks, registered trademarks, and names are the property of their respective owners.