

- 2MP CMOS PROCESSOR
- HIGH RESOLUTION: 1920 X 1080 pixels 1080p
- H.264 VIDEO COMPRESSION
- MULTISTREAM
- IP66 ENVIRONMENTAL PROTECTION
- SD CARD SLOT UP TO 64GB
- REMOTE MONITORING (ANDROID, IOS)



## GENERAL DESCRIPTION

The **BN5035M-HD** is a hybrid bullet camera (IP and analog) with the best characteristics for indoor and outdoor installations with IP66 environmental protection. This box camera offers high versatility on installations thanks to its 3-axis design. With up to 25mts of irradiation distance in its IR Lamps, this camera provides the best image in the day, night or in warehouse and indoor installations with low illumination.

In today's evolving industry, image quality is not enough to verify that an incident is taking place. Bolide Technology Group with its iPacHD line, pushes the envelope further than standard CCTV systems. Bolide has moved forward leading the industry by expanding into a full line of HD cameras. This new HD line brings possibilities such as video analytics, facial recognition and vehicle plate recognition into a reality. These new features allow the end user to maximize their investment by having better support and increasing efficiency. Better management functions and meeting operational requirements lead to not only a better value but a better overall security solution.

A full HD image of 1920 x 1080 is approximately four and a half times better than a standard IP camera transmitting VGA sized images.

iPacHD supports H.264 compression standard that has become the industry standard. iPacHD delivers a multi-streaming function that allows up to 3 streams that are adjustable to lower or higher resolutions to fit any investigative challenge or need. All iPac cameras include two-way audio, BNC analog port, back up SD slot and NAS compatibility with CIFS or FTP protocol. The ONVIF protocol allows for a wide variety of compatibility for integration with other systems. Finally, the ANDROID and IOS compatibility allowing for remote monitoring what makes iPacHD universally compatible and an all in one solution.

**OPTICAL INFORMATION**

<b>IMAGE SENSOR</b>	Sony Exmor 1/2.8"
<b>SIGNAL SYSTEM</b>	NTSC/PAL
<b>CAMERA TYPE</b>	Color Day/Night with ICR filter
<b>RESOLUTION</b>	1920x1080
<b>MINIMUM ILLUMINATION</b>	0.1 lux @ F1.2 (0 lux IR ON)
<b>DYNAMIC RANGE</b>	Variable 0~100
<b>WHITE BALANCE</b>	Auto/Manual
<b>AGC</b>	Auto/Fixed 8~102db
<b>BLC</b>	Auto/On-Off
<b>ELECTRONIC SHUTTER</b>	Auto/Manual 1/5-1/50,000 ; 50/60Hz
<b>OSD/CONTROL MODE</b>	Yes
<b>GAMMA</b>	0,45
<b>VIDEO OUTPUT</b>	Enthernet RJ45 / BNC out

**AUDIO**

<b>INPUT</b>	Optional Microphone: 1x RCA
<b>OUTPUT</b>	1x RCA Output @ 1v Line Level
<b>COMPRESSION</b>	G711 Alaw, G711 U-Law, RAW PCM

**LENS**

<b>LENS TYPE</b>	3.3~12mm Vari-focal IR corrected
<b>ANGLE OF VIEW</b>	79.3~29.8 degress
<b>IRIS CONTROL</b>	Auto/Manual

**IR ILLUMINATION**

<b>INFRARED WAVELENGHT</b>	25 LED's 850nm
<b>INFRARED LAMP</b>	20-25 mts.
<b>IRRADIATION DISTANCE</b>	

**ENVIRONMENTAL**

<b>OPERATING TEMPERATURE</b>	14F ~ 131F
<b>OPERATING HUMIDITY</b>	10% - 85% RH
<b>ENVIRONMENTAL PROTECTION</b>	IP66

**ELECTRICAL**

<b>INPUT VOLTAGE</b>	12V DC / PoE Class 3
<b>RECOMMENDED POWER SUPPLY</b>	DC12V± 5%

**CERTIFICATIONS**

<b>CE</b>	Yes
<b>FCC</b>	Yes
<b>RoHS Compliant</b>	Yes

**VIDEO**

<b>COMPRESSION</b>	H.264 High Profile / MJPEG
<b>FRAME RATE</b>	1920 X 1080@30fps
<b>VIDEO STREAMS</b>	3 Stream 10Kbps ~ 12Mbps, CBR, VBR
<b>MOTION DETECTION</b>	Yes
<b>MASKING</b>	3 user defined privacy masking

**INTERFACES**

<b>ALARM INPUT</b>	1 x No/NC
<b>ALARM OUTPUT</b>	1 x No/NC
<b>NETWORK INTERFACE</b>	1 CH RJ-45 10M/100M self-adaptive Ethernet

**RECORDING**

<b>RECORDING</b>	Local Micro SD Card, Remote FTP, TCP/UDP CMS, RTSP
<b>NETWORK PROTOCOLS</b>	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPoE. Unicast and Multicast supported. Video Streaming from NVMS or 3rd party Software. User Port setting for Web port, RTSP Port, and SDK Control Port and Alarm Port


**MECHANICAL**

<b>DIMENSIONS</b>	377 x 110mm
<b>WEIGHT</b>	1.65kg
<b>3 AXIS</b>	Yes
<b>VANDAL PROOF</b>	Yes

**GENERAL**

<b>USERS</b>	Multi Admin/User
<b>WEB BROWSER</b>	IE, Firefox, Chrome, Safari, Nav, Opera
<b>SECURITY</b>	IPv4/IPv6 (DHCP / Fixed)
<b>MOTION DETECTION</b>	Yes
<b>SD CARD</b>	Micro SD (max 64GB)
<b>PoE</b>	Yes
<b>COMPLIANCE</b>	Onvif v22 (Profile S) Standard RFC 2326, Support Quticktime/VLC Player.
<b>RSTP VIDEO</b>	
<b>SMARTPHONE VISUALIZATION</b>	iOS, ANDROID

### GENERAL DIMENSIONS

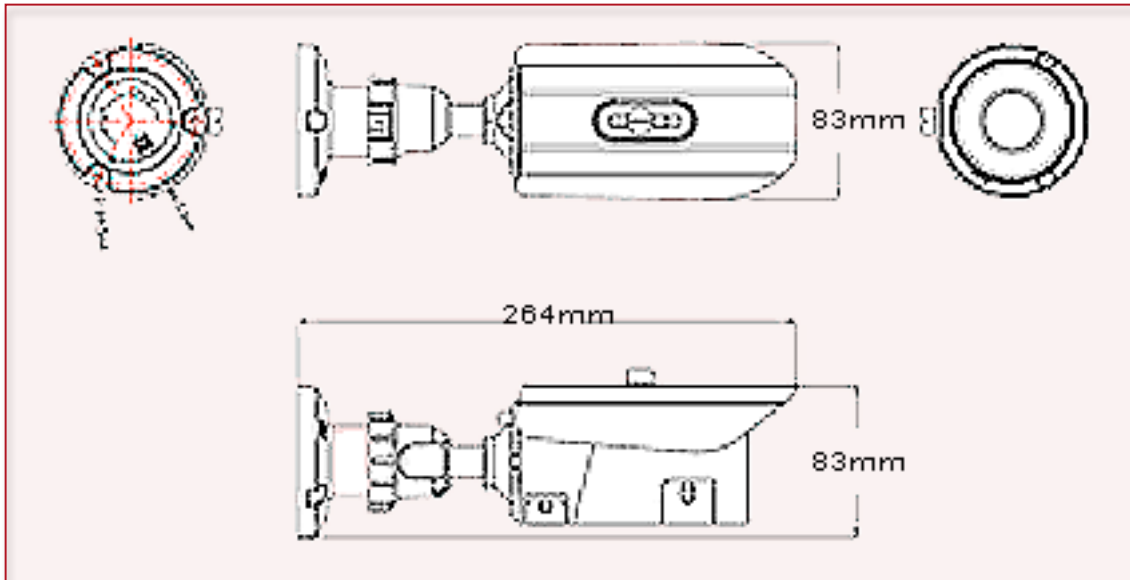

### ADVISED POWER SUPPLY

