



G3B Series BasicDome Economical Systems



- ▶ 16x optical zoom
- ▶ Integrated high performance color camera system
- ▶ High speed
- ▶ Affordable, yet feature-rich
- ▶ Easy to install
- ▶ Remotely configurable (Bilinx, Bi-Phase, RS-232, RS-485)
- ▶ Sector and preset titling
- ▶ Patented AutoPivot and Auto Scaling
- ▶ Three-year warranty

The BasicDome camera is the economical high speed camera solution for indoor security applications. It offers a faster, a quieter and a smoother operation than ever before in a dome in this price range. The BasicDome is the perfect choice for those who want the assurance of the Bosch name, at an affordable price.

Functions

The BasicDome is designed to save you time as well as money. The same camera assembly easily locks into either the pendant mount or the in-ceiling box.

It includes an on-screen display for remote programming, so you can set it up correctly the first time, and easily optimize the camera under changing conditions. Even the BasicDome address is set remotely using Bosch FastAddress.


A rugged motor with fewer moving parts allows the BasicDome to use less power and to be extremely reliable, making it ideal for high-usage applications.

As with all AutoDome systems, the BasicDome includes our patented AutoPivot feature that automatically rotates and flips the camera, so tracking a subject under the dome is effortless. The BasicDome's design, flexibility, and versatility make this feature-rich camera an affordable and valuable addition to any security system.

Remote control, configuration, and updates can be performed over the video cable (coax or passive UTP) when using Bilinx-compatible control and configuration devices (such as the VP-CFGSFT configuration tool or LTC 8016 Allegiant Bilinx Interface).

The menu for these devices can display multiple languages, including: English, French, German, Spanish, Portuguese and Polish.

Installation/Configuration Notes

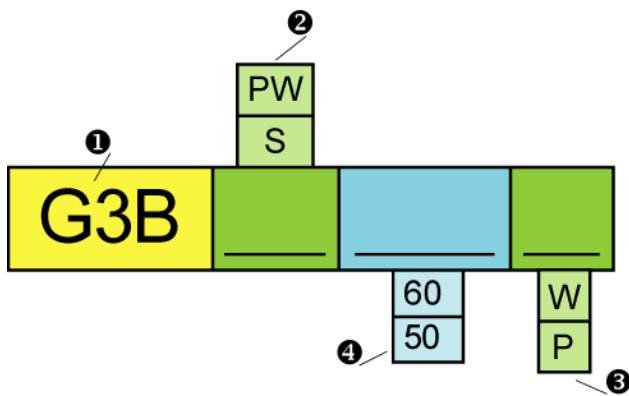

- | | |
|---|---|
| 1 AutoDome | 3 W-Wall ¹
P-Pipe ¹ |
| 2 PW-Pendant White
S-Suspended Ceiling | 4 60-24 VAC, 60 Hz NTSC
50-24 VAC, 50 Hz PAL |

1. Wall and pipe mount kits apply only to pendant models.

Technical Specifications

Electrical

Color Camera

Imager	Interline transfer CCD 1/4 in. image format
--------	--

Active Pixels

PAL Model (H x V)	752 x 582
-------------------	-----------

NTSC Model (H x V)	768 x 494
--------------------	-----------

Lens	16x zoom (4.1-65.6 mm) F1:1.4 to F1:3.0
------	--

Focus	Automatic with manual override
-------	--------------------------------

Iris	Automatic with manual override
------	--------------------------------

Field of View	2.7° to 48°
---------------	-------------

Video Output	1.0 Vp-p, 75 Ohm
--------------	------------------

Gain	Off / auto
------	------------

Synchronization	Line-Lock (-120° to 120° vertical phase adjust) or internal crystal
-----------------	---

Aperture Correction	Horizontal and vertical
---------------------	-------------------------

Digital Zoom	Not applicable
--------------	----------------

Horizontal Resolution

NTSC Model	470 TVL
------------	---------

PAL Model	460 TVL
-----------	---------

Sensitivity

Sensitivity (Minimum Usable Video: 20 IRE)	0.5 lux (0.05 fc)
--	-------------------

Sensitivity (Usable Video: 50 IRE)	0.8 lux (0.08 fc)
------------------------------------	-------------------

Signal-To-Noise Ratio	>50 dB
-----------------------	--------

White Balance	2000 K to 10,000 K
---------------	--------------------

Environmental

Design Rating	IP 31 (NEMA 2)
---------------	----------------

Operating Humidity	0%-90% non-condensing
--------------------	-----------------------

Operating Temperature	-10°C to 50°C (14°F to 122°F)
-----------------------	-------------------------------

Storage Temperature	-40°C to 60°C (-40°F to 140°F)
---------------------	--------------------------------

Incompatibility Statement

Bosch BasicDomes use the remote addressing feature, FastAddress, exclusively. There is no manual way to set the address using switches. Because of this, these domes are not compatible with Bosch systems that meet the following criteria:

Fixed Speed Keyboards

- LTC 8500/LTC 8600/LTC 8800 CPUs version 5.2 or older.
- Any LTC 8500/LTC 8600/LTC 8800 CPUs without two (2) 8-position dip switches.
- Any LTC 8600/LTC 8800 sold before 6/94 and LTC 8500 sold before 5/95.

Older LTC 8500/LTC 8600/LTC 8800 systems can be upgraded by replacement of CPU with current version. Changes to other system accessories may also be necessary when upgrading to variable speed (for example, keyboards, receiver/drivers, port expanders, etc.).

Mechanical

Weight	1.7 kg (3.7 lb)
Pan/Tilt	360° continuous, 0° to 90° tilt
Pre-position Speed	360°/sec., ±0.5° accuracy
Variable Speed	120°/sec.
Power Consumption	15 W
Miscellaneous	
Camera Setup Control	Bi-Phase or RS-232
Pre-Positions	99, each with 16-character titles
Guard Tour	<ul style="list-style-type: none"> Recorded tours - two (2), with a total duration of 15 minutes. All camera functions stored in memory.
Addressing	FastAddress remote addressing
Sectors/Titling	16 independent sectors with 16-character titles/sector.

Ordering Information

G3B51C BasicDome Color Camera Module 16x color, PAL, indoor drop ceiling, tinted dome, 24 VAC, 50 Hz	899380054771
G3B61 BasicDome Color Camera Module 16x color, NTSC, indoor drop ceiling, color, tinted dome, 24 VAC, 60 Hz	899380054781
G3BS BasicDome Backbox indoor drop ceiling kit	899380040191
G3BS50 BasicDome Color Kit 16x color, PAL, indoor drop ceiling, tinted dome, 24 VAC, 50 Hz	899380040071
G3BPW BasicDome Backbox pendant, white	899380040211
G3BPW50W BasicDome Color Kit 16x color, PAL, indoor pendant, wall mount, tinted dome, white, 24 VAC, 50 Hz	899380040081
G3BPW50P BasicDome Color Kit 16x color, PAL, indoor pendant, pipe mount, tinted dome, white, 24 VAC, 50 Hz	899380040101
G3BPW60W BasicDome Color Kit 16x color, NTSC, indoor pendant, wall mount, tinted dome, white, 24 VAC, 60 Hz	899380040131
G3BPW60P BasicDome Color Kit 16x color, NTSC, indoor pendant, pipe mount, tinted dome, white, 24 VAC, 60 Hz	899380040151
G3B BasicDome Dummy Kit dome and trim ring only	899380045091
Hardware Accessories	
TC 220PSX-24 Power Supply Unit 230 VAC/20 VAC, 50 Hz, 20 VA	899380014991

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 27 83955
Fax: +31 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by