



REG-L1 License Plate Cameras



- ▶ High speed capture to 160 km/h (100 mph)
- ▶ 24/7 Capture in day and dark conditions
- ▶ Advanced Ambient Rejection Technology
- ▶ Energy efficient operation at 12 to 24 VAC/VDC
- ▶ Compact housing, installer friendly design

REG-L1 integrates advances in optics, electronics, IR illumination and Ambient Rejection Technology to deliver consistent, reliable number plate capture in the most challenging of conditions

With an operational range of up to 30 m (100 ft) or 25 m (80 ft) depending on number plate size, REG-L1 delivers high contrast number plate images across the complete spectrum of ambient lighting conditions, from total darkness to direct glare from sunlight and vehicle headlights. The camera can capture clear plate images from vehicles moving at speeds of up to 160 km/h (100 mph) enabling effective capture on motorways, highways and in other high speed applications.

The unit housing is weather-sealed and field proven for successful application in extreme environments. REG-L1's LED array eliminates the need for routine bulb changes. An improved electronic design allows for energy efficient operation at 12 to 24 VAC/VDC

REG-L1 is designed to work with NVRs or with DVRs. It is specifically designed to work with third party ANPR software.

Functions


Applications

- ANPR

- Traffic monitoring
- Border control
- Access control
- Car parking
- Policing
- Post event investigation
- 12 V to 24 VAC/VDC operation

Installation/Configuration Notes

Ordering chart

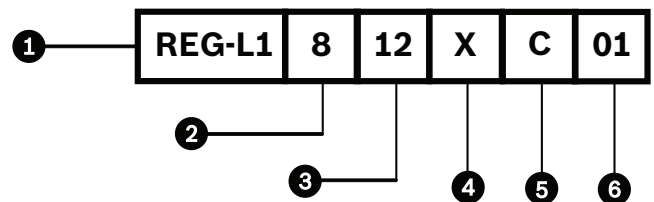

1. Model	REG-L1	
2. Wavelength	8	850 nm
3. Lens	12	12 mm
	16	16 mm
	25	25 mm
	35	35 mm
	75	75 mm

1. Model	REG-L1	
4. Camera Type	X	Standard
5. Region	C	CCIR
	E	EIA
6. Color	01	Black

Technical Specifications

Operational Range	Up to 30 m (100 ft) or 25 m (80 ft) depending on number plate size
Camera Sensors	LXR CCD
Resolution	520 TVL
IR Illumination	LED array, 850 nm
Life	Greater than 5 years
Input	12 to 24 VAC/VDC
Consumption	30 W
Temperature Range	-50 °C to +50 °C (-58 °F to +122 °F)
Construction	Robust, weather sealed aluminum casting and extrusion
Environmental	Sunshield
Dimensions	250 x 154 x 165 mm (9.8 x 6.1 x 6.5 in)
Weight	2.8 kg (6.2 lb)
Color	Supplied in black(RAL B401)

Camera Selection Tables

Range for 12 x 6 in (305 x 152 mm) number plates (common in North America)

Model	Range	Optimal Distance
REG-L1-816	4 to 7 m (12 to 22 ft)	5 m (16 ft)
REG-L1-825	6 to 10 m (20 to 34 ft)	8 m (25 ft)
REG-L1-835	8 to 15 m (27 to 48 ft)	11 m (35 ft)
REG-L1-850	12 to 21 m (40 to 68 ft)	15 m (50 ft)
REG-L1-875	17 to 24 m (55 to 80 ft)	23 m (75 ft)

Range for 520 x 111 mm (20.5 x 4.4 in) number plates (common in Europe)

Model	Range	Optimal Distance
REG-L1-812	3 to 6 m (10 to 20 ft)	5 m (16 ft)
REG-L1-816	5 to 8 m (16 to 26 ft)	7 m (23 ft)
REG-L1-825	7 to 12 m (23 to 40 ft)	10 m (33 ft)
REG-L1-835	11 to 18 m (34 to 60 ft)	15 m (50 ft)
REG-L1-850	17 to 25 m (56 to 82 ft)	22 m (72 ft)
REG-L1-875	22 to 30 m (72 to 100 ft)	28 m (92 ft)

Ordering Information

REG-L1-812XC-01 License Plate Camera License Plate Reader with LED, 12 mm lens, SX8 camera, CCIR, 3 to 6 m (10 to 20 ft), psu separate	REG-L1-812XC-01
REG-L1-816XE-01 License Plate Camera License plate reader with LED, 16 mm lens, SX8 camera, EIA, 12 to 22 ft, psu separate	REG-L1-816XE-01
REG-L1-816XC-01 License Plate Camera License plate reader with LED, 16 mm lens, SX8 camera, CCIR, 5 to 8 m (16 to 26 ft), psu separate	REG-L1-816XC-01
REG-L1-825XE-01 License Plate Camera License plate reader with LED, 25 mm lens, SX8 camera, EIA, 20 to 34 ft, psu separate	REG-L1-825XE-01
REG-L1-825XC-01 License Plate Camera License plate reader with LED, 25 mm lens, SX8 camera, CCIR, 7 to 12 m (23 to 40 ft), psu separate	REG-L1-825XC-01
REG-L1-835XE-01 License Plate Camera License plate reader with LED, 35 mm lens, SX8 camera, EIA, 27 to 48 ft, psu separate	REG-L1-835XE-01
REG-L1-835XC-01 License Plate Camera License plate reader with LED, 35 mm lens, SX8 camera, CCIR, 11 to 18 m (36 to 59 ft), psu separate	REG-L1-835XC-01
REG-L1-850XE-01 License Plate Camera License plate reader with LED, 50 mm lens, SX8 camera, EIA, 40 to 68 ft, psu separate	REG-L1-850XE-01
REG-L1-850XC-01 License Plate Camera License plate reader with LED, 50 mm lens, SX8 camera, CCIR, 17 to 25 m (55 to 82 ft), psu separate	REG-L1-850XC-01

Accessories

EXMB.017B Wall Mount Adapter Bracket Wall Mount Adapter, Black	EXMB.017B
EXMB.028B Cable Managed Wall Bracket Cable-managed arm bracket, black	EXMB.028B
EXMB.015B Pole Mount Adapter Bracket Pole Mount Adapter, black	EXMB.015B
EXMB.061 Pole Top Bracket Stainless Pole Top Bracket	EXMB.061
EXMB.029B Ceiling Mount Bracket Ceiling Mount Bracket, Black	EXMB.029B
UPA-2450-60 Power Supply 120 VAC, 60 Hz, 24 VAC, 50 VA Out	UPA-2450-60
UPA-2450-50 Power Supply 220 VAC, 50 Hz, 24 VAC, 50 VA Out	UPA-2450-50

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com