

# VIDEOJET XTC XF Video Transcoder

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Dynamic Transcoding for live view and advanced remote replay
- ▶ Enables HD video over bandwidth-limited links
- ▶ Bandwidth-friendly Adaptive Bit Rate (ABR) encoding
- ▶ Instant Display Enhancement during pause mode
- ▶ Local recording on CF card for up to four HD cameras

VIDEOJET XTC XF enables HD video up to 1080p30 or 720p60 to be seen over wide area networks or through mobile access in original quality.

Its Dynamic Transcoding functionality makes it the ideal entrance door for central monitoring systems to remote HD camera sites, or for remote clients to small business HD video surveillance installations. Even megapixel cameras can be connected if they provide a video stream with a resolution downscaled to HD.

Its transcoding services seamlessly integrate with VRM Video Recording Manager installations, enabling for example mobile access for on-site guards to HD video, both live and playback.

VIDEOJET XTC XF provides two independent transcoded streams, enabling live viewing access to two HD cameras or playback of their recordings simultaneously, regardless of the network bandwidth. The Bosch Video Security app for iOS devices like Apple iPad provides an advanced but intuitive tool to fully utilize the VIDEOJET XTC XF transcoder's features.

The Bosch Video Security app as well as the Web browser playback interface allow forensic search in the recordings of IVA-enabled HD cameras, providing quick results for highly efficient digging into relevant situations. Having found an event or a point of

interest, pausing the replay causes the Instant Display Enhancement feature to present the HD image in its original recording quality.

VIDEOJET XTC XF is built into a housing that can be easily rack- or wall-mounted.

These powerful and flexible devices represent the cutting edge of high-performance Video-over-IP for HD CCTV today.

## Functions

### Flexibility

VIDEOJET XTC XF transcoders offer local recording for up to four connected HD cameras on CompactFlash. The built-in iSCSI support enables the VIDEOJET XTC XF transcoders to act as conventional DVRs while providing transcoded HD video across any bandwidth-type of network.

### Viewing

VIDEOJET XTC XF transcoders video can be displayed on the Bosch Video Security app, on a PC using a Web browser, in the Bosch Video Management System, or integrate it into another video management system. Adaptive Bit Rate encoding enables viewing from remote sites over bandwidth-limited connections and wireless connections to mobile clients.

**Region of interest (ROI)**

Get every detail even on lower bandwidth or smaller video window by panning, tilting and zooming a region-of-interest cut-out from the full image. ROI is possible on both live viewing and playback of recordings.

**Advanced remote playback**

The latest enhancements by Bosch – Adaptive Bit Rate encoding and transcoding – allow replay of recordings over bandwidth-limited connections with smooth browsing through the footage while not missing any detail. Be it a remote guard searching for a specific evidence or alerted by alarm notification, quick access to the relevant recording is easily achieved, and recorded images are presented in original quality even over weak links.

**Transcoding**

The transcoder features eight profiles that can be predefined for various types of network connections. These profiles, selectable on the playback page, provide a quick and easy adaptation to the available bandwidth.

**Access security**

The devices offer various security levels for accessing the network, the unit, and the data channels. As well as password protection with three levels, they support 802.1x authentication using a RADIUS server for identification. You can secure Web browser access by HTTPS using a SSL certificate that is stored in the unit.

**Forensic search**

The transcoders provide forensic search in the recordings of its assigned IVA-enabled cameras. Simple line and field definitions, drawn over the video image, allow quick and efficient search through the metadata of camera recordings. Forensic search is possible via the Bosch Video Security app as well as the Web browser playback interface.

**Easy upgrade**

Remotely upgrade the devices whenever new firmware becomes available. This ensures up-to-date products, thus protecting investment with little effort.

**Certifications and approvals**

**Safety**

Region	Number
	IEC 60950-1

**System**

Region	Number
	IEC 62676-2
	EN 50132-5-2

**Electromagnetic compatibility**



Region	Number
EU	EN 55022 ITE
	EN 55024 ITE
	EN 61000-3-2
	EN 61000-3-3
	EN 50130-4 Alarm systems
	EN 50121-4 Railway
AUS/NZ	AS/NZS 3548 Class B
US	FCC 47 CFR Part 15 Subpart B Class B

**Approvals**

Region	Certification	
Europe	CE	VideoJet XF
USA	UL	Bosch UL online certifications directory (link)


**Installation/configuration notes**

**Dimensions (front view / side view)**

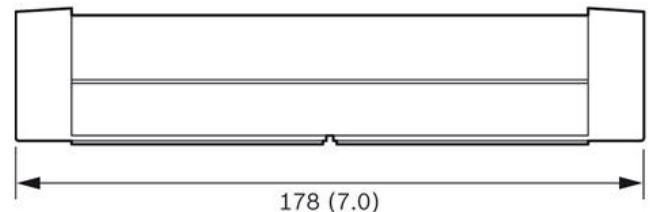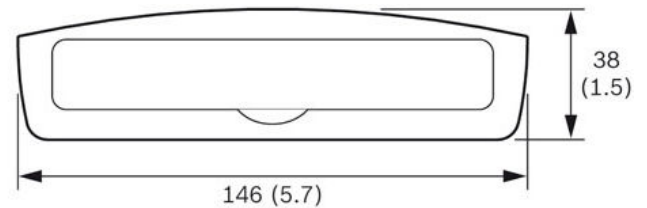

Dimensions in mm (in)


**Rear connectors and indicators**

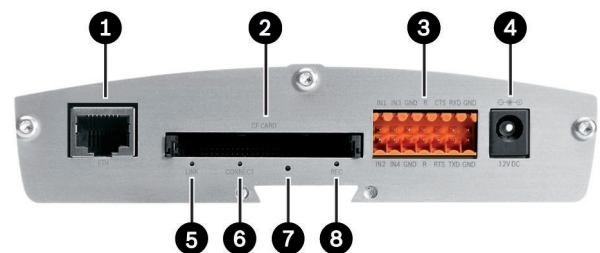

- 1 10/100 Base-T Fast Ethernet
- 2 CF CARD slot
- 3 LED LINK
- 4 LED CONNECT
- 5
- 6
- 7
- 8

- 3 Alarm in, relay out, COM (RS-232/422/485)
- 7 Factory reset button
- 4 Power 12VDC
- 8 LED REC

**Rack Mount Kit XF (optional)**

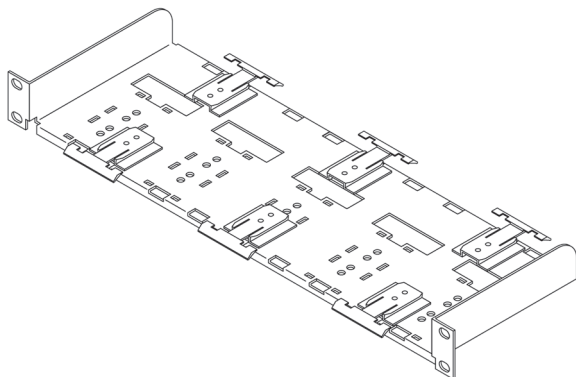

**Parts included**

Quantity	Component
1	VIDEOJET XTC XF Video Transcoder
1	Quick Installation Guide
1	Safety Hints document
1	Power supply unit with 3 primary adapters (EU, US, UK)
1	Set of spring clamp contact connectors, wall mount and desktop accessories

**Technical specifications**

<b>Input/output</b>	
Alarm	4 x input
• connector	Clamp (non-isolated closing contact)
• activation resistance	10 ohm max
Relay	1 x output
• connector	Clamp
• signal	30 Vpp (SELV), 200 mA
COM port	Clamp, RS-232/422/485, bidirectional
<b>Video</b>	
Standards	H.264 Main Profile, H.264 Baseline Profile (ISO/IEC 14496-10) M-JPEG, JPEG
Transcoding channels	2
Resolution	1080p30 max 720p60 max
Data rates	9.6 kbps to 10 Mbps per channel

<b>Video</b>	
Total delay	120 ms max
Frame rate	1 to 25/30 (PAL/NTSC)
<b>Network</b>	
Ethernet	10/100 Base-T, auto-sensing, half/full duplex, RJ45
Protocols	IPv4, IPv6, UDP, TCP, HTTP, HTTPS, RTP/RTCP, IGMP V2/V3, ICMP, ICMPv6, RTSP, FTP, Telnet, ARP, DHCP, NTP (SNTP), SNMP (V1, MIB-II), 802.1x, DNS, DNSv6, DDNS (DynDNS.org, selfHOST.de, no-ip.com), SMTP, iSCSI, UPnP (SSDP), DiffServ (QoS), LLDP, SOAP, Dropbox, CHAP, digest authentication
Encryption	TLS 1.0, SSL, DES, 3DES, AES
<b>Control</b>	
Software update	Flash ROM, remote programmable
Configuration	Configuration Manager or Web browser
<b>Storage medium</b>	
CompactFlash	1 x CF slot for optional standard Type I/II CompactFlash memory card, 2 TB max
<b>Electrical</b>	
Power supply	Via external unit
Input voltage	12 VDC
Current consumption	0.75 A
Power consumption	Approx. 9 W
<b>Mechanical</b>	
Dimensions (H x W x D)	38 x 146 x 178 mm (1.5 x 5.7 x 7.0 in)
Weight	Approx. 0.6 kg (1.3 lb)
<b>Environmental</b>	
<b>Operating temperature</b>	
• Transcoder	0 °C to +50 °C (+32 °F to +122 °F) ambient temperature
• Power supply	0 °C to +40 °C (+32 °F to +104 °F) ambient temperature
<b>Relative humidity</b>	
• Transcoder	0 to 90% atmospheric humidity, non-condensing
• Power supply	20 to 80% atmospheric humidity, non-condensing
Thermal value	31 BTU/h max

## Ordering information

### VIDEOJET XTC XF Video Transcoder

High-performance video transcoder. H.264; CF card slot; ROI; max resolution 1080p; 2 channels

Order number **VJT-XTCXF**

### Accessories

#### Rack Mount Kit XF

Rack mount kit for stand-alone encoders and decoders

Order number **VIP-VJTXF-RMK**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com