

Datasheet

ATRIUM/ RX26-SAT - Pluggable radio receiver

Product description

The RX26-SAT is a purpose built receiver for ATRIUM Access Control.

This PCB plugs directly into the ATRIUM controller to provide a radio receiver which does not require a housing or external power source. The PCB is the RF reader and RF transmitter information passes into the access system directly.

ATRIUM products include an embedded web server that combines performance and simplicity enabling users to manage transmitters, view system events and display controller information from anywhere in the world!

Key features

- Up to 100m range
- Rolling code security
- Includes tuned antenna
- 12 Vdc, 24 mA
- Plugs directly onto ATRIUM

ATRIUM
ACCESS CONTROL



Certification



DEEE

RoHS

Certification



-20°C to 70°C

Receiver Specifications

Type: Superheterodyne

Operating frequency: 433.92 MHz


Output Specifications

Type: Wiegand 26-bit

Electrical Specifications

Power supply: 12Vdc

Current consumption: 24mA

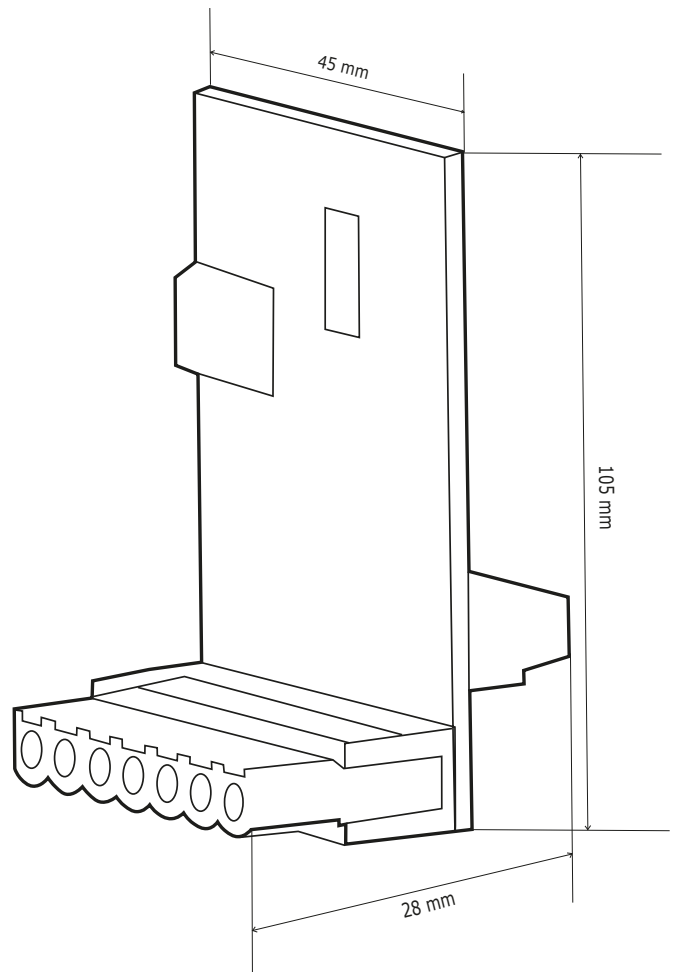

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - March 2020 - CDVI_DS_RX26-SAT_DS_01_EN_A4_C