

DH-DVR0404ME-S

4 Channel CF Card Mobile Standalone DVR



Features

- > Up to 4 cameras with SXGA realtime live view
- > H.264 dual-stream video compression
- > All channel CIF realtime recording
- > VGA/TV simultaneous video output
- > Full channel synchronous realtime playback
- > Support 2 CF cards, 1 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Aviation connectors adopted, Aluminum alloy case

DH-DVR0404ME-S

Technical Specifications

Model		DH-DVR0404ME-S
System		
Main Processor	Embedded processor	
Operating System	Embedded LINUX	
Video		
Input	4 channel	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)	
Audio		
Input	4 channel	
Output	1 channel	
Two-way Talk	1 channel Input, 1 channel Output, BNC	
Display		
Interface	1 VGA, 1 TV	
Resolution	1280x1024, 1024x768, 800x600	
Display Split	1/4	
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.264 / G711A	
Resolution	CIF (352×288/ 352×240)/QCIF (176×144/176×120)	
Record Rate	Main Stream	CIF /QCIF(1~100/120fps),
	Sub Stream	CIF/QCIF(1~100/120fps)
Bit Rate	32~1024 Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection & Alarm		
Trigger Events	Recording, PTZ, Tour, Alarm, Email, FTP, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input	7 channel	
Relay Output	2 channel	
Playback & Backup		
Playback Channel	1/2/4	
Search Mode	Time/Date, Alarm, Motion Detection & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device / CF Card / Network	
Network		

DH-DVR0404ME-S


Ethernet	RJ-45 port (10/100M)
Wireless Network	Built-in 3G module(optional)
GPS	Built-in high accurate GPS module(optional)
Network Functions	HTTP, IPv4, TCP/IP, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, FTP, IP Filter
Max. User Access	10 users
Storage	
CF Card	2 CF Card
Auxiliary Interface	
USB	1 ports (front), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	DC 8V~32V
Power Consumption	≤10W
Working Environment	-20°C – +60°C (Include Embedded Power-supply) / 5%~95%RH / 86~106kpa
Dimension (W×D×H)	178mm×50mm×220mm
Weight	1.5KG(CF Card Included)
Vibration-proof	5Hz~300Hz: X / Y / Z each direction 8 hours 5Hz~11Hz: Vibration amplitude 10mm 11Hz~300Hz: 50m/s ²

Rear Panel



DH-DVR0404ME-S

Dimension

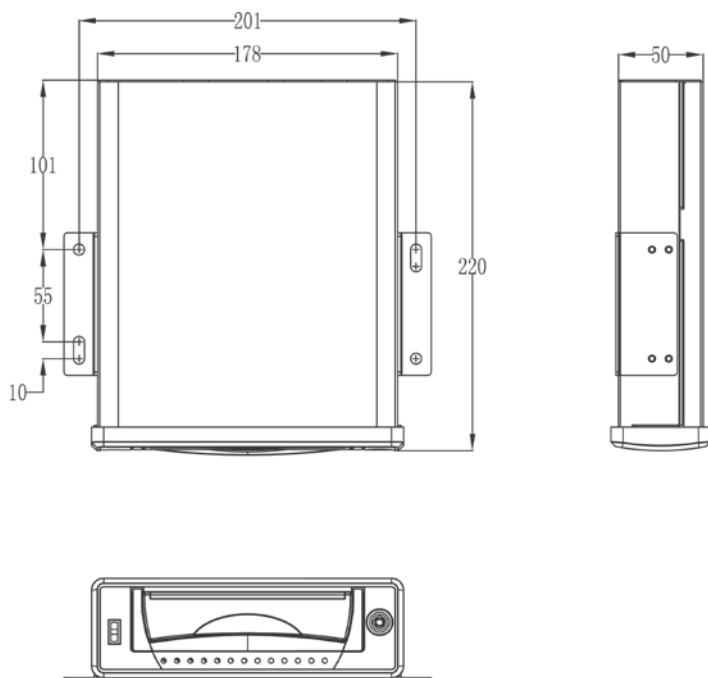

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.