

DH-HCVR5824/5832S

24/32CH 720P 2U HDCVI DVR



Features

- > Up to 24/32 cameras input
- > H.264 dual-stream video compression
- > HCVR5824/5832S: All channel 720P realtime recording
- > 2HDMI/VGA/TV simultaneous video output
- > 16 channel synchronous realtime playback, GRID interface & smart search
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

DH-HCVR5824/5832S


Technical Specifications

| Model | | DH-HCVR5824S | DH-HCVR5832S |
|------------------------------------|--------------|---|------------------|
| System | | | |
| Main Processor | | Embedded processor | |
| Operating System | | Embedded LINUX | |
| Video | | | |
| Input | | 24 channel, BNC | 32 channel, BNC |
| Standard | HDCVI | 1080P/720P HDCVI Camera | |
| | IP | 1080P/720P/D1/CIF IP Camera | |
| Audio | | | |
| Input | | 16 channel, BNC | |
| Output | | 1 channel, BNC | |
| Two-way Talk | | 1 channel Input, 1 channel Output, BNC | |
| Display | | | |
| Interface | | 2 HDMI, 1 VGA, 1 TV | |
| Resolution | | 1920×1080, 1280×1024, 1280×720, 1024×768 | |
| Display Split | | 1/4/8/9/16/25 | 1/4/8/9/16/25/36 |
| Privacy Masking | | 4 rectangular zones (each camera) | |
| OSD | | Camera title, Time, Video loss, Camera lock, Motion detection, Recording | |
| Recording | | | |
| Video/Audio Compression | | H.264/G.711 | |
| Record Rate | Main Stream: | 720P/960H/D1/HD1/2CIF/CIF(1~25/30fps) | |
| | Extra Stream | CIF/QCIF(1~25/30fps) | |
| Bit Rate | | 48~4096Kb/s | |
| Record Mode | | Manual, Schedule(Regular(Continuous), MD), Stop | |
| Record Interval | | 1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec | |
| Video Detection & Alarm | | | |
| Trigger Events | | Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips | |
| Video Detection | | Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank | |
| Alarm Input | | 16 channel | |
| Relay Output | | 6 channel | |
| Playback & Backup | | | |
| Sync Playback | | 1/4/8/16 | |
| Search Mode | | Time/Date, MD & Exact search (accurate to second) | |
| Playback Functions | | Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom | |
| Backup Mode | | USB Device/eSATA Device/Internal SATA burner/Network | |
| Network | | | |

DH-HCVR5824/5832S

| | |
|----------------------------|--|
| Ethernet | 2RJ-45 port (10/100M/1000M) |
| Network Functions | HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P |
| Max. User Access | 128 users |
| Smart Phone | iPhone, iPad, Android, Windows Phone |
| Storage | |
| Internal HDD | 8 SATA ports(8HDDs or 6HDDs+1CD/DVD-RW), up to 32TB |
| External HDD | 1 eSATA port, up to 16TB |
| Auxiliary Interface | |
| USB Interface | 4 ports (2 Rear), USB2.0 |
| RS232 | 1 port, For PC communication & Keyboard |
| RS485 | 1 port RS485 for PTZ control, 1 port RS422 for Keyboard |
| General | |
| Power Supply | AC 100~240 V, 50/60 Hz |
| Power Consumption | 40W(Without HDD) |
| Working Environment | -10°C ~ +55°C/10%~90%RH / 86~106kpa |
| Dimension(W×D×H) | 2U, 440mm×460mm×89mm |
| Weight | 6.5KG(without HDD) |

System Connection

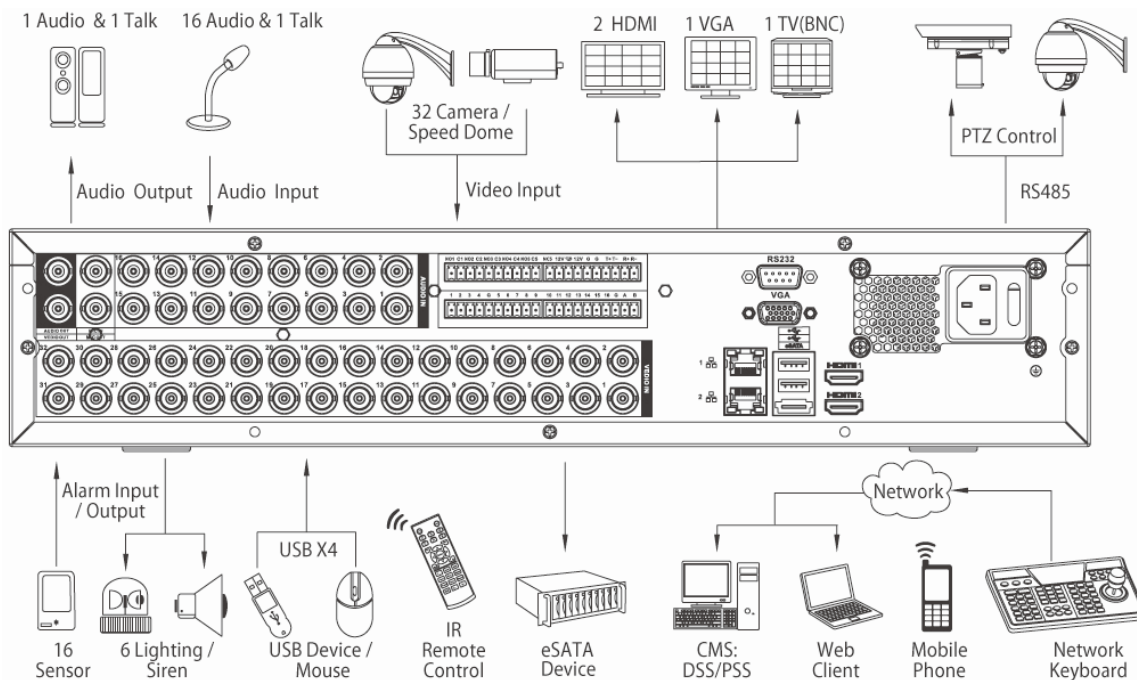

*Takes HCVR5832S as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

DH-HCVR5824/5832S

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.