

DH-HDC-HFW2200S

Full HD HD-SDI Mini IR-Bullet Camera



DH-HDC-HFW2200SP: FULL HD, 25fps@1080P, 50fps@720P, HD-SDI, IP66

DH-HDC-HFW2200SN: FULL HD, 30fps@1080P, 60fps@720P, HD-SDI, IP66

Features

- > 1/3" 3.0 Megapixel progressive scan CMOS image sensor
- > High color reproduction and high sensitivity
- > Standard HD-SDI high definition digital interface (SMPT274/292)
- > Full 1080P(1920×1080)@25/30fps, 720P(1280×720)@50/60fps HD-SDI video out
- > Built-in Fixed Lens 3.6mm/F1.6 (6mm Optional)
- > IR distance Max 20m
- > Support ICR true Day/Night
- > Support RS485 System parameters configuration
- > IP66 Waterproof
- > Support DC12V
- > Support OSD menu

Specifications


Model	DH-HDC-HFW2200SP	DH-HDC-HFW2200SN
Camera		
Image Sensor	1/3" 3.0 Megapixel progressive scan CMOS	
Effective Pixels	2052 (H)×1536(V)	

DH-HDC-HFW2200S

Electronic Shutter	Auto/Manual, 1/3~1/10,000s	Auto/Manual, 1/4~1/10,000s
Mini. Illumination	0.1LUX/F1.4(Color), 0.01LUX/F1.4(B/W); 0 lux(IR on)	
Signal Noise Ratio	> 50dB	
Gain Control	Auto/Manual	
White Balance	Auto/Manual	
Day/Night	ICR	
Video		
Image Resolution	25fps@1080P(1920×1080)/720P (1280×720); 50fps@720P(1280×720)	30fps@1080P(1920×1080)/720P (1280×720); 60fps@720P(1280×720)
Video Format	PAL	NTSC
HD-SDI Video Output	1ch HD-SDI high-definition video (SMPTE 274/292 standard)	
Lens		
Lens	3.6mm (6mm optional)	
Auto Iris	Fixed	
Mount	Board-in type	
Other Interface		
RS485	System parameters configuration, OSD Menu	
Environmental		
IR Distance	Max. 20m	
Ingress Protection	IP66	
Power Supply	DC12V	
Power Consumption	3W (6W IR on)	
Operating Environment	-10°C~ +60°C, 10%~90%	
Dimension	Φ66mm×160mm	
Weight	0.5kg	

DH-HDC-HFW2200S

Dimensions (mm)

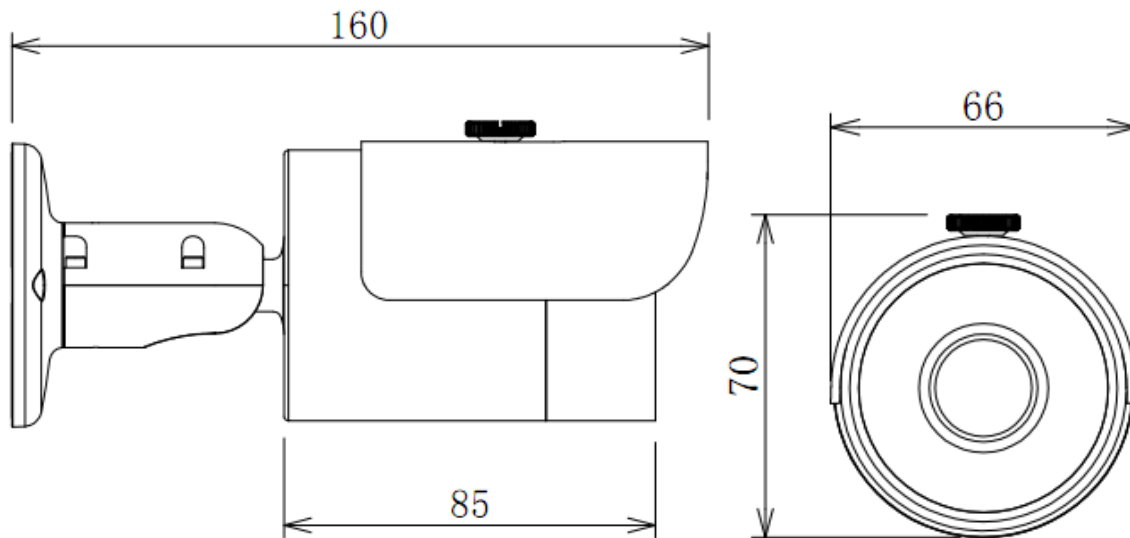

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.