

DH-NVR7808/7816/7832/7864

8/16/32/64 Channel 2U Network Video Recorder



Features

- > Up to 8/16/32/64 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 256Mbps incoming bandwidth
- > HDMI / VGA/TV simultaneous video output up to 1080P live view
- > 8/16/32 channel synchronous realtime preview, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.3 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA port, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-NVR7808/7816/7832/7864


Technical Specifications

Model	DH-NVR7808	DH-NVR7816	DH-NVR7832	DH-NVR7864
System				
Main Processor	Dual-core embedded processor			
Operating System	Embedded LINUX			
Video & Audio				
IP Camera Input	8 channel	16 channel	32 channel	64 channel
Two-way Talk	1 channel input, 1 channel output, BNC			
Display				
Interface	1 HDMI, 1 VGA, 1TV			
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768 & etc.			
Display Split	1/4/8/9	1/4/8/9/16	1/4/8/9/16/25/36	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recording				
Compression	H.264 / MJPEG			
Resolution	5Mp(2560× 1920)/3Mp(2048× 1536)/1080P(1920× 1080)/720P(1280× 720)/D1(704× 576/704× 480) & etc.			
Record Rate	192Mbps			
Bit Rate	48~ 8192kbps			
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop			
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
Video Detection & Alarm				
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips			
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Alarm Input	8 channel	16 channel	16 channel	16 channel
Relay Output	3 channel	6 channel	6 channel	6 channel
Playback & Backup				
Sync Playback	1/4/9	1/4/9/16	1/4/9/16	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search			
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom			
Backup Mode	USB Device / eSATA Device / Internal SATA burner/ Network			
Network				
Ethernet	2 RJ-45 ports (10/100/1000Mbps)			
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)			
Max. User Access	128 users			
Smart Phone	iPhone, iPad, Android, Windows Phone			
Storage				

DH-NVR7808/7816/7832/7864

Internal HDD	8 SATA ports (8HDDs or 6HDDs+1CD/DVD-RW), up to 32TB
External HDD	1 eSATA port
Auxiliary Interface	
USB	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC 100V~240V, 50/60 Hz
Power Consumption	75W (without HDD)
Working Environment	-10°C~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	2U, 440mm×460mm×89mm
Weight	6KG (without HDD)

System Connection

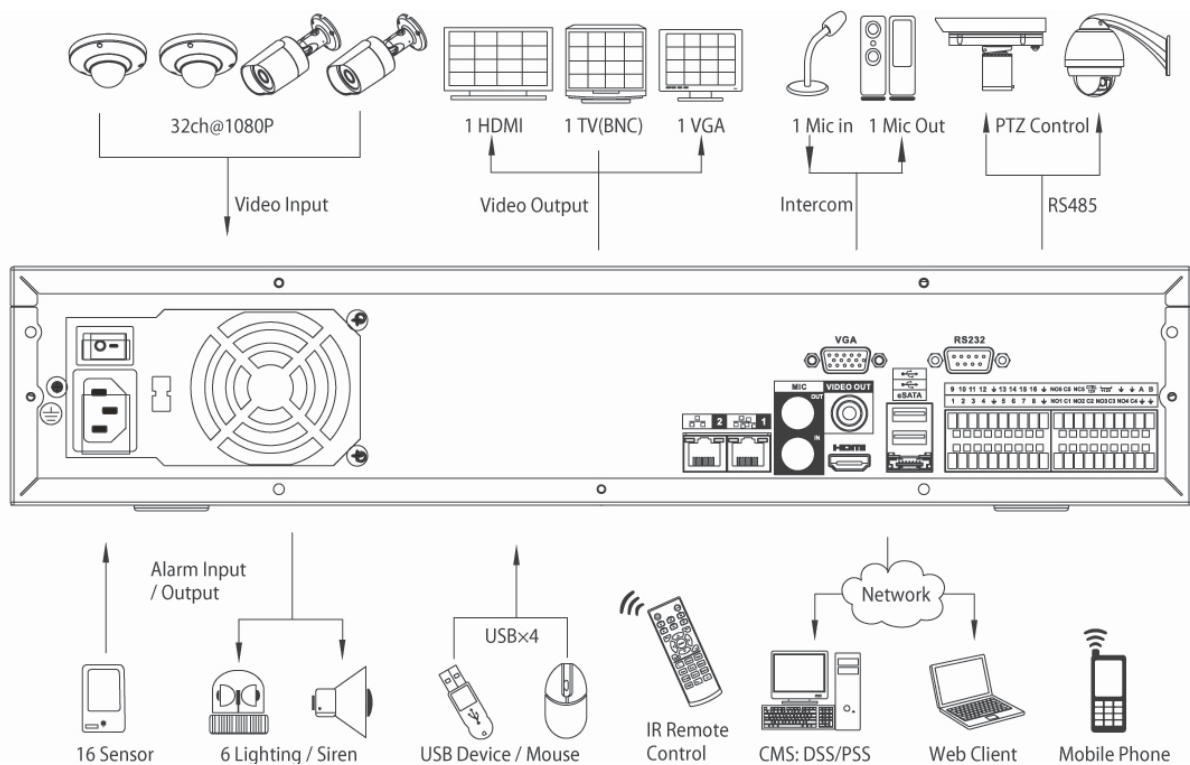

* Take NVR7832 as an example

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

DH-NVR7808/7816/7832/7864
