

DH-S1000-8TP

8-Port 100Mbps POE Switch



Features


- 1*1000Mbps SFP optical port , 1*1000Mbps RJ45 port and 8*100Mbps RJ45 ports
- Switch capacity 5.6Gbps, forwarding rate 8.3 Mbps
- IEEE802.3af, IEEE802.3at standards
- High performance lookup engine with support for up to 8K MAC address entries with automatic
- Port self-adaptive MDI/MDIX modes
- Indicator displays Link/Act status
- Metal plate, brand new design
- AC 220 power supply

DH-S1000-8TP

Specifications


Model	DH-S1000-8TP
Physical Port	
Network Port	8*10/100 Base-T; 1*10/100/1000 Base-T; 1*1000 Base-X
Technical Index	
Switch Capacity	5.6Gbps
Forwarding Rate	8.3Mpps
Switch Mode	Storage forwarding
MAC Study	MAC auto study, address list capacity is 8K
POE Standard	IEEE802.3af、 IEEE802.3at
Output Power Per Port	RJ 45 port1,2 support 60W IEEE802.3af, IEEE802.3at RJ45 port 3,4 support IEEE802.3 af ,IEEE802.3at RJ45 port 5,6,7,8 support IEEE802.3 af
Total output Power	120W
Other	
Power	AC 100~240V
Power Consumption	≤190W
Temperature	-10°C ~55°C
Humidity	10%~90% RH
Dimensions(W x D x H)	300mm×220mm×44.4mm
Installation	Rack-mounted

Dimensions (mm)

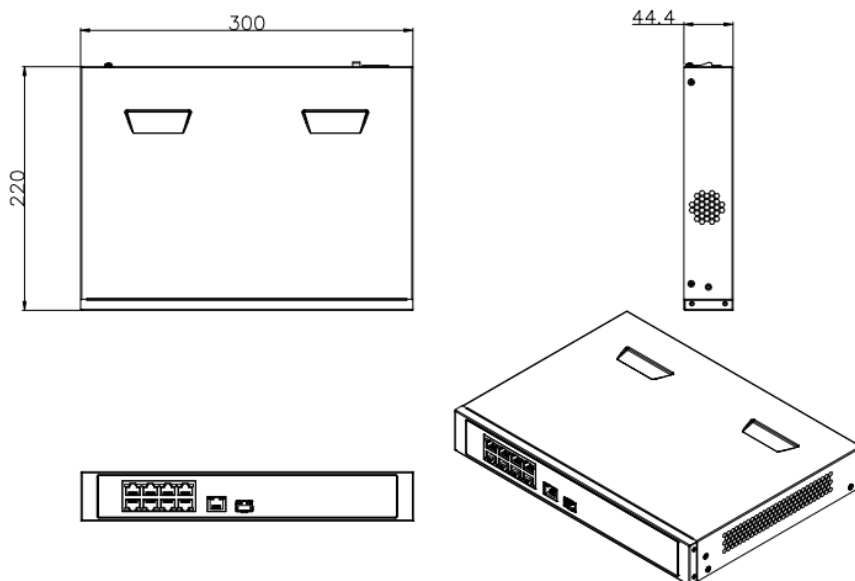

DH-S1000-8TP

Application

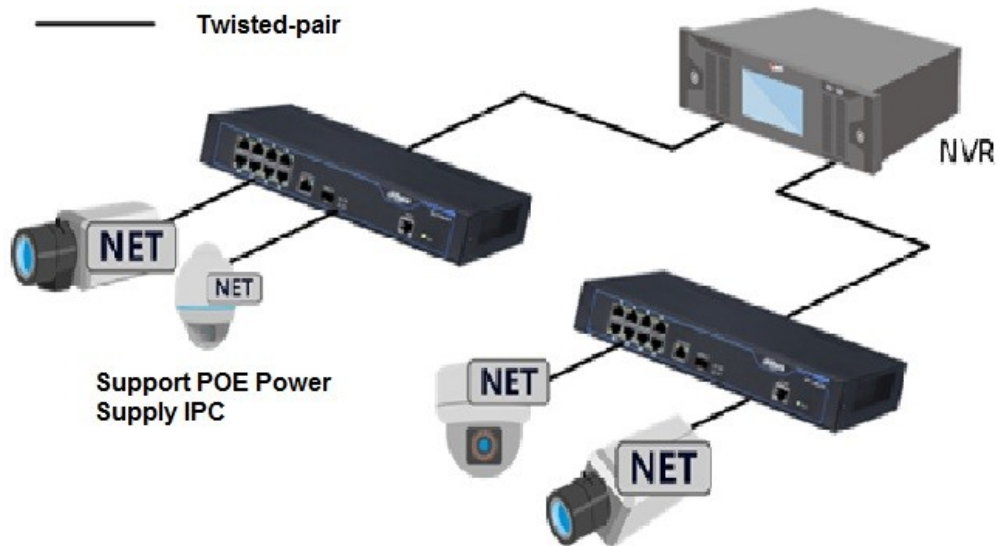

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.