

## DH-S3000-16X

---

### 16-Port Fiber Switch



### Features


- 16\*100Mbps SFP fiber ports and 2\*1000Mbps Combo ports
- Switch capacity 7.2Gbps, including transmission rate 10.7 Mbps
- IEEE802.3, IEEE802.3u, IEEE802.3ab/z and IEEE802.3X standards
- High performance lookup engine with support for up to 8K MAC address entries with automatic
- Port self-adaptive MDI/MDIX modes
- Support WEB, SNMP (v1/v2c), link aggregation
- IEEE802.3X dual full flow control and Backpressure half-dual flow control
- Indicator displays Link/Act status
- Generate tree protocol STP/RSTP
- Port isolation, speed limit, mirroring, 802.1Q VLAN, link aggregation
- 802.1p and the port's default priority
- Anti-MAC address flooding
- Metal plate, brand new design
- AC 220 power supply

# DH-S3000-16X

## Specifications


<b>Model</b>	<b>DH-S3000-16X</b>
<b>Physical Port</b>	
Network Port	16 x 100Mbps SFP fiber ports and 2 x 1000Mbps Combo ports (optical or electrical )
Console Port	1 Console port
<b>Technical Index</b>	
Switch Capacity	7.2Gbps
Forwarding Rate	10.7Mpps
Switch Mode	Storage forwarding
MAC Study	MAC auto study, address list capacity is 8K
VLAN	802.1Q VLAN
Security	Anti MAC address flooding
	Port isolation
Priority (QOS)	Support 802.1p, DSCP priority
Protocol	STP, RSTP
Network Management	WEB, SNMP network management (v1/v2c)
<b>Other</b>	
Power	AC 90~264V
Power Consumption	≤30W
Temperature	-10°C ~55°C
Humidity	10%~90% RH
Installation	19" 1U standard bracket installation

## Dimensions (mm)

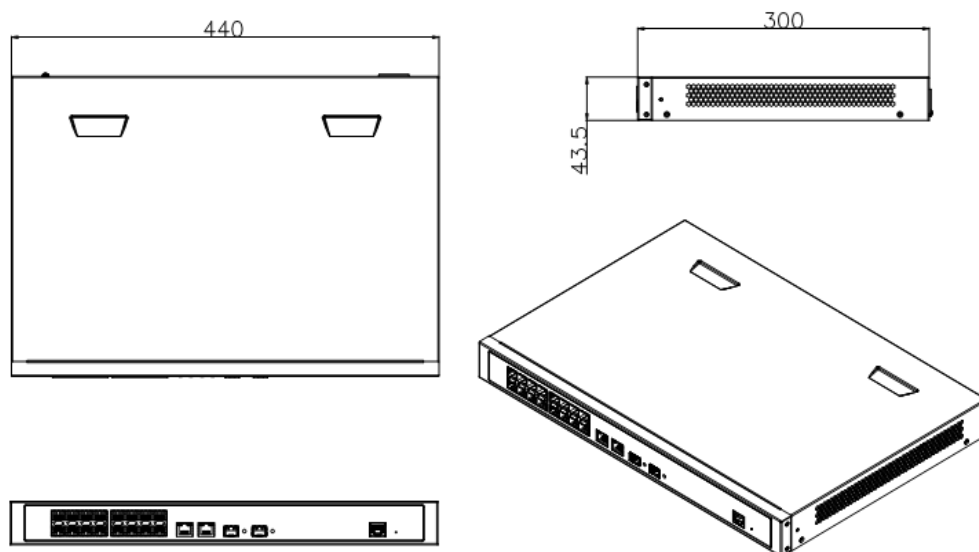

# DH-S3000-16X

## Application

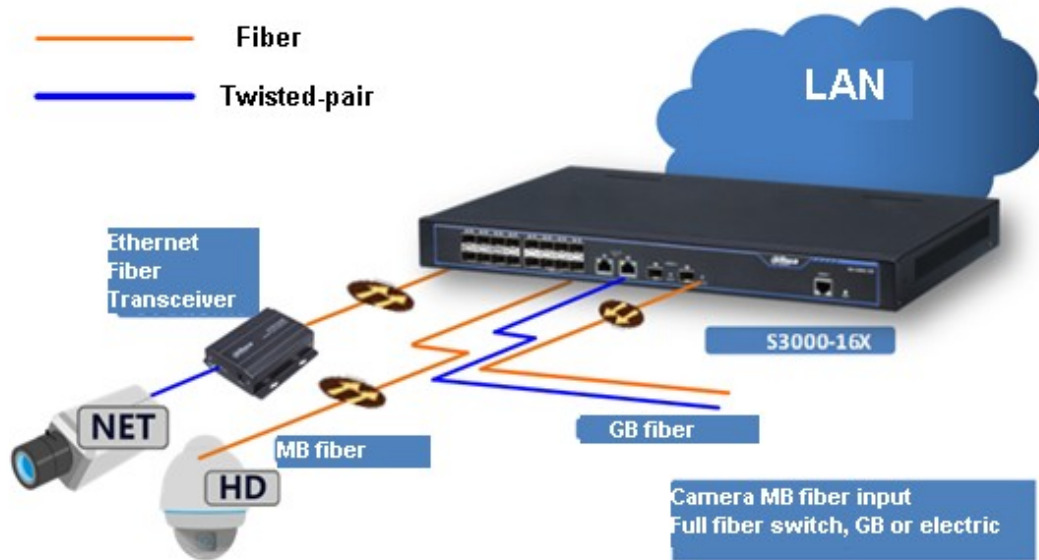

---

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.