

DH-PFB603C

Ceiling Mount Bracket



 $^{\circ}\text{C}$ to +60 $^{\circ}\text{C}$ (–40 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F})$ and in environments with relative

- · Aluminum alloy material, cost-effective
- · Dedicated for particular cameras, beautiful and elegant designed







Series overview Ordering Information Ideal for mounting cameras, it works in temperatures ranging from –40 Type Model

Technical Specification

humidity of less than 90%.

Structure


Material	Aluminum alloy
Dimensions	246.0 mm \times 88.0 mm \times 493.0 mm (9.68" \times 3.46" \times 19.41") (L \times W \times H)
Color	White
Net Weight	0.67 kg (1.48 lb)
Gross Weight	0.88 kg (1.94 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	Ceiling mount
Rotation Angle	Pan: 0° to 180°; Tilt: -30° to 30°
Applicable Camera	Please see "Accessory Selection"
Product Dimensions	215.0 mm × 95.0 mm × 520.0 mm (8.46" × 3.74" × 20.47") (L × W × H)
Packaging Dimensions	450.0 mm × 490.0 mm × 520.0 mm (17.71" × 19.29" × 20.47") (L × W × H)
Packaging Method	10 pcs in each master carton

Environment


Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10%-90% (RH)

Type Model Description Camera Mount DH-PFB603C Ceiling Mount Bracket

Installation

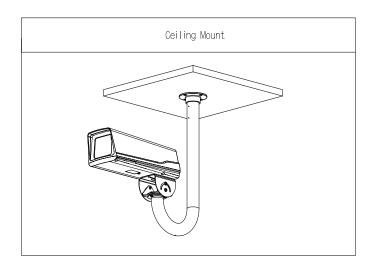

Dimensions (mm[inch])

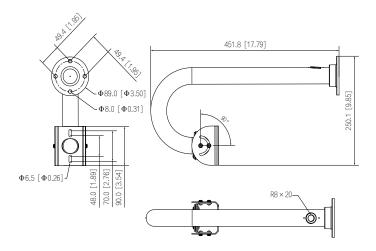

Package Information

- · Ceiling Mount Bracket *1
- · M6 Metal Expansion Bolt *4
- · 1/4-20×8 UNC screws *2
- · M6×10 screws *2
- · S3.0 wrench *1