
DIGIMERGE

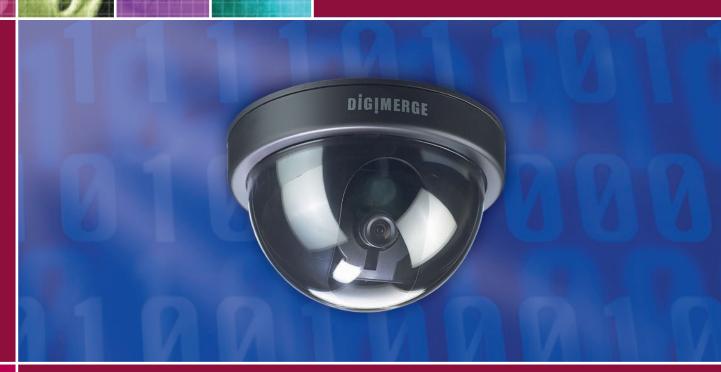

DD6200 - Hi Resolution Color Dome Camera

Features

- 1/3" Sony Super HAD Color CCD
- · Hi Res (470TV lines)
- High Sensitivity with 0.7 Lux
- 360° adjustable Viewing Direction
- · Quick and Easy to Install
- · Wall or Ceiling Mountable

An easy to install, compact Hi Resolution color dome. The unit has a resolution of 470 TV lines and a minimum illumination of 0.7 Lux at F1.2. The compact design is suitable for modern interior places such as hotels, theaters, restaurants, airports, department stores, and office buildings.

Specifications

Image Sensor	1/3" Interline transfer type color CCD (Sony)
Effective Pixels (PAL)	752H ×582V (440K pixels)
Scanning System (PAL)	625 Lines 2:1 Interlace
Scanning Frequency (PAL)	15.625KHz (H), 50Hz (V)
Resolution	470 TV - Lines
Shutter Speed (PAL)	1/50 ~ 1/100,000 sec
S/N Ratio	More than 48dB (AGC off)
Sync. System	Internal/Line Lock Mode
Min. Illumination	0.7 Lux (F1.2)
White Balance	AWB
Lens	Fixed Lens
Video Output	VBS 1.0 Vp-p (75 Ω load)
Power Supply	DC12V (10.5V~15V)
Power	160mA (DC12V)
Operating Temp.	-10 ~ +50
Operating Humidity	90% RH max.