



**Eagle Eye Cloud Security Camera VMS
Product Catalog**

North America

+1-512-473-0500

sales@EagleEyeNetworks.com

www.EagleEyeNetworks.com


Europe

+31 20 26 10 469

EMESales@EagleEyeNetworks.com

www.EagleEyeNetworks.com

Subscriptions

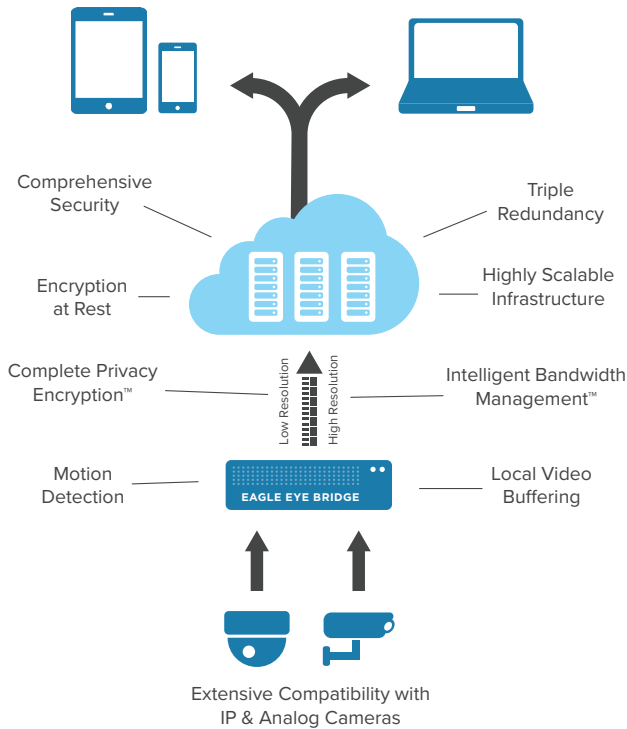

Camera Subscriptions

The Eagle Eye Security Camera VMS is delivered via a few simple subscription options. These subscriptions provide the cloud management system and cloud recording. All subscriptions include Web and Mobile Access. Each camera managed by a Bridge will need a subscription.

For example, if you have a site that has 5 HD cameras running at 720p and you want to store 7 days of video, you will need 1 Bridge and 5 subscriptions for the HD1-7 subscription. If you don't see a subscription that fits your needs, just ask us. We have other options available with more storage and higher resolution.

Resolution	Analog Resolution up to 640 x 480		720p Resolution up to 1280 x 720		1080p Resolution up to 1920 x 1080	
	Cloud Storage	7 days	30 days	7 days	30 days	7 days
Subscription	SD-7	SD-30	HD1-7	HD1-30	HD2-7	HD2-30

* Longer Retention Available - Up to 5 Years *

CMVR Subscriptions

While video is stored on the CMVR, it is still securely accessed through the Eagle Eye Cloud via your choice of web browser or mobile device. The Eagle Eye Security Camera VMS also manages the CMVRs providing information about camera availability, system health and issuing alerts.

M-10 Subscription: The M-10 is required for each camera that does not have cloud storage. It provides secure remote access, as well as management functionality.

Eagle Eye Bridges

Eagle Eye Bridges are on-site appliances that are designed to buffer video on site, until there is bandwidth available to send it to the Eagle Eye Cloud. Video comes from cameras, is processed for motion detection, encrypted, and then stored on the local hard drive. It is then sent to the cloud based on available bandwidth, user demand, a user defined schedule, and a variety of other factors. Eagle Eye Networks offers an assortment of bridges, supporting anywhere from 6 to 32 cameras.



Eagle Eye CMVRs

Eagle Eye CMVRs allow for both local and cloud video storage. Users may select any combination on a camera-by-camera basis. Like bridges, Eagle Eye CMVRs automatically transmit camera and system status information to the Eagle Eye Cloud. CMVRs are used when there is not enough bandwidth to send all of the video to the cloud, or there is a policy or regulatory requirement for on-premise video storage. Eagle Eye offers a variety of CMVRs, supporting anywhere from 6 to 180 cameras.



Bridges

Compact Bridges

These bridges are compact but powerful. They provide the same features and functions of their larger counterparts, yet they fit in the palm of your hand. With options for WiFi, SSD storage, and an extended temperature range, the compact bridges are a great entry point for any customer.

Bridge 304



Bridge 304s



Bridge 304w



Bridge 305



SSD Storage



WiFi Connectivity



Extended Temperature Range:
-10° - 60° C
14° - 140° F

Bridge 305s



MODEL	Bridge 304	Bridge 304s	Bridge 304w	Bridge 305	Bridge 305s
Number of Cameras	15 HD IP	6 HD IP	15 HD IP (4 WiFi)	15 HD IP (4 Direct)	4 Direct
Local Storage	2 Day Buffering	2 Day Buffering	2 Day Buffering	2 Day Buffering	2 Day Buffering
Cloud Storage	Unlimited Recording	Unlimited Recording	Unlimited Recording	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit	Dual Gigabit	1 Gigabit + 4 PoE	1 Gigabit + 4 PoE
Mount	Shelf or Wall	Shelf or Wall	Shelf or Wall	Shelf or Wall	Shelf or Wall
Dimensions	5" x 5" x 1.75"	5" x 5" x 1.75"	5" x 5" x 1.75"	5.71" x 5.12" x 2.95"	5.71" x 5.12" x 2.95"
Power Supply	External	External	External	External	External

Standard IP Bridges

These bridges are designed to be rack mounted. The 300 series supports up to 15 IP cameras, while the 400 series supports up to 30 IP cameras. The 303 and 403 have integrated, managed PoE ports.

Bridge 301



Bridge 401



Bridge 303




Bridge 403



MODEL	Bridge 301	Bridge 401	Bridge 303	Bridge 403
Number of Cameras	15 HD IP	30 HD IP	15 HD IP (8 Direct)	30 HD IP (8 Direct)
Local Storage	2 Day Buffering	2 Day Buffering	2 Day Buffering	2 Day Buffering
Cloud Storage	Unlimited Recording	Unlimited Recording	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit
Integrated PoE	—	—	8 PoE Ports, Class 3	8 PoE Ports, Class 3
Mount	Rack	Rack	Rack	Rack
Dimensions	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"
Power Supply	Single	Single	Single	Single

Combo Bridges

These bridges are designed to be rack mounted. They support analog and IP cameras on the same device. The analog cameras connect directly to the bridge - no external encoder needed. These bridges are great for customers who are migrating from analog to IP, allowing them to upgrade their cameras at their own pace.

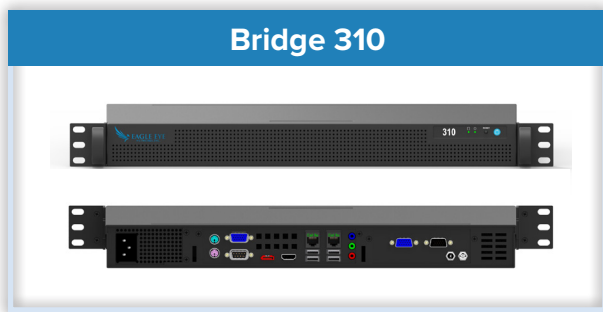

MODEL	Bridge 310	Bridge 410
Number of Cameras	8 Analog or 16 HD IP	16 Analog or 32 HD IP
Analog Format	NTSC or PAL	NTSC or PAL
Local Storage	2 Day Buffering	2 Day Buffering
Cloud Storage	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit
Mount	Rack	Rack
Dimensions	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"
Power Supply	Single	Single

Compact CMVRs

These CMVRs are compact but powerful. They provide the same features and functions of their larger counterparts, yet they still fit in the palm of your hand. These CMVRs support 6 to 12 IP cameras.



MODEL	CMVR 224	CMVR 324
Number of Cameras	6 HD IP	12 HD IP
Local Storage	1 TB	2 TB
On-Premise	23 Days*	23 Days*
Cloud Storage	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit
Mount	Shelf or Wall	Shelf or Wall
Dimensions	5" x 5" x 1.75"	5" x 5" x 1.75"
Power Supply	External	External



Standard IP CMVRs

These CMVRs are designed to be rack mounted. They support 15 to 30 IP cameras.



MODEL	CMVR 320	CMVR 420
Number of Cameras	15 HD IP	30 HD IP
Local Storage	3 TB	4 TB
On-Premise	36 Days*	18 Days*
Cloud Storage	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit
Mount	Rack	Rack
Dimensions	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"
Power Supply	Single	Single

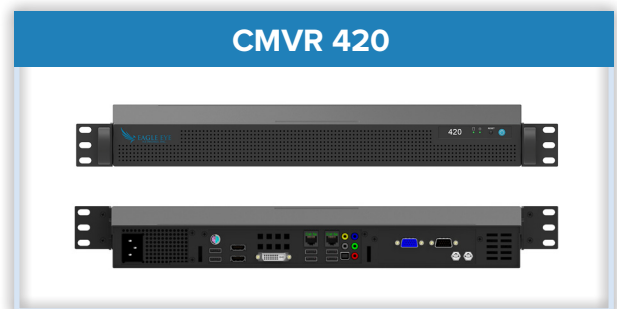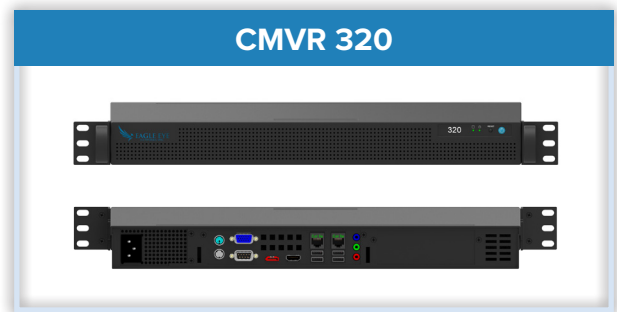

*Based on 50% data cycle and the maximum number of HD cameras

Combo CMVRs

These CMVRs are designed to be rack mounted. They support analog and IP cameras on the same device. The analog cameras connect directly to the CMVR - no external encoder needed. These units are great for customers who are migrating from analog to IP, allowing them to upgrade their cameras at their own pace.

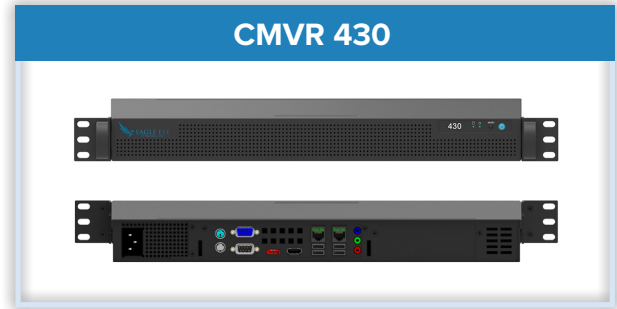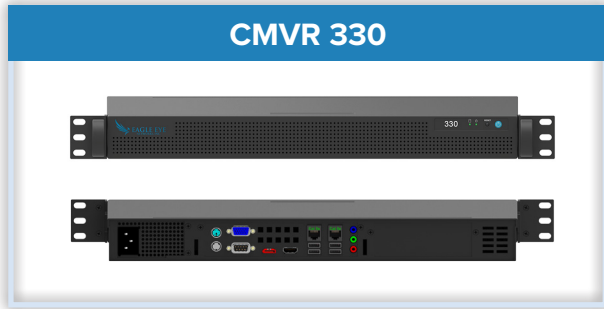

MODEL	CMVR 330	CMVR 430
Number of Cameras	8 Analog or 15 HD IP	16 Analog or 32 HD IP
Analog Format	NTSC or PAL	NTSC or PAL
Local Storage	3 TB	4 TB
On-Premise	27 Days*	18 Days*
Cloud Storage	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit
Mount	Rack	Rack
Dimensions	16.8" x 12" x 1.7"	16.8" x 12" x 1.7"
Power Supply	Single	Single

*Based on 50% data cycle and the maximum number of HD cameras

Enterprise CMVRs

These CMVRs are commercial grade appliances, built for locations with 60+ cameras. They all contain local RAID, and some offer redundant power supplies. These are full depth, 1U or 2U rack mounted appliances. They provide all of the same software features as the other CMVRs, but with the power needed for larger camera counts.

CMVR 520

CMVR 620

CMVR 820


MODEL	CMVR 520	CMVR 620	CMVR 820
Number of Cameras	60 HD IP	120 HD IP	180 HD IP
Local Storage	8 TB RAID	12 TB RAID	50 TB RAID
On-Premise	14 Days*	18 Days*	18 Days*
Cloud Storage	Unlimited Recording	Unlimited Recording	Unlimited Recording
Network Ports	Dual Gigabit	Dual Gigabit	Dual Gigabit
Mount	Rack	Rack	Rack
Dimensions	19.8" x 17.2" x 1.7"	19.8" x 17.2" x 1.7"	17.2" x 25.5" x 3.5"
Power Supply	Single	Single	Dual

*Based on 50% data cycle and the maximum number of HD cameras


Managed Switches



Managed Switches

Eagle Eye Managed PoE Switches reduce installation time and allow for easier maintenance. Authorized users can power cycle a camera remotely. These switches are designed specifically for video surveillance, allowing remote configuration and management. There's no need to send service personnel to reboot or restart cameras. Eagle Eye offers four Managed PoE Switch models - 5, 8, 16, or 24 PoE ports. Each chassis is a sturdy steel construction and works right out of the box.

EN-SW05m-001

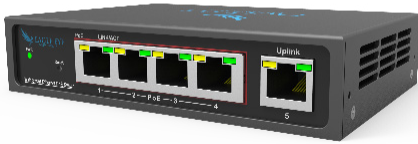

Avail.
Q4
2017

EN-SW10m-001




EN-SW18m-001



EN-SW26m-001



MODEL	EN-SW05m-001	EN-SW10m-001	EN-SW18m-001	EN-SW26m-001
Total Number of Ports	5 ports (4 PoE, 1 Uplink)	10 ports (8 PoE, 2 Uplink)	18 ports (16 PoE, 2 Uplink)	26 ports (24 PoE, 2 Uplink)
PoE Ports	4 PoE	8 PoE	16 PoE	24 PoE
Uplink Ports	1 Uplink	2 Uplink +1 Gig Combo +1 Gig SFP Uplink	2 Uplink +2 Gig Combo Uplink	2 Uplink +2 Gig Combo Uplink
Power Supply	External Power Supply	External Power Supply	Built-In Power Supply	Built-In Power Supply
Voltage Range	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Maximum Power Budget	60W	125W	250W	370W
Speed	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps
Dimension (L x W x H)	119 x 85 x 28 mm 4.7 x 3.3 x 1.1 in	218 x 107 x 29 mm 8.6 x 4.2 x 1.1 in	440 x 200 x 44 mm 17.3 x 7.9 x 1.7 in	440 x 200 x 44 mm 17.3 x 7.9 x 1.7 in
Switching Capacity	1G	5.6G	7.2G	8.8G
MAC Address	2K MAC address table	4K MAC address table	4K MAC address table	4K MAC address table
Temperature Range	-10 - 55° C 14 - 131° F	0 - 40° C 32 - 104° F	0 - 40° C 32 - 104° F	0 - 40° C 32 - 104° F
Storage Temperature	-40 - 70° C -40 - 158° F	-40 - 70° C -40 - 158° F	-40 - 70° C -40 - 158° F	-40 - 70° C -40 - 158° F
PoE Specifications	802.3af & 802.3at	802.3af & 802.3at	802.3af & 802.3at	802.3af & 802.3at

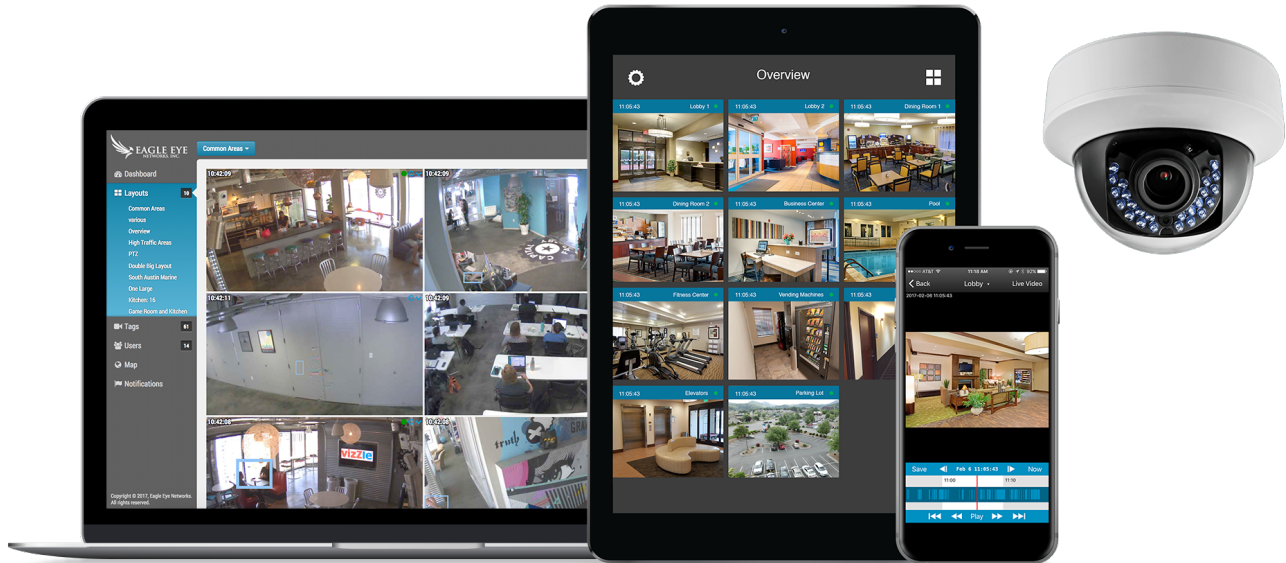

Company Overview

Founded in 2012, Eagle Eye Networks, is the leading global provider of cloud-based video surveillance solutions addressing the needs of businesses, alarm companies, security integrators, and individuals. Eagle Eye's 100% cloud managed solutions provides cloud and on-premise recording, bank level security and encryption, and broad analog and digital camera support - all accessed via the web or mobile applications. Businesses of all sizes and types utilize Eagle Eye solutions for operational optimization and security. All Eagle Eye products benefit from Eagle Eye's developer friendly RESTful API platform and Big Data Video Framework™, which allow for indexing, search, retrieval, and analysis of live and archived video. Eagle Eye's open Video API has been widely adopted for integration in alarm monitoring, third party analytics, security dashboards, and point of sale system integrations.

Eagle Eye sells its products through authorized global resellers and installation partners. Headquartered in Austin, Texas, USA, Eagle Eye also has offices in Europe and Asia.

The Eagle Eye Difference



Eagle Eye Networks was created to make video security easier. Camera systems have traditionally been complex and challenging for people to manage. With the Eagle Eye Cloud Security Camera VMS, you can deploy multiple cameras at multiple locations, without installing software or purchasing large servers.

A cloud service is a top to bottom approach. The Eagle Eye Cloud Security Camera VMS has been developed from the ground up by a team of focused engineers with a background in developing large scale cloud systems. It was designed to be reliable, multi-tenant, and highly scalable. This was not an attempt to retro-fit an existing on-premise video product into the cloud.



Headquarters

4611 Bee Caves Rd #200
Austin, TX 78746

North American Sales

 +1-512-473-0500
 sales@EagleEyeNetworks.com
www.EagleEyeNetworks.com

European Sales

 +31 20 26 10 469
 EMEAsales@EagleEyeNetworks.com
www.EagleEyeNetworks.com