

# Video Security



## F05Z20NDDC

F1.6/5-100mm DC Lens, 1/3" CS Mount,  
Variable Focal Length

Art-No. 43224




## Features

Suitable for 1/3" and 1/4" Colour and B&W Cameras  
CS Mount  
Variable Focal Length  
20x Focal Length Range

High Standard of Optical and Mechanical Quality  
Without Built-in Auto Iris Amplifier  
4-pin Connector for DC Iris Control  
Adjustable Slip-ring Mount for Cable Positioning

## Specifications

Nominal format size	1/3"
Focal length (f)	5 ~ 100mm
Zoom range	20x
Aperture range (F)	F1.6 ~ F250 (usable filter density)
Iris control system	Galvanometer
Horizontal angle of view at nominal format size	52.7° ~ 2.8°
Minimum object distance (M.O.D.)	W: 0.3m / T: 1.0m
Flange focal length	12.5mm
Screw-in depth	4.0mm
Filter screw size	M46x0.75mm
Slip-ring mount	340° ~ 360° Variable adjustment range
Cable length	Approx. 20cm
4-pin plug	Standard
Lens mount	CS
Temperature range	-20°C ~ +50°C
Dimensions (LxDxH)	See drawing
Weight	190g

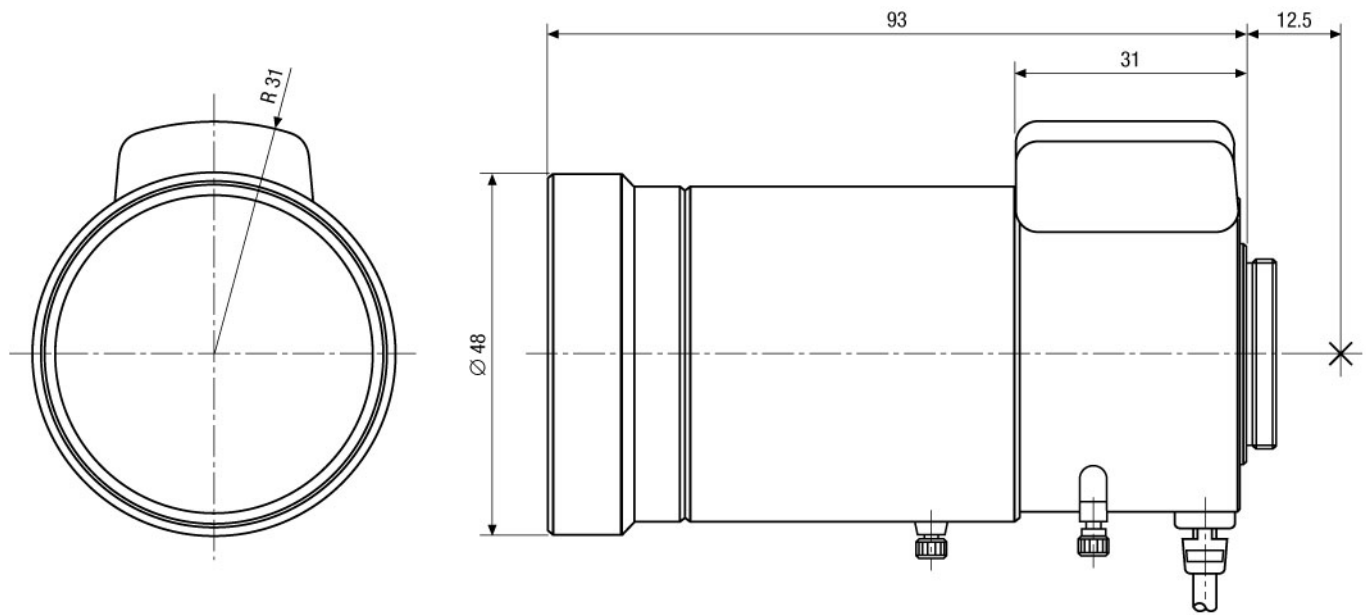

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH  
Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany  
Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100  
info@videortechnical.com · www.videortechnical.com

