



FXC-1302

Article-No.: 92713

1/3" Network Camera,
Day&Night, H.264, MPEG4,
1600x1200, 12VDC, PoE, ONVIF

Mainfeatures

1/3" 2 megapixels CMOS sensor
Simultaneous video streaming (H.264/MJPEG/MPEG-4)
e-PTZ function
Integrated motion detection
Alarm recording (Mini SD, NAS, ISCSI)
Power-over-Ethernet (PoE)

Resolution 1600 x 1200 (HD 720p) max.
Electronic day&night switching
Privacy zone masking
Internal microphone and speaker
ONVIF conformity
Client management software included

Specifications

Series	eneo F
Resolution standard	HD 720p
System	day&night
Sensor size	1/3"
Imager	CMOS
Sensitivity (at 50% video signal)	0,5 Lux
Sensitivity (at 50% video signal)	at F1.2
Digital Noise Reduction (DNR)	no
Low speed shutter	yes
Low speed shutter	1/25sec. ~1/100,000sec.
Backlight compensation	no
Wide Dynamic Range (WDR)	no
IR cut filter	OLPF (Overlay Low Pass Filter)
Motion detector	integrated motion detector
Activity detection	yes
Text display	supplied


Specifications (continued)

Menu languages	English, Chinese
Audio support	yes
Audio	Built-in microphone, speaker
Alarm inputs	-
Alarm outputs	-
Internal storage	Micro SD card, SDHC card, SD card
Digital storage media	Apacer 1GB, Apacer 4GB, 8GB, 16GB, Kingston 1GB, 2GB, Kingston 4GB, 8GB, 16GB, 32GB, ScanDisk 1GB, 2GB, ScanDisk 4GB, 8GB, 32GB, Crucial 1GB, Trancend 4GB, 8GB, 16GB, KINGMAX 4GB, 8GB, 16GB, A-Data 4GB, 16GB
Compression standard	H.264, MJPEG
Resolution max.	1600 x 1200
Resolution	2 megapixels
Image transmission rate max.	30 B./Sek.
Stream types	H.264, MJPEG multiple
Lens type	fixed focal length
Lens mount	CS/C mount
Focal length	4 mm
Digital zoom	no
Serial interfaces	no
Remote configuration	remote software, via web browser
Password protection	yes
PTZ support	yes
Supply voltage	12VDC, PoE (IEEE-802.3af)
Power over Ethernet	yes
Power consumption	3 W
Temperature range (operation)	-10°C ~ +60°C
Colour (housing)	RAL9010
Housing material	plastic
Protection rating	n/a
Integrated wall mount	yes
Hidden cable management	no
Sunshield	no
Window heater	no
Vandalism resistant	no
Management Software Support	Finitra, Zelaris
SDK	available, SDK incl. HTTP-API and ActiveX
ONVIF	core specifications 1.02
Dimensions (HxWxD)	110x70x33 mm
Weight	250 g
Parts supplied	lens, Quick Installation Guide, Manual and Software on CD-ROM, installation CD, screw set, PSU
Certificates	CE

Optional Accessories

Image	Artikel-Nr. / Typ	Description
	FINITRA	Video Management Software, for eneo F-Series
	FNR-4004/500	Network Video Recorder, 4xIP, 1600x1200 (@2 Channels), H.264, 500GB, 12VDC
	FNR-4016/500	Network Video Recorder, 16xIP, 1600x1200 (@4 Channels), H.264, 500GB, 230VAC
	POE20U-560(G)	High PoE Midspan, 1 Port, 19.6W, Gigabit, 100-240VAC
	POE125U-8C	PoE Midspan, 8 Ports, 15.4W, Gigabit, 100-240VAC

Technical Drawing

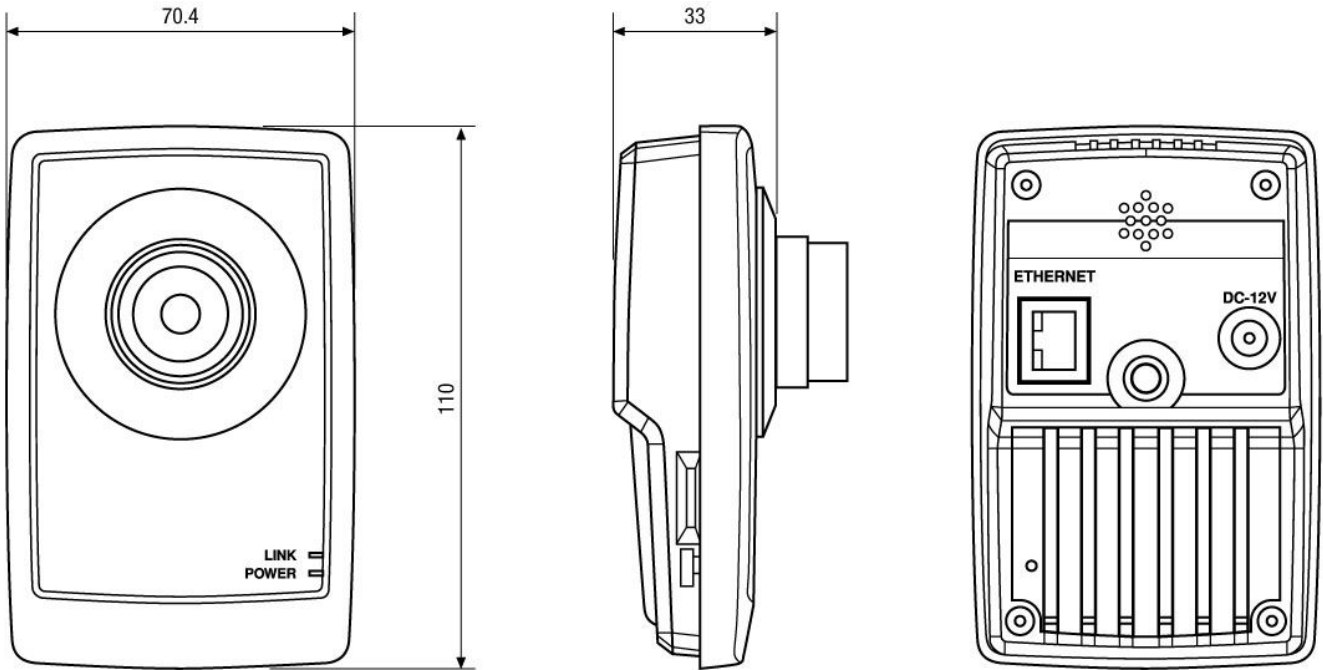

Maße/Dimensions: mm

Your partner for eneo products:

