

Video Security

Housings | eneo Dome Housings

VDW-1T/230V

Dome Outdoor Housing with Heater, Blower
Tinted Bubble, RAL9016, 230VAC

Art-No. 77014



Features

Camera Weatherprotection
For Wall and Pendant Mount
Installation Prepared for Dome and Web Cameras
Easy Camera Installation (Free Access)
Tinted Acryl Bubble

Heater and Blower Kits Supplied
Power Supply: 230VAC
Conduit Cable Protection
Protection Rating: IP66

Specifications

Mounting	Wall & ceiling pendant mount
Camera fixing	Dome cameras: TK-C675BE, TK-C676E, TK-AM200E, TK-C553E (JVC). Available height: 190 mm*) max.
Camera assembling (optional)	WebCameras (adapter kit 77012 required): VN-1/2/3(W)U series (JVC), WebEye dome camera SPD160
Camera mount	On a fixed camera bracket. Assembling accessories for the mentioned cameras are included.
Cable entry	M25 x1.5 mm cable gland with 4 entries for different cable diameters
Heater	Thermostatically controlled PTC heater kit 230 VAC/50 W
Blower	24 VDC/1.6 W
Voltage input	230 VAC / 50 Hz
Output voltage	24 VAC / 38 watts
Protection rating	IP 66
Temperature range	-20°C to +50°C
Housing	2-part aluminium housing with tinted acryl bubble
Colour	RAL 9016
Dimensions (HxWxD)	See drawing
Weight	3.4 kg
Parts supplied	Camera mounting kit, Allan wrench key

VDW-1T/230V

Accessories

77012 / VDW-1/JVC-NETKI

Mounting Kit for Use of JVC Web Cameras in Dome Outdoor Housing VDW

77011 / VDW-1/WM


Wall Mount for Dome Outdoor Housing VDW, RAL9016

77015 / VDW-1/DFP

Ceiling Mount Adapter for VDW-1 Series

Product Information

*) Cameras from other manufacturer upon request

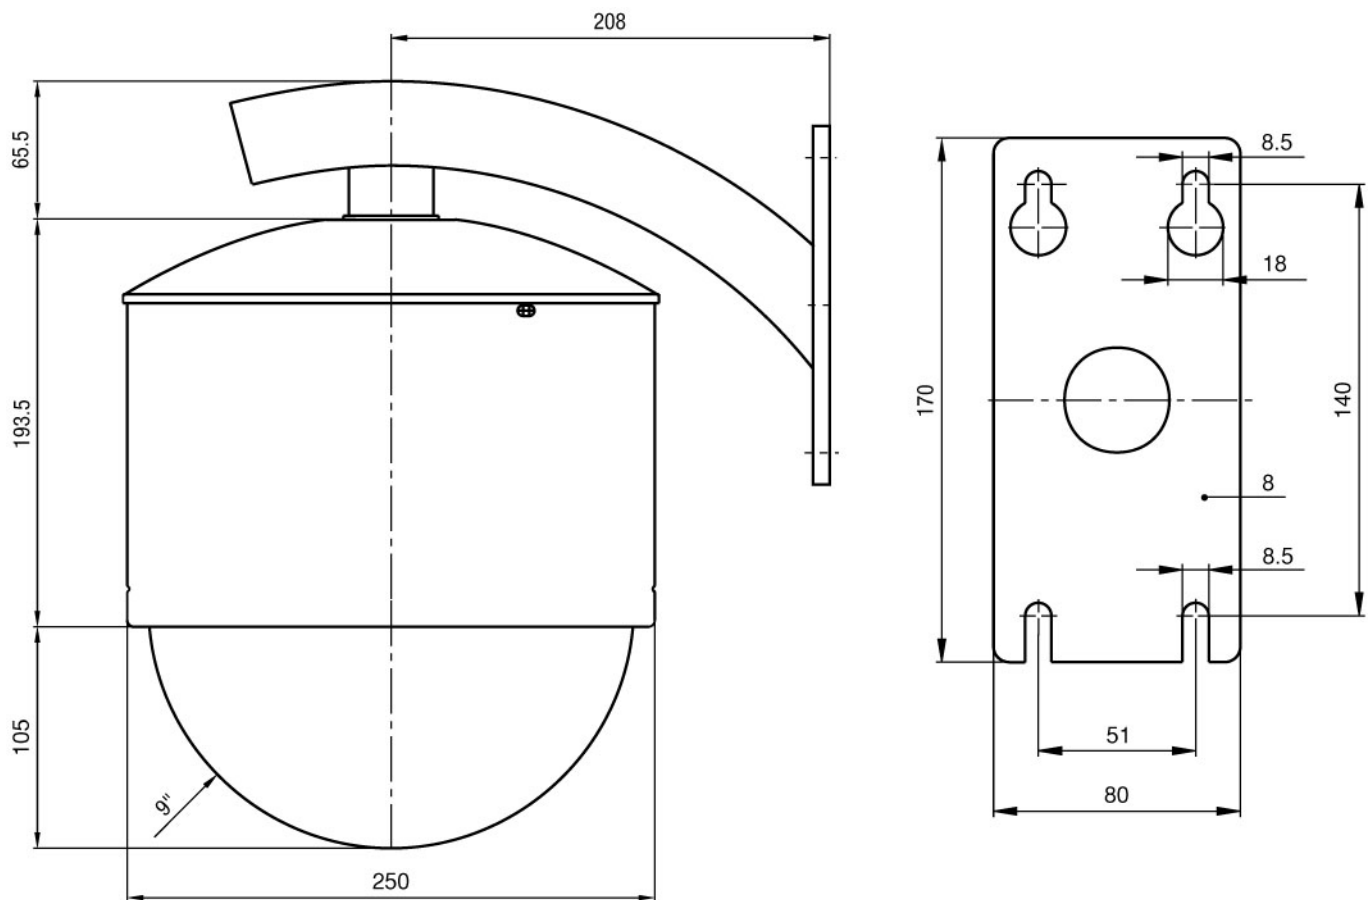

Der Montagearm gehört nicht zum Lieferumfang
The wall bracket is not included

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
info@videortechnical.com · www.videortechnical.com

