

Video Security



VKC-1338/PIR

1/3" Colour Camera with 3.7mm Lens and PIR Sensor, 12VDC, 470TVL

Art-No. 91991



Features

For Wall Mount

Resolution of 470 Horizontal Lines

Built-in Pinhole Lens F2.0/3.7mm

Automatic Gain Control (AGC)

Automatic Shutter Control (AES)

Automatic White Balance (AWB)

Internal Synchronization

PIR Sensor Function

Supply Voltage: 12VDC

Easy Installation

Specifications

Imager	1/3" Sony Super HAD Interline Transfer CCD
Picture elements	Approx. 440,000 (H) 752 x (V) 582
System	CCIR/PAL
Synchronization	Internal
Sensitivity at 50% video signal	5.6Lux at F2.0 / 2.0Lux at F1.2 (VT measurement result)
Horizontal resolution	470 TV lines
Signal-to-noise ratio	48dB (AGC OFF)
Automatic gain control (AGC)	Supplied
Automatic shutter control (AES)	1/50 ~ 1/100,000Sec.
Automatic white balance (AWB)	Supplied
Gamma correction	0.45
Lens	F2.0/3.7mm Pinhole
Horizontal angle of view	68°
External connections	Video (BNC), 12VDC (DC socket)
Video output	1Vp-p, CVBS, 75ohms
Supply voltage	12VDC +/-10%
Power consumption	2.5watts
Temperature range	-10° ~ +50°C
Housing	Plastic


VKC-1338/PIR

(Specifications continued)

Mounting	Wall mount (bracket included)
Colour	Light grey
Dimensions (HxWxD)	See drawing
Weight	125g
Special features	PIR sensor function. NO/NC relay contact output (125VAC/1A, 30VDC/2A resistive), Adjustable switching duration: 2~40Sec. Sensor field angles: 100° horizontal / 45° vertical. Detection range: up-to 10m

Accessories

77779 / VT-PS12DC-UK	Power Supply Unit w. UK Mains plug-in, 100-240VAC/12VDC-1.0A, Regul., open Ends
70447 / VT-PS12DC-5	Plug-in Power Supply Unit 100-240VAC 12VDC (1.0Amp), Regulated, with DC Plug
77772 / VT-PS12DCDT	PSU 12VDC/0,5A, Regulated, Desktop Version, 1.8m Cable each w. open ends

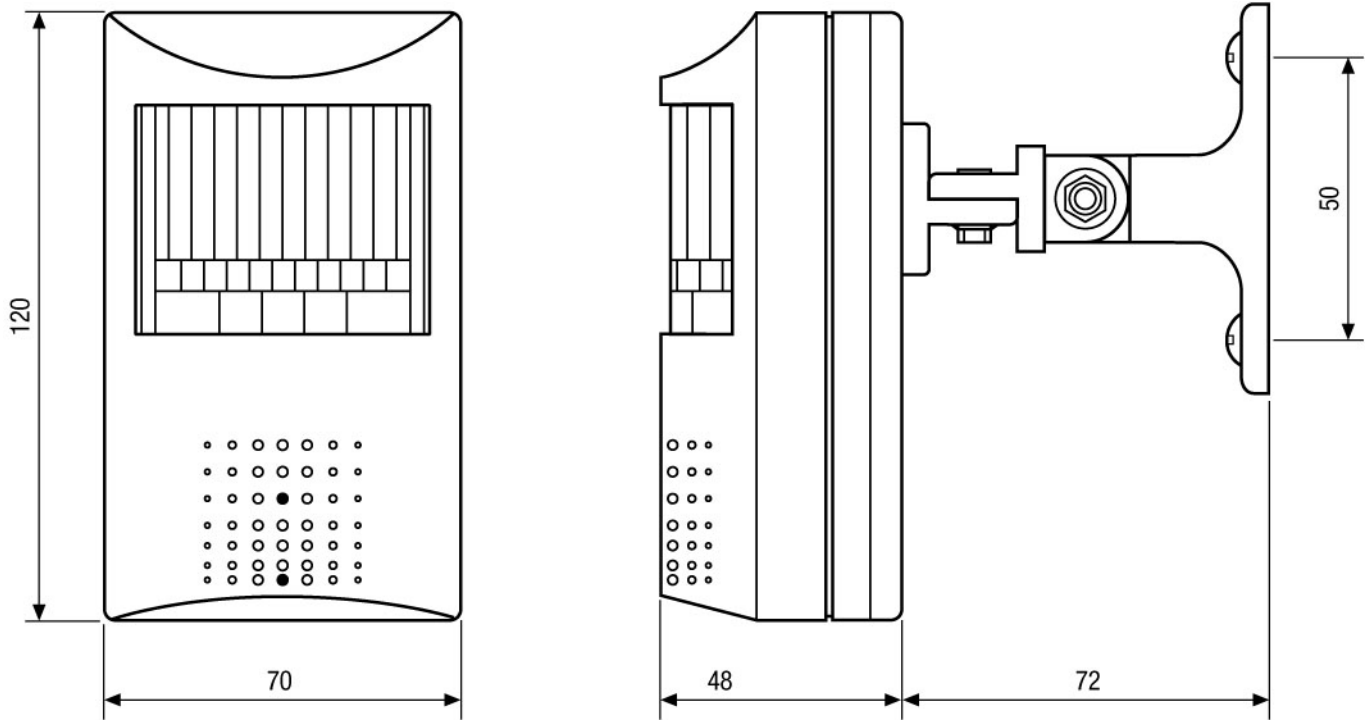

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com