

## Multiplexers & Matrix Switchers

FDP-No.: 75106

### VKR-KB2

- Operation of VKR-16/4 a. VKR-32/8 Matrix Switchers
- Fixed or Variable Speed Control
- Camera and Monitor Call-Up
- Programmable Sequences/Salvos and Tours
- LCD Display
- Addressable
- RS-485 Serial Interface
- Supply Voltage: 12 VDC



---

### Specifications:

---


Control functions	Selection of camera and monitors, sequences, salvos, tours, presets, 8 aux functions, alarm reset
LCD display	Displays selected cameras/monitors and status
LED display	Setup ON, VCR record
Site Control	Fixed or variable speed control of pan/tilt, up/down, zoom. Fixed speed control of focus and iris
Serial interface	RS-485 (9-pin)
Supply voltage	12 VDC*)
Power consumption	3.6 W max.
Housing	Steel metal
Colour	Pantone Coolgray 1C
Dimensions (HxWxD)	See drawing
Temperature range	0°C to +50°C
Weight	1.0 kg

### Additional descriptions

\*) For direct connection to the VKR-16/4 and VKR-32/8 matrix switcher control systems, no separate power supply is necessary (up-to 10 m distance, evtly. use the connection kit VKR-KBAK1). For longer distances and/or daisy-chained installation of keyboards, the connection kits VKR-KBAK1 and VKR-KBAK2 must be used.

Accessories	
EDP No. / Type	Description
75107 VKR-KBAK1	Connection kit for VKR matrix switcher keyboards, 230 V PSU
75108 VKR-KBAK2	Connection kit for local VKR matrix switcher keyboards

Zubehör von	
EDP No. / Type	Description
75103 VKR-16/4	Matrix switcher control system with time/date/text on-screen display, for desktop and 19" installation
75104 VKR-32/8	Matrix switcher control system with time/date/text on-screen display, for desktop and 19" installation

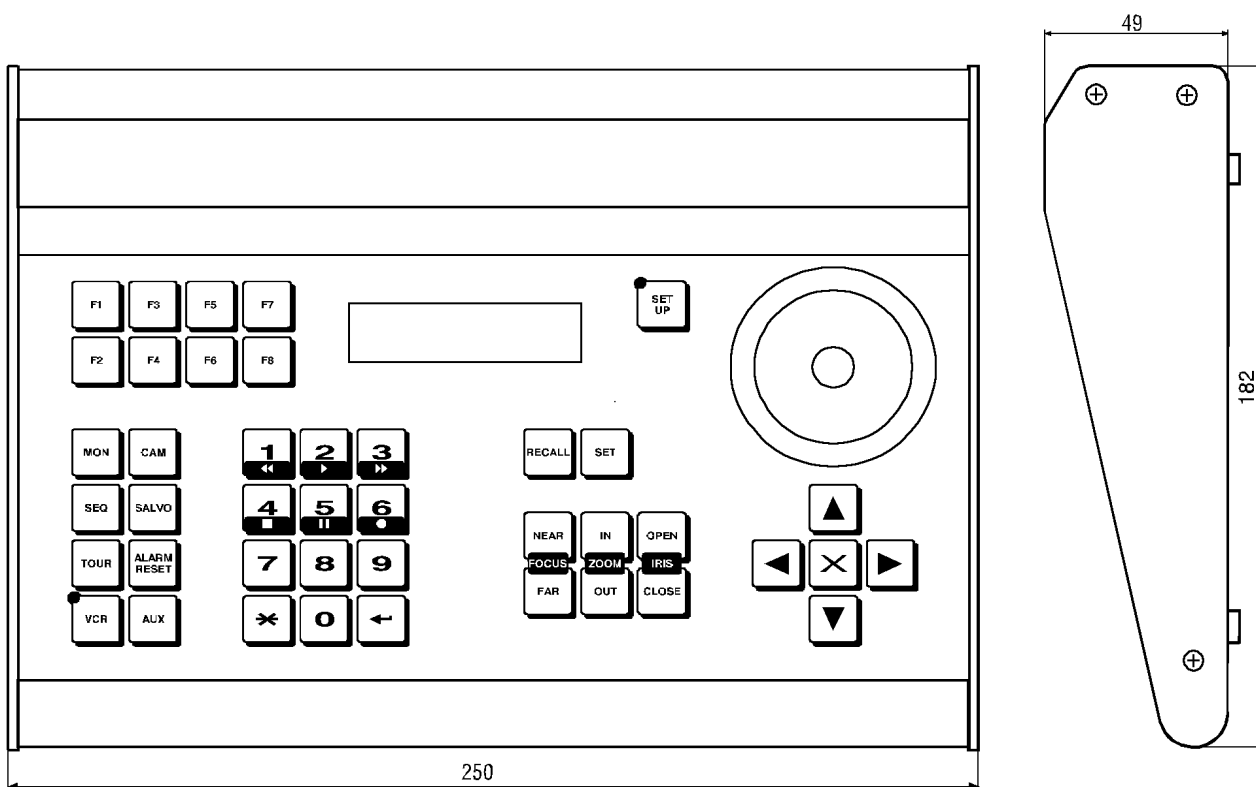

Maße/Dimensions: mm

e-mail: [info@eneo-security.com](mailto:info@eneo-security.com) • [www.eneo-security.com](http://www.eneo-security.com)