

Video Security

Monitors | eneo TFT/LCD Monitors

VMC-32LCD-PW

32" Prof. 16:9 TFT Colour Monitor,
4x CVBS, Y/C, RGB, 2x Audio, 100-240VAC

Art-No. 90467



Features

Professional LCD/TFT Monitor for PC and Security
32" Display Screen Size f. 16:9(4:3) Image Display
Built-in 4-channel Real Time Multiplexer
Switchable PAL/NTSC Selection/Integr. Loudspeakers
Full and Multi Screen Display/2x Digital Zoom
Integrated Memory Function for up to 60 Images

Multiple Language On-screen Menu Driven Set-up
Resolution of 1280x768 Pixels
4x CVBS Inputs, S-Video, VGA, Alarm, Audio Inputs
Quick Signal Switching
Supply Voltage: 100 to 240VAC, 50/60Hz
Rugged Metal Cabinet

Specifications

Video standard	PAL/NTSC
Display element	Colour TFT/LCD
Screen size	32" (81,3 cm)
Active display area (H/V)	697.7x392.2mm
Pixel format	1366 (H) x 768 (V), RGB vertical stripes 0.51x0.51mm
Pixel fault class	ISO 13406-2, Class II
Screen formats	16:9, 4:3
Scanning method	Digital progressive scan (Frame/Motion mode)
Colour scales	16.7Mio (8bit)
Contrast ratio typical	500:1
Brightness typical	500cd/m ²
Viewing angle top	88°
Viewing angle right	88°
Viewing angle bottom	88°
Viewing angle left	88°
Light source	20EEFL
Response time typical	18ms

VMC-32LCD-PW

(Specifications continued)

PC interfaces	VGA, Analog RGB (0.714Vp-p, 75ohms), H & V sync. (TTL), 15-pin D-Sub
Video inputs (type)	CVBS, Y/C, RGB
Video inputs	4x CVBS: 1Vp-p, 75ohms, BNC Y/C: Y= 0.7Vp-p, C= 0.3Vp-p, 75ohms, 4-pin MiniDIN. Loop-through inputs, automatic 75ohms termination
Video outputs	3x 1Vp-p, CVBS, 75ohms, BNC (Monitor, Record, Spot)
Component video input	1x 1Vp-p, 75ohms, 3x Cinch (1080i, 720p, 480p, 480i YPbPr)
Audio inputs	2, 2x Cinch (Stereo)
Audio output power	2x 2.5watts
Alarm input	1x NO/NC selectable
Alarm output	1x NO/NC contact
Menu languages	English, German, French, Spanish, Italian, Polish
Supply voltage	100V ~ 240VAC, 50/60Hz
Power consumption	160watts
Multiplexer	Built-in 4-ch. real time multiplexer
Digital Zoom	2x
Recording	Up to 60 still images
External adjustments	On-screen control, Input selection, Multiplexer control, Digital Zoom, Recording and playback, Alarm reset, ON/OFF
Remote control	Wireless remote control enabled
Password protection	Key lock and menu password enabled
Temperature range (Operation)	0 ~ +40°C
Housing material	metal
Colour (housing)	silver
Dimensions (HxWxD)	See drawing
Mount	VESA standard (4 threads M4, 100x100mm)
Weight	18.5kg
Parts supplied	Power cord, VGA cable, IR remote control unit, Driver Diskette, Manual
Certificates	FCC
Options	Wall mount bracket / Table stand

Accessories


90464 / LCD-ST/PW	Desktop Mount for LCD/Plasma Monitors >30", PW(A) Series, Aluminium Finish
90448 / VMC-LCD/WMB-3	Wall Mount Bracket, Pan and Tilttable for LCD Monitors
90485 / VMC-LCD/CMB-2	Ceiling Mount Bracket, Pan and Tilttable for LCD Monitors from 23"

Accessories of

71979 / DLR1-04N/250V	Digital Video Recorder (4-Channel) 250GB HDD, Alarm In/Outputs, Ethernet
------------------------------	--

(Accessories of continued)

71978 / DLR1-04N/160V	Digital Video Recorder (4-Channel) 160GB HDD, Alarm In/Outputs, Ethernet
71931 / DLR2-04N/160	Digital Video Recorder (4-Channel) 160GB Hard Disk, Alarm Input, Ethernet
71932 / DLR2-04N/320	Digital Video Recorder (4-Channel) 320GB Hard Disk, Alarm Input, Ethernet
71933 / DLR2-04N/480	Digital Video Recorder (4-Channel) 480GB Hard Disk, Alarm Input, Ethernet

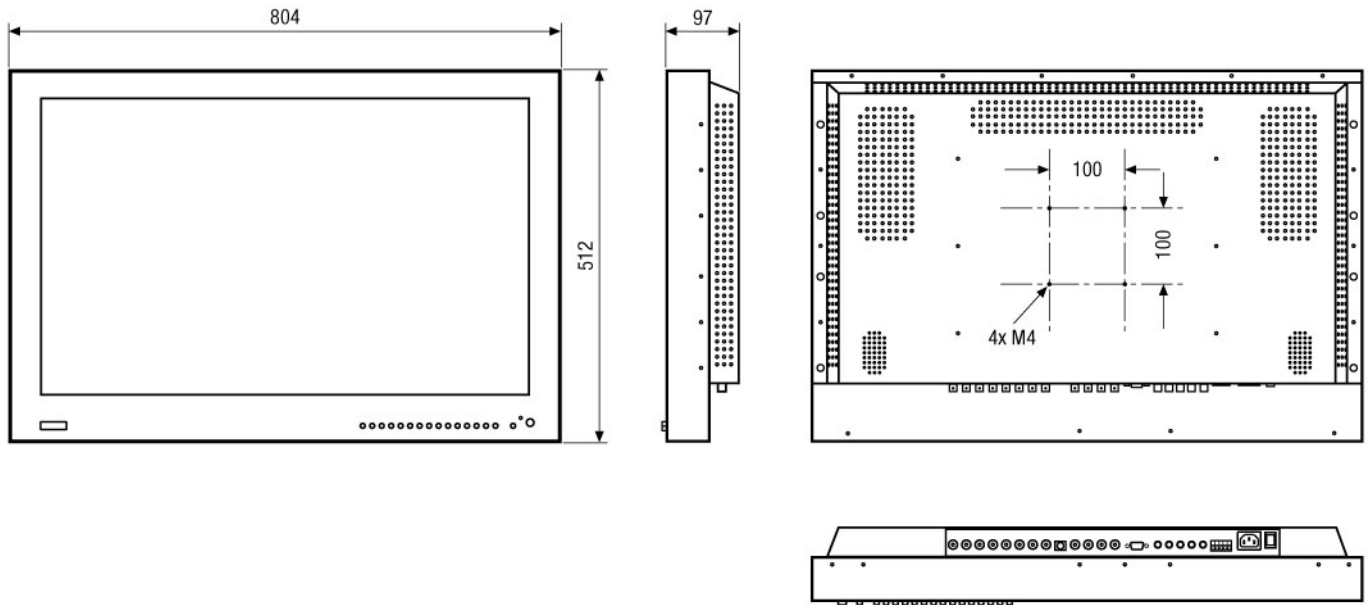

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100
 info@videortechnical.com · www.videortechnical.com

