

# Video Security



**WFL-II/LED15-12**  
LED-Infrared Illuminator 950nm,  
Wide Flood, 15W, 12VDC  
**Art-No. 73826**



## Features

**Power Rating: 15 W**  
**Spectral Emission: 950 nm**  
**Narrow-band Light Emission**  
**Beam Angle: 40°**

**Protection Rating: IP66**  
**Vibration-resistant**  
**Low Self-heating**  
**No Maintenance Required**

## Specifications

<b>Spectral emission</b>	950nm
<b>Spectral half-value range</b>	80nm
<b>Scene coverage</b>	Approx. 15m
<b>75% reduced light emission after</b>	>100,000h
<b>Heating above ambient air temperature</b>	Max. 35°C
<b>Supply voltage</b>	12VDC +/- 0.5V
<b>Current consumption</b>	Approx. 1.25A
<b>Power consumption at nominal voltage</b>	Approx. 15W
<b>Protection rating</b>	IP66
<b>Housing</b>	Aluminium with plastic cover
<b>Temperature range</b>	-30°C to +50°C
<b>Dimensions (HxWxD)</b>	66x66x55 mm
<b>Weight</b>	350g

## Accessories

<b>73827 / NE-109N</b>	Power Supply 110-240VAC/12VDC for one LED-Infrared Illuminator 15W, Regulated
<b>70023 / WD-9N</b>	Wall Mount with Ball Joint, 1/4" Camera Fixing Screw, Black Finish

(Accessories continued)

73433 / DS-3


Twilight Switch with ON/OFF Delay adjustable Switching Points, 230VAC

71310 / WD-8/MK

Wall Mount with Swivel Head, 1/4" Camera Fixing Screw, Black Finish

### Product Information

The best result will be achieved on condition that a camera is used with good sensitivity in the infra-red range, a relative lens aperture of F1.4 min. and a mean reflectance factor for spotlight objects.

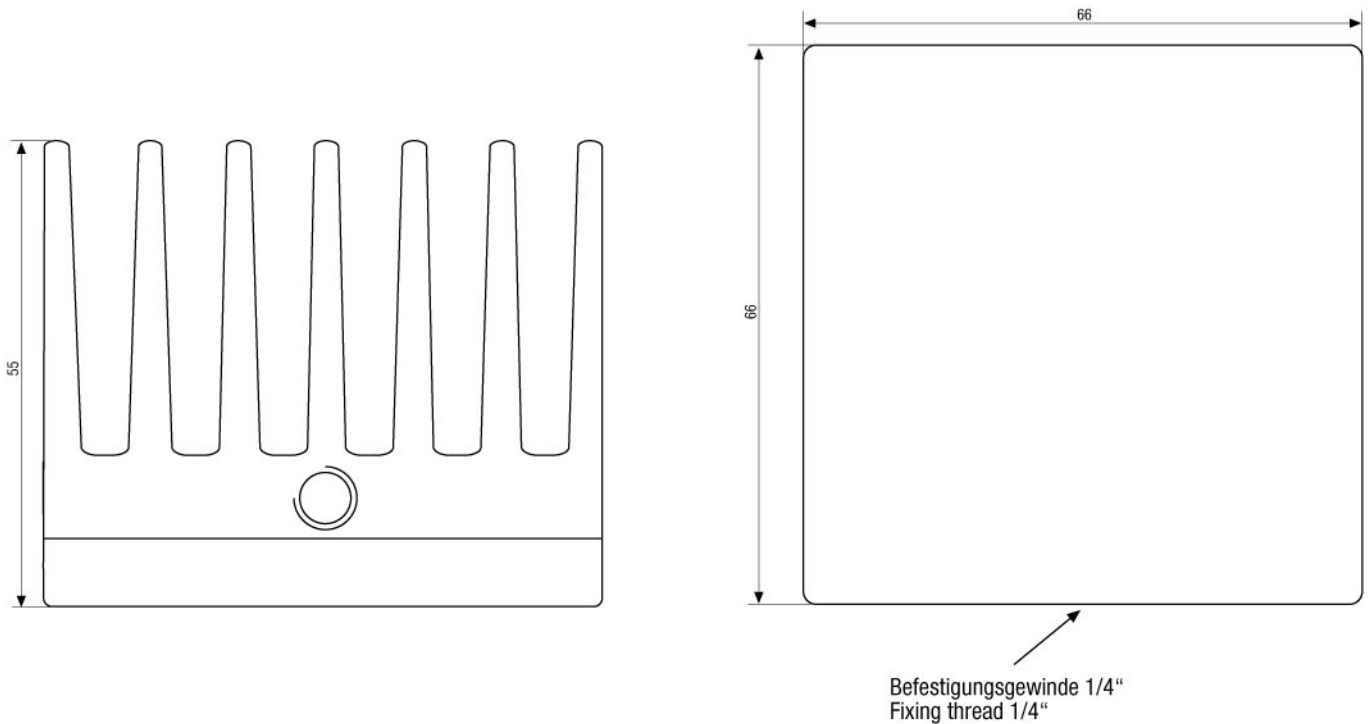

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH  
Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany  
Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100  
info@videortechnical.com · www.videortechnical.com

