



DUAL TEC®... THE BEST OF BOTH WORLDS

By combining microwave and PIR technologies, Honeywell's DUAL TEC® sensors offer you the best of both worlds superior detection and fewer false alarms.

Imagine never having to compromise between performance and false alarm prevention again.

More dealers are choosing Honeywell's DUAL TEC® sensors for this very reason.

The winning combination of microwave and PIR technologies enable the sensors to actually distinguish between real intruders and other environmental conditions.

For an alarm to occur with a DUAL TEC®, both the PIR and the microwave sensor must "confirm" each other and detect an intruder within the defined protection area. The result? Optimum performance and minimal false alarms.

Honeywell offers a wide range of DUAL TEC®s including sensors that provide up to 100 lbs. of pet immunity; wall, ceiling or flush mount versions and anti-masking devices for high security applications.

There is a DUAL TEC® to suit any application, from residential and commercial to the most robust industrial environments.

INTELLISENSE PIRs



IS-215T

Passive Infra Red Motion Sensor

- Compact size
- Look-down zone
- Power requirements : 8,5~15,4V DC, 16mA @ 12VDC
- Tamper switch
- Dimensions : 86x60x38mm (h x w x d)
- Range : 12m x 12 m
- EN50131-1, Environmental Class II, Security Grade 2, type B.



IS-215TCE

Passive Infra Red Motion Sensor

- Compact size
- Look-down zone
- Power requirements : 8,5~15,4V DC, 16mA @ 12VDC
- Tamper switch
- Dimensions : 86x60x38mm (h x w x d)
- Range : 12m x 12 m
- Dual-slope temperature compensation
- EN50131-1 Security Grade 2, Environmental Class II.




IS-215TQ

Passive Infra Red Quad Element Motion Sensor

- Compact size
- Look-down zone
- Power requirements : 8,5~15,4V DC, 16mA @ 12VDC
- Tamper switch
- Dimensions : 86x60x38mm (h x w x d)
- Range : 12m x 12 m
- EN50131-1, Environmental Class II, Security Grade 2, type B.

TOP VIEW
Wide Angle Lens

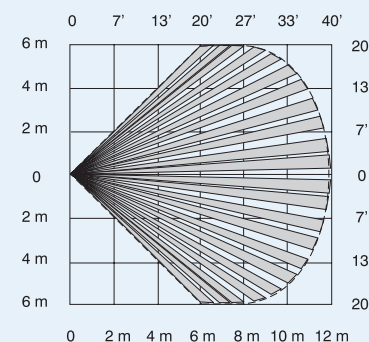

SIDE VIEW
Wide Angle Lens

