



ED 560 T – 1/3" vandal-proof outdoor day/night dome camera, automatic IR cut filter

Features

- Vandal-proof IP66 outdoor housing
- Super-high resolution technology (530 / 560 TV lines)
- Built-in DNR (dynamic noise reduction)
- Day/night function with automatically swiveling IR cut filter
- Advanced 16-bit digital signal processor (DSP)
- On-screen programming
- 4 adjustable privacy zones
- High infrared sensitivity
- Optional wall bracket

Technical data	
Sensor	1/3" SONY Super HAD CCD
Picture element	752 (H) x 582 (V)
Horizontal resolution	530 TV lines (colour) / 560 TV lines (b/w)
Sensitivity	0,002 lux (sens-up x128), 0,25 lux / F = 1.2
S/N ratio	> 50 dB (AGC off)
Gamma correction	0,45
OSD	Yes
Day/night control	Automatically swiveling IR cut filter and enhanced b/w sensitivity
IR cut filter control	Automatic by internal light sensor
Lens	2,9 ~ 10 mm direct drive (DC), IR-corrected, ED glass, auto IR cut filter
Shutter selection	Automatic / manual / flickerless
Back light compensation	Off / low / middle / high
Colour temperature BIAS	Adjustable
White balance	ATW (2500~8300°K) / AWC / manual
AGC	Off / low / middle / high
DNR (dynamic noise reduction)	Off / low / middle / high
Digital slow shutter	Off / auto: x2 ~ x128 selectable
Camera ID	On / off
Privacy zones	On / off (4 zones, position / size / tone)
Sharpness	On / off (adjustable level)
Horizontal mirror	On / off
Video output	BNC VBX, 1,0 Vp-p, 75 Ohm
Synchronisation	internal
Weatherproof rating	IP 66
Power source	12 V DC / 24 V AC
Power consumption	310 mA at 12 V DC, 300 mA at 24 V AC
Ambient temperature	-10°C ~ +50°C
Dimensions (diameter x H)	123 x 107,8 mm
Weight	740 g

ED560_db_en_rev01

Accessories

ED WMA – wall mount bracket

Material: aluminium

Dimensions (WxHxD): 150 x 110 x 170 mm


Weight: 600 g

Max. load: 4 kg

Application: with ED 560 T and EDN 800 T



Dimensions

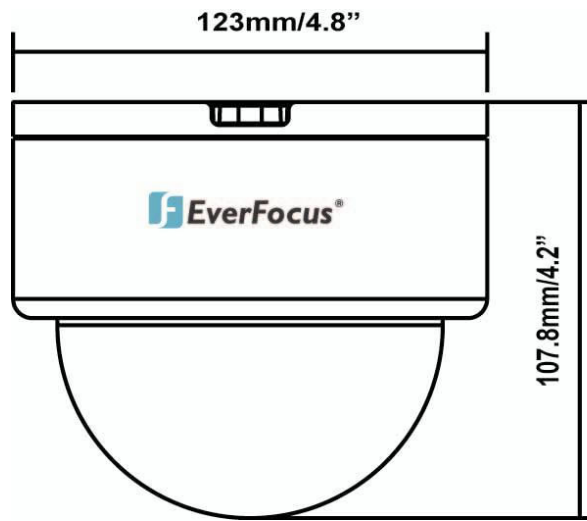

Ordering information

ED 560 T / P	1/3" vandal-proof outdoor day/night camera, 530/560 TV lines, IP66, 2,9~10mm DC lens, automatic IR cut filter, 12 V DC / 24 V AC
ED WMA	Wall mount bracket for ED 560 T and EDN 800 T, aluminium, dimensions (WxHxD): 150x110x170 mm