


## D32x10HR4D Series / D32x15.6HR4D Series

Applicable camera (model) **1** **2/3** **1/2** **1/3** **1/4**

**32x**

Applicable to **1/2**

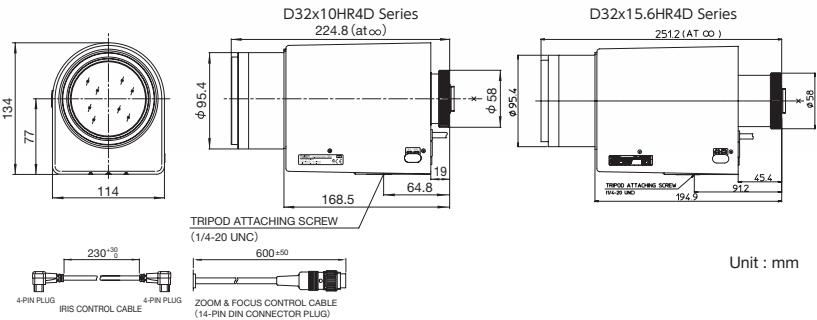

Unit : mm



\*Photograph of the D32x10HR4D model

Zoom Motor Drive Wide Angle Telephoto Long Focal Switchable Iris-Remote C Mount Metal Mount Potentiometer ND Filter RoHS Compliant  
**ZOOM MOTOR DRIVE WIDE TELE DC VIDEO IRIS-REMOTE C-mt METAL PRESET ND RoHS**

		Applicable to <b>1/2</b>	D32x10HR4D-VX1	Applicable to <b>1/2</b>	D32x15.6HR4D-VX1
Focal Length (mm)			10 - 320(32x)		15.6 - 500(32x)
Iris Range			F2.5 - T1500 (Equivalent to F1500)		F3.9 - T1500 (Equivalent to F1500)
Operation		Zoom	Motor Drive		
		Focus	Motor Drive		
		Iris	Switchable Iris Mode DC Mode : Auto*1 / Video Mode : Auto or Remote*1*2		
Angle of View (H×V)	1/2"	WIDE	35° 29' × 26° 59'		23° 11' × 17° 30'
		TELE	1° 09' × 0° 52'		0° 44' × 0° 33'
	1/3"	WIDE	26° 59' × 20° 24'		17° 30' × 13° 10'
		TELE	0° 52' × 0° 39'		0° 33' × 0° 25'
Angle of View (H×V) (16:9)	1/2"	WIDE	36° 45' × 21° 29'		24° 41' × 14° 04'
		TELE	1° 14' × 0° 42'		0° 49' × 0° 27'
	1/3"	WIDE	28° 16' × 16° 13'		18° 41' × 10° 35'
		TELE	0° 56' × 0° 32'		0° 37' × 0° 21'
Focus Range (From the Lens Front) (m)			∞ - 3		
Object Dimensions at M.O.D. (H × V) (4:3) (mm)	1/2"	WIDE	1746 × 1310		1179 × 884
		TELE	57 × 43		37 × 28
	1/3"	WIDE	1310 × 982		884 × 663
		TELE	43 × 32		28 × 21
Object Dimensions at M.O.D. (H × V) (16:9) (mm)	1/2"	WIDE	1891 × 1087		1253 × 709
		TELE	62 × 35		41 × 23
	1/3"	WIDE	1440 × 818		944 × 532
		TELE	47 × 26		31 × 17
Back Focal Distance (in air) (mm)			22.70		44.92
Exit Pupil Position (From Image Plane) (mm)			-53		-75
Filter Thread (mm)			M82 × 0.75		M82 × 0.75
Mass (kg)			2.5		2.7
Wiring Diagram			P25		

\* 1 : The iris automatically closes when the camera is turned off.

\* 2 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 27).