



For Security
Vari-Focal

Applicable camera (model)

YV2.7×2.9LA-2

1	2/3	1/2	1/3	1/4

VARI
Vari-Focal

WIDE
Wide Angle

MANUAL
Manual Iris

CS-mt
CS Mount

METAL
Metal Mount


AT
Aspherical Lens

F0.95
Wide Aperture
Rate

2.7×



- Unparalleled brightness at the maximum aperture of F0.95, optimizing the performance at low lighting intensity
- Super wide angle spec, WIDE2.9mm, achieving the horizontal field angle of 93 degrees (when used on 1/3 cameras)
- Compact and lightweight design, best suited for the use with dome cameras
- High accuracy aspheric lens adopted, achieving the high quality image

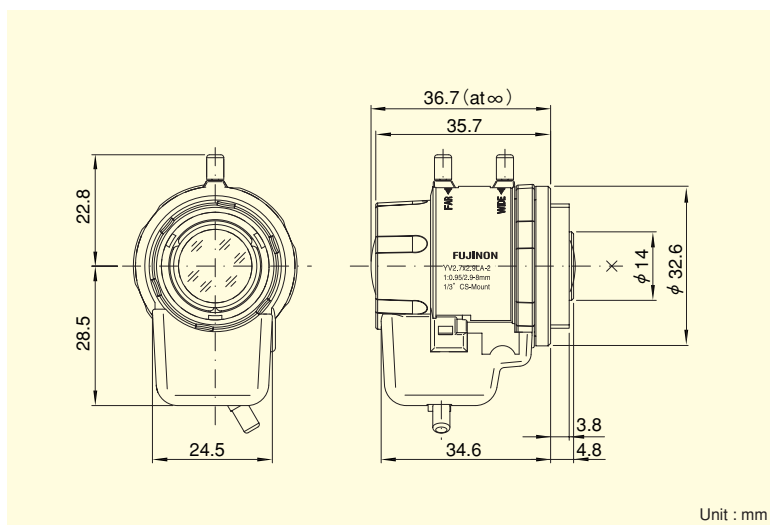

Focal Length (mm)			2.9~8 (2.7×
Iris Range			F0.95 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/3"	WIDE	93°34′ × 68°46′
		TELE	34°53′ × 26°09′
	1/4"	WIDE	68°42′ × 51°12′
		TELE	26°06′ × 19°36′
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	650 × 422
		TELE	194 × 143
	1/4"	WIDE	488 × 317
		TELE	146 × 107
Back Focal Distance (in air) (mm)			7.7
Exit Pupil Position (From Image Plane) (mm)			62
Filter Thread (mm)			—
Mount			CS
Mass (g)			35
Remarks		•Metal Mount	