


### YV3.3x15SR4A-SA2

NEW

3.3 x Applicable to 1/2.7

Applicable camera (model) 1 2/3 1/2.7 1/3 1/4

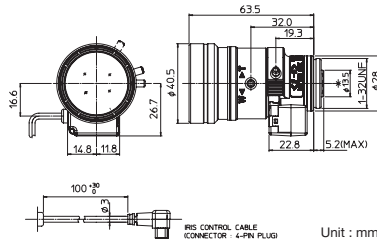


Unit : mm

Vari-Focal **VARI** Telephoto Long Focal **TELE** DC Auto Iris **DC** CS Mount **CS-mt** Metal Mount **METAL** ND Filter **ND** Long Cable **C230** Aspherical Lens **AT** Large Aperture Ratio **F1.5** RoHS Compliant **RoHS** **HD 3MP**

### DV3.8x4SR4A-SA1

3.8 x Applicable to 1/1.8

Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4

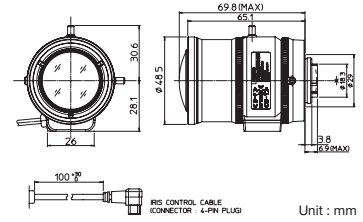

Unit : mm


Vari-Focal **VARI** Wide Angle **WIDE** DC Auto Iris **DC** C Mount **C-mt** Metal Mount **METAL** ND Filter **ND** Long Cable **C230** Aspherical Lens **AT** Large Aperture Ratio **F1.5** RoHS Compliant **RoHS** **HD 3MP**

### DV4x12.5SR4A-SA1

NEW

4 x Applicable to 1/1.8

Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4

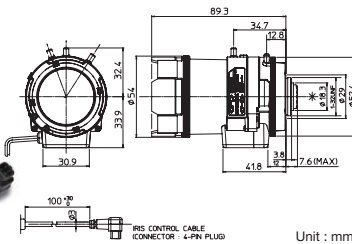


Unit : mm

Vari-Focal **VARI** Telephoto Long Focal **TELE** DC Auto Iris **DC** C Mount **C-mt** Metal Mount **METAL** ND Filter **ND** Long Cable **C230** Aspherical Lens **AT** Large Aperture Ratio **F1.6** RoHS Compliant **RoHS** **HD 5MP**

### DV10x8SR4A-SA1

10 x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

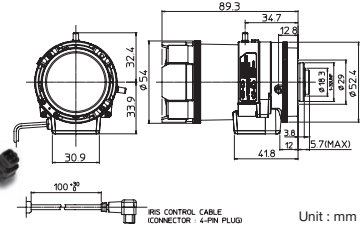

Unit : mm

Vari-Focal **VARI** Telephoto Long Focal **TELE** DC Auto Iris **DC** C Mount **C-mt** Metal Mount **METAL** ND Filter **ND** Long Cable **C230** Aspherical Lens **AT** Large Aperture Ratio **F1.6** RoHS Compliant **RoHS** **HD 3MP**

		Applicable to 1/2.7		Applicable to 1/1.8		Applicable to 1/1.8		Applicable to 1/2	
		YV3.3x15SR4A-SA2		DV3.8x4SR4A-SA1		DV4x12.5SR4A-SA1		DV10x8SR4A-SA1	
Focal Length (mm)		15 - 50 (3.3x)		4 - 15.2 (3.8x)		12.5 - 50 (4x)		8 - 80 (10x)	
Iris Range		F1.5 - T360		F1.5 - T360		F1.6 - T360		F1.6 - T360 (Equivalent to F360)	
Operation	Zoom	Manual							
	Focus	Manual							
		Auto (DC type)*1							
Angle of View (H × V)	1/1.8"	WIDE	—	103° 27' × 77° 03'	32° 54' × 24° 37'	—	—	—	—
		TELE	—	27° 23' × 20° 34'	8° 14' × 6° 13'	—	—	—	—
	1/2"	WIDE	20° 1' × 15° 5' *2	92° 42' × 69° 08'	29° 32' × 22° 7'	44° 33' × 34° 58'	—	—	—
		TELE	6° 9' × 4° 39' *2	24° 38' × 18° 29'	7° 26' × 5° 36'	4° 42' × 3° 32'	—	—	—
	1/3"	WIDE	18° 14' × 13° 43'	69° 08' × 51° 40'	22° 7' × 16° 34'	34° 58' × 26° 35'	—	—	—
		TELE	5° 37' × 4° 14'	18° 29' × 13° 53'	5° 36' × 4° 12'	3° 32' × 2° 39'	—	—	—
	1/4"	WIDE	13° 43' × 10° 18'	51° 40' × 38° 41'	—	22° 40' × 17° 06'	—	—	—
		TELE	4° 14' × 3° 11'	13° 53' × 10° 25'	—	2° 22' × 1° 47'	—	—	—
Angle of View (H × V) Aspect Ratio 16:9	1/1.8"	WIDE	—	113° 02' × 62° 46'	35° 52' × 20° 6'	—	—	—	—
		TELE	—	29° 48' × 16° 49'	8° 57' × 5° 5'	—	—	—	—
	1/2"	WIDE	21° 45' × 12° 20' *2	101° 14' × 56° 21'	32° 12' × 18° 3'	49° 39' × 29° 10'	—	—	—
		TELE	6° 41' × 3° 49' *2	26° 49' × 15° 07'	8° 4' × 4° 35'	5° 07' × 2° 53'	—	—	—
	1/3"	WIDE	19° 49' × 11° 14'	75° 25' × 42° 09'	24° 6' × 13° 32'	38° 16' × 22° 05'	—	—	—
		TELE	6° 6' × 3° 28'	20° 08' × 11° 21'	6° 5' × 3° 27'	3° 50' × 2° 09'	—	—	—
	1/4"	WIDE	14° 56' × 8° 26'	56° 21' × 31° 34'	—	24° 42' × 14° 03'	—	—	—
		TELE	4° 36' × 2° 36'	15° 07' × 8° 31'	—	2° 35' × 1° 27'	—	—	—
Focus Range (From the Lens Front) (m)		∞ - 1.0		∞ - 0.3		∞ - 0.8		∞ - 1.5	
Mass (g)		80		120		175		180	

\*1: The iris automatically closes when the camera is turned off.  
 \*2: Angle of view values for the 1/2.7 model.  
 ※ Each of the above products is also available in manual type.  
 ※ Each of the above products is also available in long cable type (230 mm).