


HD Vari-Focal Day&Night Lens

Day
Night

YV2.1x2.8SR4A-SA2

2.1x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

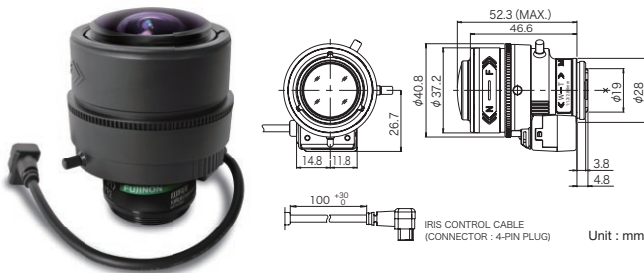

Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE DC CS-mt METAL ND 230 AT F1.3 RoHS


HD
3MP

YV2.7x2.2SR4A-SA2

2.7x

Applicable to 1/2.7

Applicable camera (model) 1 2/3 1/2 1/2.7 1/3 1/4

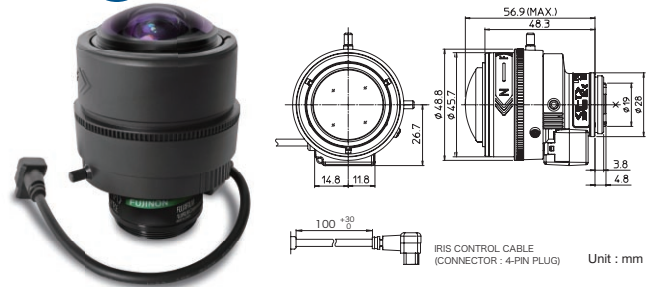

Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE DC CS-mt METAL ND 230 AT F1.3 RoHS


HD
3MP

YV2.8x2.8SR4A-SA2

2.8x

Applicable to 1/2.7

Applicable camera (model) 1 2/3 1/2 1/2.7 1/3 1/4

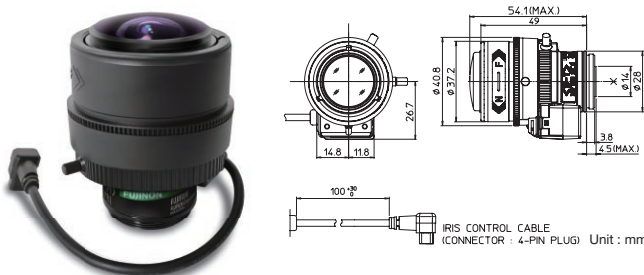

Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE DC CS-mt METAL ND 230 AT F1.3 RoHS

HD
3MP

YV3x6SR4A-SA2

NEW

3x

Applicable to 1/2.7

Applicable camera (model) 1 2/3 1/2 1/2.7 1/3 1/4



Vari-Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI DC CS-mt METAL ND 230 AT F1.4 RoHS

HD
3MP

	Applicable to 1/3		Applicable to 1/2.7		Applicable to 1/2.7		Applicable to 1/2.7	
	YV2.1x2.8SR4A-SA2		YV2.7x2.2SR4A-SA2		YV2.8x2.8SR4A-SA2		YV3x6SR4A-SA2	
Focal Length (mm)	2.8 - 6 (2.1x)		2.2 - 6 (2.7x)		2.8 - 8 (2.8x)		6 - 18 (3x)	
Iris Range	F1.3 - T360 (Equivalent to F360)				F1.3 - T360		F1.4 - T360	
Operation	Zoom				Manual			
	Focus				Manual			
	Iris				Auto (DC type)*1			
Angle of View (H × V)	1/2.7"	WIDE	132° 47' × 100° 19'		112° 24' × 81° 16'		51° 5' × 37° 50'	
		TELE	50° 26' × 37° 54'		38° 48' × 29° 05'		16° 60' × 12° 45'	
	1/3"	WIDE	101° 11' × 74° 10'		100° 34' × 73° 22'		46° 13' × 34° 18'	
		TELE	46° 58' × 35° 09'		45° 51' × 34° 28'		35° 16' × 26° 26'	
	1/4"	WIDE	74° 10' × 54° 58'		91° 20' × 68° 43'		73° 22' × 54° 18'	
		TELE	35° 09' × 26° 19'		34° 28' × 25° 53'		26° 26' × 19° 49'	
Angle of View (H × V) Aspect Ratio 16:9	1/2.7"	WIDE	144° 08' × 82° 08'		124° 51' × 65° 26'		55° 56' × 30° 48'	
		TELE	54° 48' × 30° 57'		42° 17' × 23° 43'		18° 30' × 10° 26'	
	1/3"	WIDE	111° 25' × 60° 03'		131° 34' × 74° 46'		111° 8' × 59° 19'	
		TELE	51° 13' × 28° 41'		49° 55' × 28° 11'		38° 27' × 21° 35'	
	1/4"	WIDE	81° 14' × 44° 41'		99° 19' × 56° 19'		80° 23' × 44° 13'	
		TELE	38° 18' × 21° 30'		37° 31' × 21° 12'		28° 47' × 16° 13'	
Focus Range (From the Lens Front) (m)					∞ - 0.3			
Mass (g)	55		75		60		95	

* 1: The iris automatically closes when the camera is turned off.
 ※ Each of the above products is also available in a manual type.
 ※ Each of the above products is also available in a long cable type (230 mm).