




COVERT CAMERA

COLOUR

BF-650/PA

● **Box file colour camera**

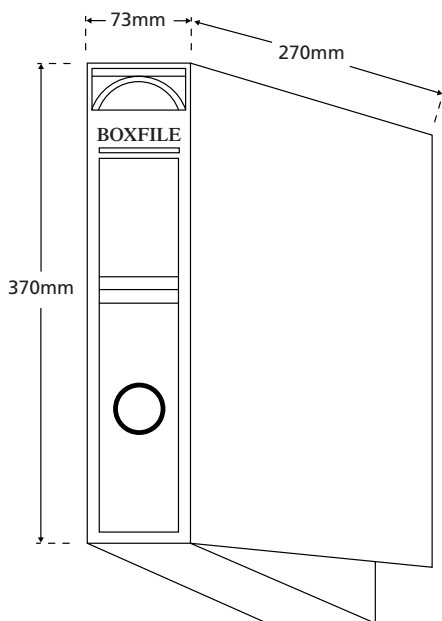

270mm(W) X 370mm(H) X 73mm(D)

- **Ideal for use in an office environment**
- **Camera and wiring completely concealed inside box enabling use as a file by unsuspecting user**
- **Specially designed connection block disconnects cabling automatically when file is removed from shelf**
- **Can be modified to contain wireless transmitter**
- **Comes with free power supply**
- **Comes with free audio capability**
- **Comes with lint-free cleaning cloth to remove grease and dirt from case and lens**

- ☒ 1/3" CCD
- ▬ 300 TV lines
- ☀ 10.0 lux sensitivity
- ⚡ Supply voltage: 12 Vdc
- 🔊 Audio output: 1V p-p

Lens options

Lens	Product Code
3.6mm pinhole	BF-650/PA
5.5mm pinhole	BF-650/PA/5.5

All lens options are the same price


See Also:



BF-350/PA
Monochrome option



TH-350/PA
Thermostat monochrome camera



PI-350/A
PIR case monochrome camera

SPECIFICATION

Image sensor	MOD-630/P camera module
Horizontal resolution	1/3" CCD sensor, 500 (H) x 582 (V) pixels
Lens options	300 TV lines or greater
Electronic shutter	SEE TABLE
Sensitivity	Automatic linear shutter
Video output	10.0 lux
Supply voltage	PAL, 1Vp-p, 75 Ohms
Working temperature	12 Vdc ± 10%
	-5°C to +40°C

VIDEO

AUDIO

Microphone	Omni-directional electret
Audio output	1Vp-p, 600 Ohms
Audio bandwidth	100Hz - 10KHz, +/- 3dB

Specification and availability of products are subject to change without notice