

2 Page Color Quad Switcher

SCQ-081P



Features

- 8Ch camera input/2Ch video output/VCR input/VCR output
- 240 TV lines of horizontal resolution(quad display only)
- Input channels can be divided into two groups in quad mode
- In the play-back mode, you can enlarge the screen to 200% by using the "ZOOM" key
- An adjustable date/time display feature is provided
- Each channel can be viewed in single display mode
- In auto switcher mode, each channel switches automatically for viewers
- The channel loss feature provides a buzzer sound and displays the channel loss on the screen
- You can make and important-scene freeze in quarter screen mode by using the "FREEZE" key
- Alarm and video loss occurrence details is recorded in "ALARM/LOSS" list(Max. 50 events)
- RS-232C remote control


Video Security Systems

SCQ-081P

Specifications

MODEL	SCQ-081P	
Video Input	Camera : 8Ch (BNC Type), Color or Black and White, Loop Through Out x 8(BNC), Auto Termination 1.0Vp-p, 75 Ω Auto Termination	
Video Output	Monitor 1	he user can select from Quad, Full, Auto switcher mode, 1.0Vp-p, 75 Ω Termination
	Monitor 2	Only Quad Screen(But no screen output during playback mode), 1.0Vp-p, 75 Ω Termination
	VCR	The screen is displayed as the same as VCR OUT on LIVE, and same as MONITOR OUT 1 on playback(But characters are not displayed), 1.0Vp-p, 75 Ω Termination
Horizontal Resolution	240 TV Lines(Quad Display Mode)	
Remote control	RS-232C (D-SUB 25Pin)	
Alarm Input	8Ch, TTL "LOW" Level Active(Use Normal Open Type Sensor)	
Alarm Output	Alarm Out : Relay Make (Normal Open) Alarm Reset : TTL "LOW" Level Active, Pulse Width = Above 150ms	
Alarm Duration	0sec ~ 30min 59sec(The user can set the time from the menu)	
Auto Switcher	Single : 0 ~ 30sec(User must set time in the menu) Quad : 1 ~ 30sec, A, B(A, B are Quad groups)	
Character Indication (OSD)	Title	Each channel indicates maximum 8 characters (Alpha-Numeric, Special Characters)
	Date & Time	Year/Month/Day/, Hour:Minute:Second
	Alarm Indication	"A"
	Channel Loss	"LOSS"
	Freeze	"F"
	Playback Mode	"P.B"
Video Loss Detection	8 Channels	
Memory Back-Up	Above 8 Years	
Operating Temperature	0 ~ +40	
Operating Humidity	20~85% RH	
Power Requirement	AC100~240V, 50/60Hz	
Power Consumption	Less than 11W	
Weight	Approx. 3.8Kg(without packing)	
Dimensions(W x H x D)	430 x 44 x 350mm	

Dimensions

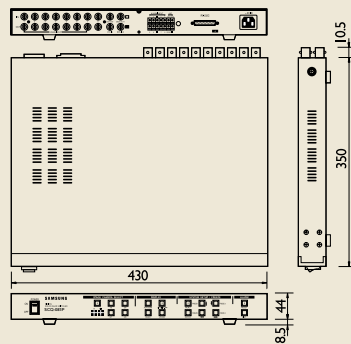

SAMSUNG

ELECTRONICS

Samsung Headquarters

Samsung Electronics Co., Ltd.

416, Maetan-3Dong, Paldal-Gu

Suwon City, Kyungki-Do, Korea 442-742

TEL : 82-31-200-5504, 5578 FAX : 82-31-200-5594

<http://samsungelectronics.com/security/cctv/>

Distributed by:

* Design and specifications are subject to change without notice.