


# 9Ch Multiplexer

## SDM-090P



### Features

- 400 TV lines of horizontal resolution
- Triplex function
- Simultaneous display of VCR replay and live camera feed on a single monitor during recording.
- To be used with a S-VHS recorder for high quality recording
- Various screen display function
- Full screen auto switching, Full screen freeze, Full screen zoom
- Live division screen(Dual\_H,Dual\_V, 4, 7, 9, PIP),Freeze
- Automatic screen switching on the lower right screen in 4 screen mode.
- P.B screen  
(Dual\_H,Dual\_V, 4, 7, 9, Full screen Freeze, Full screen x2, x4 Zoom)
- P.B through output
- Live, P.B simultaneous division screen(2, 4, 9)
- Recording output : selectable frame/field, recording duty time varies by channel list
- Buzzer function : In time of Alarm, Video Loss(9Ch)
- Real time display function(Quad screen)
- Summer time observation function
- Trigger detect function  
(Automatic switching to field recording mode during no trigger)
- Alarm/Loss list 100event
- Timer Recording function
- Security lock function
- Alarm weight value recording function
- RS-232C remote control

# Video Security Systems



## SDM-090P



### Specifications

MODEL	SDM-090P	
Video Input	Camera	9Ch Input(Color, Black and /White), BNC Type, Looped Through Out, 1.0Vp-p, 75 Auto-Termination Type
	VCR	Composite : BNC Type S-VHS Y/C : - Y : 1.0Vp-p, 75 Termination - C : 0.3Vp-p, 75 Termination
Video Output	3Ch Output(Composite 2 Output,/S-VHS 1 Output) Main Monitor - Full, Full Screen Auto Switching, Full Screen Freeze, Full Screen x2, x4 Zoom - Live Division of Screen(Dual_H,Dual_V, 4, 7, 9, PIP),Freeze Division Screen(4 division) Automatic Switching(Bottom of Right) - PB Screen(Dual_H, Dual_V, 4, 7, 9, Full Screen Freeze, Full Screen x2, x4 Zoom) - REC Check Output - PB Through Output - Live, PB Simultaneous Division Screen(2, 4, 9) - Real Time Display of Quad Screen Spot Monitor - Certain Screen Monitoring(Full Screen) S-VHS - at the same of Main Monitor	
Remote Control	RS-232C : D-Sub 9Pin	
Alarm Input	9Ch Input Terminal Block	
Alarm Output	- Relay Out : 2 - Reset Out : 1	
Alarm Loss List Memory	100 Event	
Summer Time Mode	Menu method	
Horizontal Resolution	400 TV Lines	
VCR Trigger	1Ch	
Operating Temperature	0 ~+40	
Operating Humidity	20~85%RH	
Power Requirement	Less than 13.0W	
Power Consumption	Approx. 3.5Kg(without packing)	
Weight	5.0Kg	
Dimensions(W x H x D)	430 x 44 x 350mm	

### Dimensions

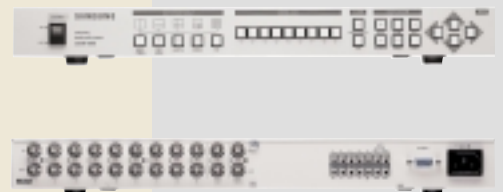

**Samsung Headquarters**  
 Samsung Electronics Co., Ltd.  
 416, Maetan-3Dong, Paldal-Gu  
 Suwon City, Kyungki-Do, Korea 442-742  
 TEL : 82-31-200-5504, 5578 FAX : 82-31-200-5594  
<http://samsungelectronics.com/security/cctv/>

Distributed by:

\* Design and specifications are subject to change without notice.