



SAMSUNG TECHWIN

SMT-4030/3230

Monitors the choice of professionals



SMT-4030/3230

40"/32" LED Monitor

- Super high resolution 600TV lines
- High contrast ratio 5000:1
- Fast response time 8ms
- HDMI, VGA, and Composite video output
- Built-in Speaker
- Ethernet/RS-232C remote control
- Magicinfo Lite : scheduling function auto play function

The SMT-4030/3230 are 40"/32" monitors with Full HD a native 1920x1080 panel resolution optimized for CCTV applications and designed for 24/7 use. Benefiting from the latest onboard LED panel technology that offers excellent picture quality along with a fast 8ms response time. Offering 600TV lines high resolution and various video output via HDMI, VGA and composite, the SMT-4030/3230 is the perfect professional security monitor.




Specifications


		SMT-4030	SMT-3230
DISPLAY			
Type		LED	
Screen Size		40"	32"
Max. Resolution		1,920 x 1,080	
Brightness		500cd/m ²	
Contrast Ratio		5,000 : 1	
Aspect Ratio		16 : 9	
Viewing Angle (H/V)		178° / 178°	
Display Color		16.7million	
Response Time		8ms (G to G)	
Video System		NTSC / PAL	
Panel Life		50,000hours	
Filter Type		3D combfilter	
INTERFACE			
Video	Connector	CVBS, HDMI x 2, Component (D-sub 15pin)	
	Connector	Analogue D-sub, DVI-D, Display port	
	Input Signal	0.7Vp-p ±5%	
RGB / DVI	Available Format	640 x 350@70Hz, 720 x 400@70Hz	
		640 x 480@60Hz/72Hz/75Hz (VGA)	
		800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)	
		1,024 x 768@60Hz/70Hz/75Hz (XGA)	
		1,152 x 864@75Hz, 1,152 x 870@75Hz	
		1,280 x 960@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA)	
HDMI	Connector	HDMI 1, HDMI 2	
	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz	
Audio	Connector	RCA (L/R), Stereo mini jack	
	Output Signal	Loop-through line level (PC only), Speakers : 2 x 5W	
Application Support		Remote controller	
ON SCREEN DISPLAY			
Functions		VESA™ DPM compatible	
Language		English, Spanish, French, German, Italian, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean	
GENERAL			
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)	
	Power Consumption	Type 108W	Type 85W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)	
	Operating Humidity	10% ~ 80% (Non-condensing)	
Mechanical	Dimensions with Stand (WxHxD)	925.4 x 611.0 x 311.0mm (36.43" x 24.06" x 12.24")	
		736.0 x 504.5 x 311.0mm (29.38" x 19.86" x 12.24")	
	Dimensions without Stand (WxHxD)	925.4 x 541.0 x 93.7mm (36.43" x 21.3" x 3.69")	
		736.0 x 434.5 x 93.6mm (29.38" x 17.1" x 3.69")	
	Bezel Size	17.5mm (0.69")	
	Weight	9.3Kg (20.5 lb)	
Cabinet Color	Black		
Rack Mounts	Optional		
VESA Mounts Interface	200 x 200mm		
Accessory		SBM-320ST	

Dimensions

Unit : mm (inch)

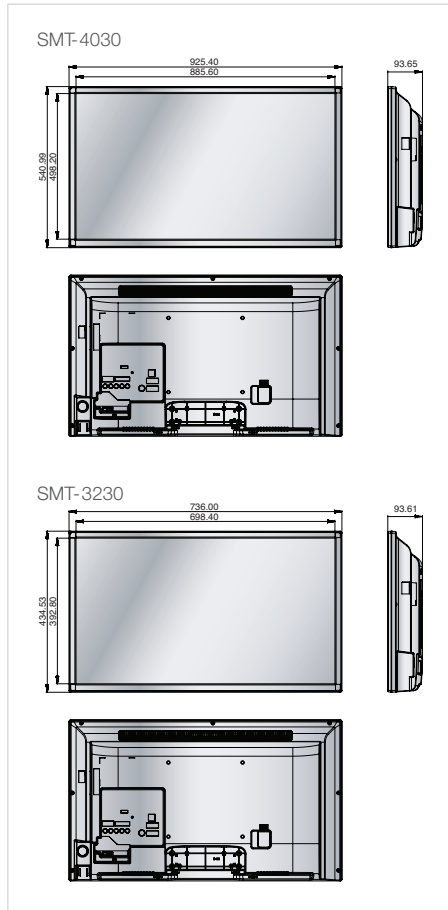

Accessory (optional)

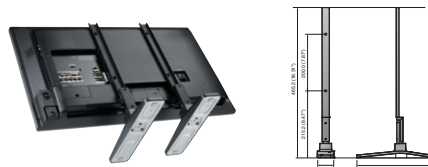

Foot Stand SBM-320ST



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD. 701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA Inc.
100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 OPS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788



SAMSUNG TECHWIN