



DS-2CC176P-A(-C) Box Camera

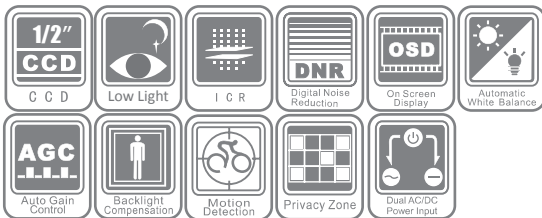

Key Features

- 1/2" Sony EXVIEW HAD CCD
- 540 TVL resolution
- Super low illumination
- OSD menu
- Digital noise reduction
- True day / night
- Highlight compensation

Dimensions

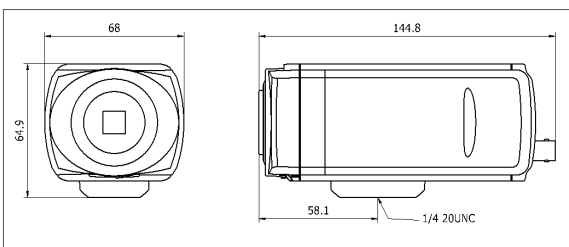

Accessories



Specifications

DS-2CC176P-A(-C)	
Camera	
Image sensor	1/2" Sony EXVIEW HAD CCD
Signal system	PAL
Effective pixels	752 (H) × 582 (V)
Min. illumination	Color: 0.003 lux@F1.2, AGC on, 0.00002 lux@F1.2, AGC on, sens-up × 256 B/W: 0.0003 lux@F1.2, AGC on, 0.000002 lux@F1.2, AGC on, sens-up × 256
Shutter time	1/50s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC/Video drive
Day & night	IR cut filter with auto switch
Horizontal resolution	Color: 540 TVL, B/W: 600 TVL
Synchronization	Internal / Power synchronization
Video output	1Vp-p composite output (75 Ω / BNC)
S/N ratio	More than 50dB
Menu	
Camera ID	On / off (15 letters, adjusted position)
Auto gain control	Low / middle / high / off
D/N mode	Auto1 / auto2 / day / night
Auto white balance	Auto trace WB1 / auto trace WB2 / manual / auto Control
Private mask	On / off, maximum 8 zones
Motion detection	Mode 1 / mode 2 / off
Anti-flicker	On / off
RS-485	Address / protocol / baud Rate
Language	English / Chinese
Video	Gamma correction, digital zoom, digital noise reduction, POS/NEG, mirror, resolution, sharpness, Y, C, blemish detection
General	
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	24 VAC ± 10%, 12 VDC ± 10% (-C series support 100 - 240 VAC)
Power consumption	5W (10W max. with IR cut filter on)
Dimensions	68 × 64.9 × 144.8 mm (2.68" × 2.56" × 5.70")
Weight	500g (1.10 lbs)

Available models

DS-2CC176P-A, DS-2CC176P-C