


DS-2CC5102/5182/51A2P(N)


Indoor Dome Camera

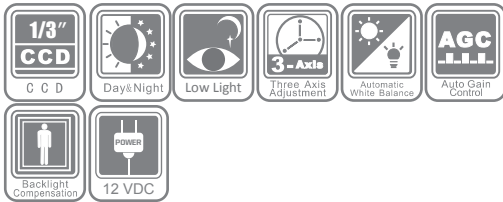

Key features

- High performance Sony CCD
- Low illumination
- Day/Night auto switch
- 3-axis adjustment
- Compact design

Dimensions

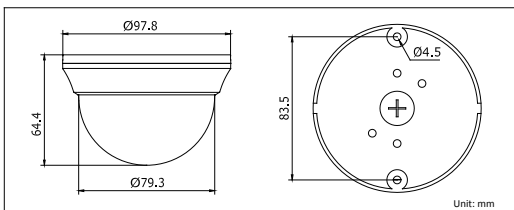

	DS-2CC5102P(N)	DS-2CC5182P(N)	DS-2CC51A2P(N)
Camera			
Image sensor	1/3" SONY CCD	1/3" SONY CCD	1/3" SONY CCD
Signal system	PAL / NTSC		
Effective pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)	0.001 Lux @ (F1.2, AGC ON) 0.0028 Lux @ (F2.0, AGC ON)	0.001 Lux @ (F1.2, AGC ON) 0.0028 Lux @ (F2.0, AGC ON)
Shutter time	PAL: 1 / 50 s to 1 / 100,000 s NTSC: 1 / 60 s to 1 / 100,000 s		
Lens	3.6 mm @ F2.0 (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) Angle of view: 78° (3.6 mm)		
Lens mount	M12		
Angle adjustment	Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°		
Day & night	Electronic		
Horizontal resolution	420 TVL	600 TVL	700 TVL
Synchronization	Internal synchronization		
Video output	1Vp-p composite output (75 Ω / BNC); Test monitor out [1Vp-p composite output (75 Ω / BNC), device line]		
S / N ratio	More than 50dB	More than 62 dB	More than 62 dB
General			
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)		
Power supply	12 VDC ± 10%		
Power consumption	Max.2W		
Dimensions	Φ 97.8 x 64.4 mm (φ 3.85" x 2.54")		
Weight	300g (0.66 lbs)		

Available models

PAL: DS-2CC5102P, DS-2CC5182P, DS-2CC51A2P
NTSC: DS-2CC5102N, DS-2CC5182N, DS-2CC51A2N