



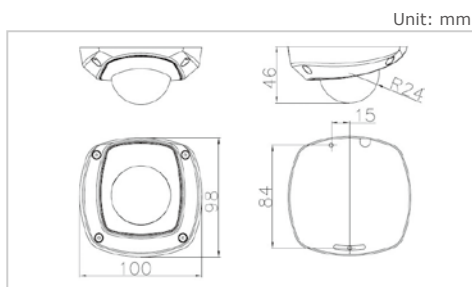

DS-2CD7133-E VGA Real-time CMOS Mini Vandal-proof Network Indoor Dome Camera

- Real time video display at VGA(640×480)
- Adopt advanced video compression with high compression ratio
- PoE
- IP66

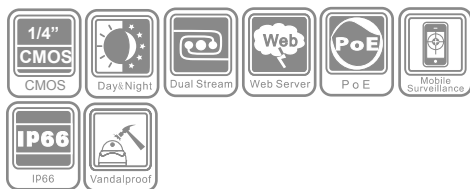

Unit: mm

Specifications

		DS-2CD7133-E
Camera	Image Sensor	1/4 " CMOS
	Effective Pixels	640 (H) × 480 (V)
	Min. Illumination	0.4 Lux @ F1.2; 0.9 Lux @ F1.8
	Electronic Shutter	1/25s ~1/100,000s
	Day&Night	Electronic
	Lens	4mm, F1.8 Fixed Iris(2.8, 6, 8mm optional)
	Angle of view	71°(4mm Lens)
	Video Parameter	Saturation/Brightness/Contrast adjustable through client software or web browser
	Adjustment Range	Pan±15°, Tilt0~90°, Rotation±15°
	Compression Standard	Video Compression
Video Bit Rate		32 Kbps~8Mbps
Audio Compression		OggVorbis
Image	Max. Image Resolution	640×480
	Frame Rate	50Hz:25fps @ 640×480 60Hz:30fps @ 640×480
Functions	Storage	Support NAS, (iSCSI optional)
	Intelligent Alarm	Motion Detection
	Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, PPPoE, SMTP, NTP (SNMP,HTTPS, FTP, SIP, 802.1x, IPv6 optional)
	Basic	Reset button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
Interface	3-Axis adjustment	Yes
	Audio	Built-in Microphone optional
	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet port
General	Power Supply	DC12V±10% / PoE
	Power Consumption	4W MAX
	Working Temperature	-10°C~60°C(14°F~140°F)
	Working Humidity	90% or less
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, up to IK10
	Weather Proof	IP66
	Dimension	100×97.5×46.5mm(3.94"×3.84"×1.83")
Weight	250g(0.55lbs)	

Available Models

DS-2CD7133-E