



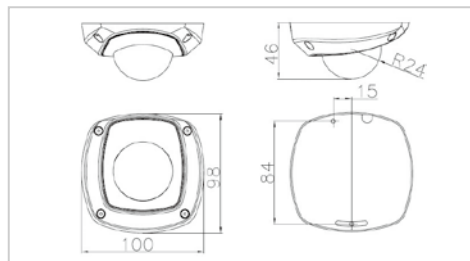

DS-2CD7153-E 2M CMOS Mini Vandal-proof Network Indoor Dome Camera

- Maximum Resolution up to 2 mega, 12.5 fps(50Hz)/15 fps(60Hz) @ 1600×1200, real time video at Full HD 720P
- Adopt advanced video compression with high compression ratio
- Progressive scan CMOS, capture motion video without sawtooth
- ePTZ
- PoE

Unit: mm

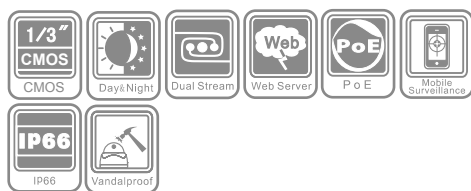

Specifications

		DS-2CD7153-E
Camera	Image Sensor	1/3 " CMOS
	Effective Pixels	1600 (H) × 1200 (V)
	Min. Illumination	0.5 Lux @ F1.2; 0.1 Lux @ (F1.2, sense up x 5); 1.1 Lux @ F1.8; 0.2 Lux @ (F1.8, sense up x 5)
	Electronic Shutter	1/25s ~1/100,000s
	Day&Night	Electronic
	Lens	4mm, F1.8 Fixed Iris(2.8, 6, 8mm optional)
	Angle of view	90°(4mm Lens)
	Video Parameter	Saturation/Brightness/Contrast adjustable through client software or web browser
Compression Standard	Video Compression	H.264/MJPEG
	Video Bit Rate	32 Kbps~16Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	1600×1200
	Frame Rate	50HZ: 12.5fps (1600×1200), 12.5fps (1600×912), 25fps (1280×960), 25fps (1280×720) 60HZ: 15fps (1600×1200), 15fps (1600×912), 25fps (1280×960), 30fps (1280×720)
	e-PTZ	Yes
Functions	Storage	Support NAS, ISCSI(Optional)
	Intelligent Alarm	Motion Detection
	Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, PPPoE, SMTP, NTP (SNMP,HTTPS, FTP, SIP, 802.1x, IPv6 optional)
	Basic	Reset button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
Interface	3-Axis adjustment	Yes
	Audio	Built-in Microphone optional
General	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet port
	Power Supply	DC12V±10% / PoE
	Power Consumption	4W MAX
	Working Temperature	-10°C~60°C(14°F~140°F)
	Working Humidity	90% or less
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, up to IK10
	Weather Proof	IP66
	Dimension	100×97.5×46.5mm(3.94"×3.84"×1.83")
Weight	250g(0.55lbs)	

Available Models

DS-2CD7153-E