




DS-2CD753F-E(I) 2 Megapixel CMOS-based Vandal Proof Network Dome Camera

- Up to 2 Megapixel resolution
- H.264/MJPEG video compression with high compression ratio
- Progressive scan CMOS
- Up to 32 GB SD/SDHC card local storage
- Two-way audio
- ePTZ
- PoE

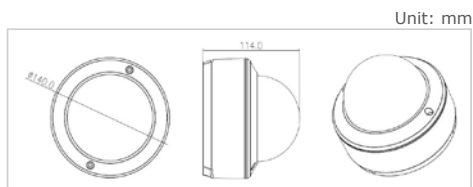

Unit: mm

Specifications

		DS-2CD753F-E(I)
Camera	Image Sensor	1/3 " Progressive Scan CMOS
	Min. Illumination	0.5Lux @ F1.2, 0.1Lux @(F1.2, sensitivity ×5) -I: 0 Lux with IR on
	Electronic Shutter	1/25s~1/100,000s
	Lens	2.7-9mm @ F1.2 Angle of view: 101°~30.4°
	Lens Mount	φ14
	Auto Iris	DC Drive
	Adjustment Range	Pan0~360°, Tilt0~75°, Rotation0~360°
	Day / Night	Electronic (-I: IR cut filter with auto switch)
Compression Standard	Video Compression	H.264/MJPEG
	Bit rate	32 Kbps~16Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	1600 x 1200
	Frame Rate	50HZ: 12.5fps (1600×1200), 12.5fps (1600×912), 25fps (1280×960), 25fps (1280×720) 60HZ: 15fps (1600×1200), 15fps (1600×912), 25fps (1280×960), 30fps (1280×720)
	Video Parameter	Saturation, Brightness, Contrast adjustable through client software or web browser
Function	e-PTZ	Yes
	Storage	Support SD/SDHC, NAS(iSCSI optional)
	Intelligent Alarm	Motion Detection, Video Loss, Network Disconnect, IP address conflict, Storage exception
	Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, FTP, SIP, SRTP, 802.1x, IPv6 optional)
Interface	Basic	Reset Button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, Watermark
	MIC Input	1 channel microphone input, 3.5mm mini-jack
	Audio Output	1 channel 3.5mm audio interface (Line level, 600Ω)
	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet interface, 1 RS-485 interface
	Alarm Input	2 channel
	Alarm Output	2 channel
	Video Output	1Vp-p Composite Output (75Ω/RCA)
General	Operating Condition	-10°C~60°C(14°F~140°F), Humidity 90% or less(non-condensing)
	Power Supply	DC12V±10% / PoE (AC24V optional)
	Power Consumption	4.5W MAX -I: 6W MAX(6.5W MAX with ICR working)
	Impact Protection	IEC60068-2-75Eh,50J;EN50102, up to IK10
	IR Range	-I: Within 10-20 meters (32.8-65.6ft)
	Dimension	Φ140mm×114mm (Φ5.51"×4.49")
Weight	1400g (3.08lbs)	

Available Models

DS-2CD753F-E, DS-2CD753F-EI

*-I: support infrared LED